

A

B

C

D

E

F

G

H

REV

REV

REV

REV



REV

REV

REV

REV

REV

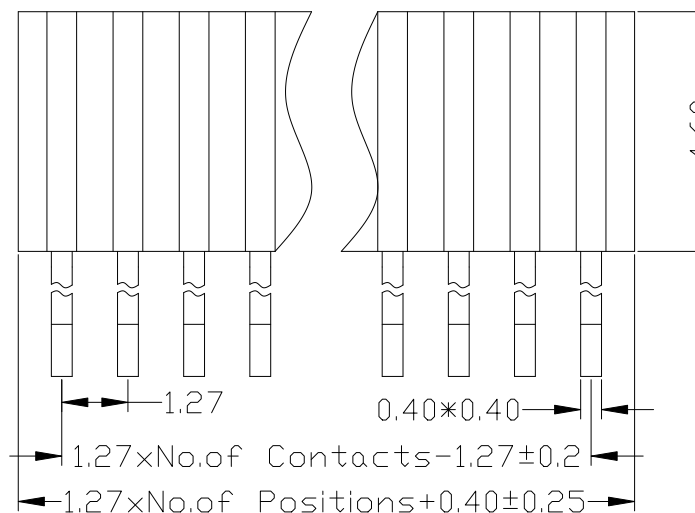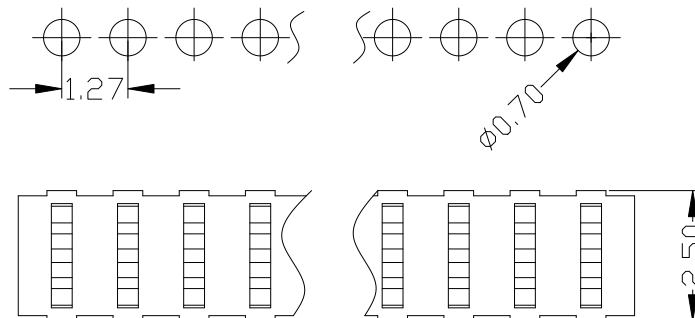

A

F346-11 XX XX X SY | AX

NO.OF PINS
PER ROW
1~50P

Conta
Full Of C
A0=0.8u"

Plating
Semi-gold
B0=0.8U"

INSULATOR
MATERIAL :
B:PA6T

PACKING
A:PE Bag
B:Tape &

g
& Ree l


A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

B1=1U"
B2=1.5U"
B3=2U"
B4=3U"
B5=5U"
B6=10U"
B7=15U"
B8=20U"
B9=30U"

C:PA9T
D:LCP

C:Tube
D:Tube+O
E:Tray

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

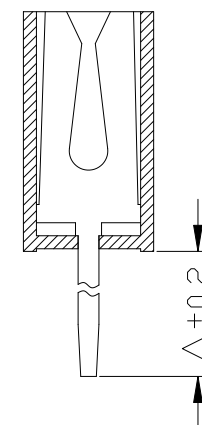

DIM"A"	1.60	2.40	3.00
--------	------	------	------

					OPERATION		SCALE		Fit	上海高霖电子有限公司		
					X.X	±0.25	UNIT		MM			
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F346-11XXXXXSYX1
					X.XXX	±0.10						
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	1.27mm 单排母 塑高4.6 180度 Y型
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	

上海高霖电子有限公司

卢小强

PART NO. _____

F346-11XXXXSYX1

TITLE:

1.27mm 单排母 塑高4.6 180度 Y型

Customer No.

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black

端子: 磷铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.



Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

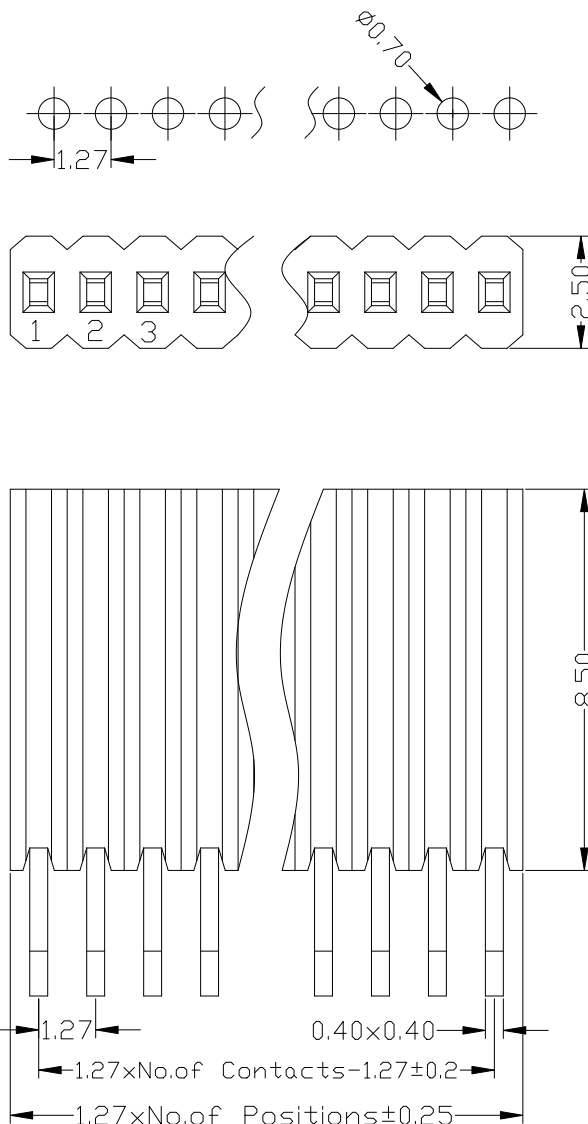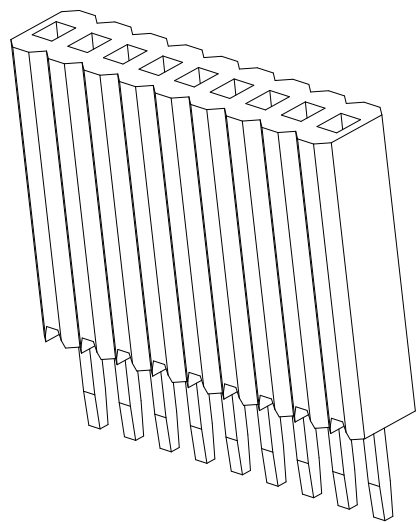

Ordering Information

F385-11 XX XX X SY AX

NO. OF PINS
PER ROW
1~50P


Contact Plating
Full Of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

Semi-gold
B0=0.8u"
B1=1u"
B2=1.5u"
B3=2u"
B4=3u"
B5=5u"
B6=10u"
B7=15u"
B8=20u"
B9=30u"

INSULATOR
MATERIAL:
A: PBT
B: PA6T
C: PA9T
D: LCP

PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

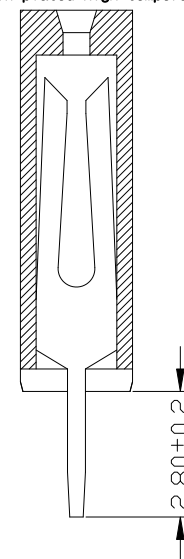

				OPERATION		SCALE		Fit	上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强			
				X.XXX	±0.10	SHEET	1/1	CHECK				
				Angle	±3°	PROJ.	APPROVE	APPROVE	PART NO.			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.				

上海高霖电子有限公司

卢小强

PART NO.

F385-11XXXXXSX1

TITLE:

1.27mm 单排母 塑高8.5 180度 Y型

Customer No.