
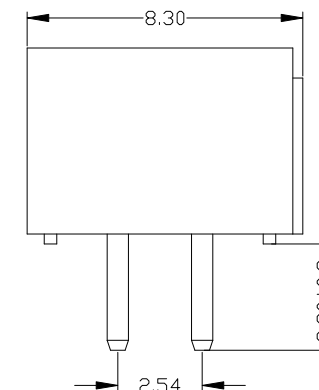
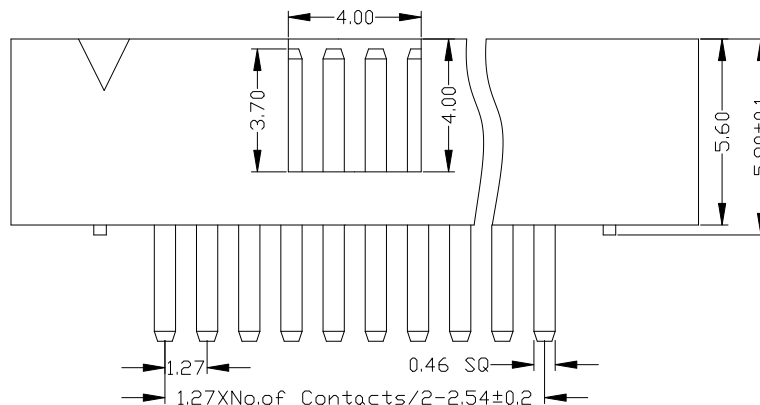
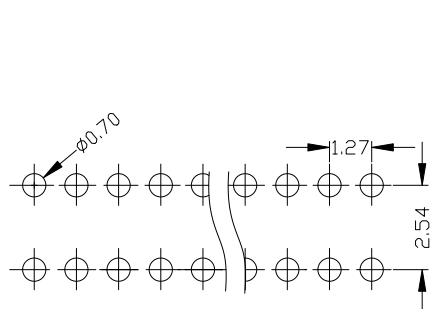


Ordering Information

NO.OF PINS	Contact Plating		INSULATOR	B:Black	PACKING
4-100P	Full Of Gold	Semi-gold	MATERIAL:	G:Grey427	A:PE Bag
	A0=0.8u"	B0=0.8U"	B:PA6T	E:Grey413	B:Tape & Reel
	A1=1u"	B1=1U"	C:PA9T	W:White	C:Tube
	A2=1.5u"	B2=1.5U"	D:LCP	U:Blue	D:Tube+CAP
	A3=2u"	B3=2U"			E:Tray
	A4=3u"	B4=3U"			
	A5=5u"	B5=5U"			
	A6=10u"	B6=10U"			
	A7=15u"	B7=15U"			
	A8=20u"	B8=20U"			
	A9=30u"	B9=30U"			
	S1=Ordinary Tin Plated				
	S2=Matte Tin Plated				
	S3=Tin-plated High-temperature				

Temperature Range: -40°C to +105°C

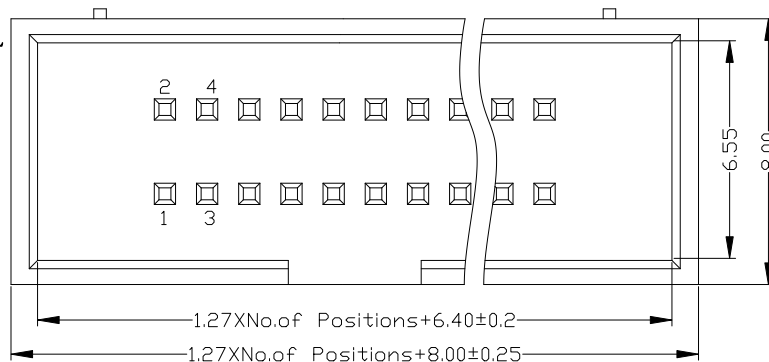

					OPERATION		SCALE		Fit	上海高霖电子有限公司		
					X.X	±0.25	UNIT		MM			
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	B459-1XXXXXSXX1
					X.XXX	±0.10						
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	1.27X2.54 简牛 塑高5.9 180度
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	

A

B

C

D


E

F

G

H

1

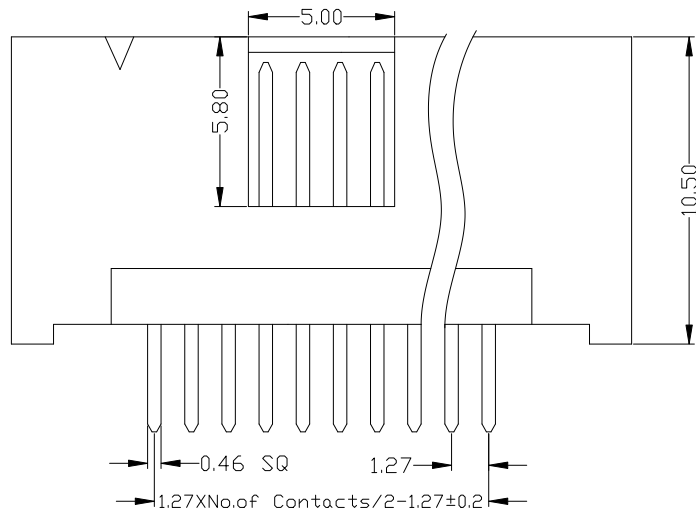

Technical drawing of a mechanical part showing dimensions: 3.00 ± 0.2 , 1.91 , and 5.71 ± 0.2 .

TYPE 2

上海高霖电子有限公司

卢小强

PART NO.

B410-1XXXXXSXXX