

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Brass, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperture Range: -40°C to +105°C

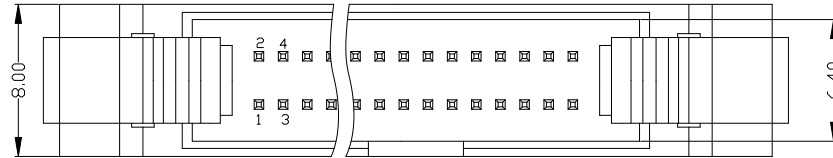

Ordering Information

E403-1 XX XX X S X X

NO. OF PINS	Contact Plating	INSULATOR	B: Black	PACKING
6-64P	Full Of Gold	Semi-gold	MATERIAL: B: PA6T	A: PE Bag
A0=0.8u"	B0=0.8u"	C: PA9T	E: Grey413	B: Tape & Reel
A1=1u"	B1=1U"	D: LCP	U: Blue	C: Tube
A2=1.5u"	B2=1.5U"			D: Tube+CAP
A3=2u"	B3=2U"			E: Tray
A4=3u"	B4=3U"			
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

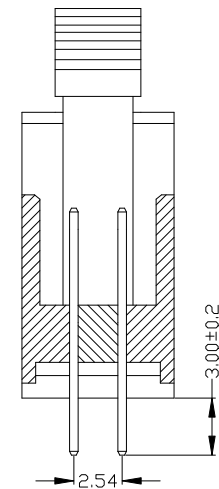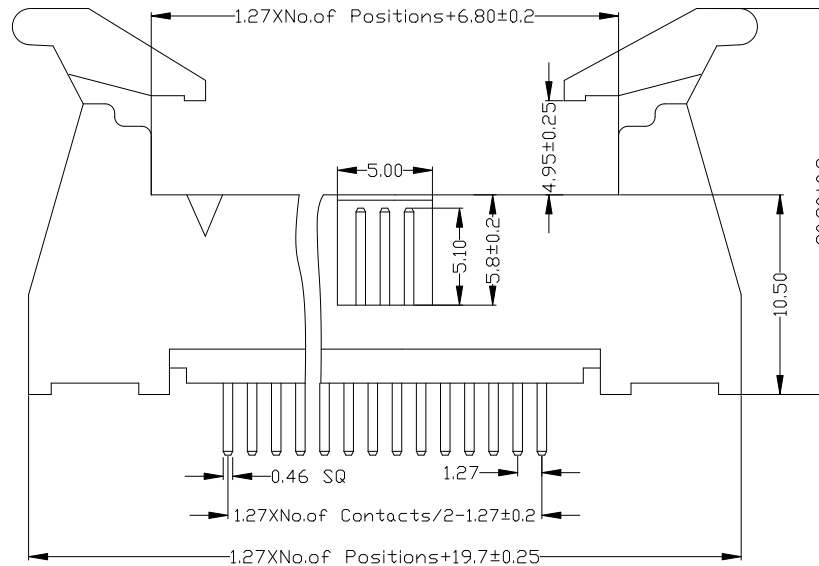

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE A4

SHEET 1/1

PROJ.

Fit

MM

DESIGN

CHECK

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

TITLE:

Customer No.

E403-1XXXXXSXX1

1.27*2.54 牛角 180度

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
-----	------	--------------------------	--------	---------