

Specifications




备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.
 Housing: PA6T+30%G. F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金1u"MIN
 Contact: Brass, 1u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):


额定电流: 1 AMP
 Rating Current: 1 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to +105°C
 Temperature Range: -40°C to +105°C

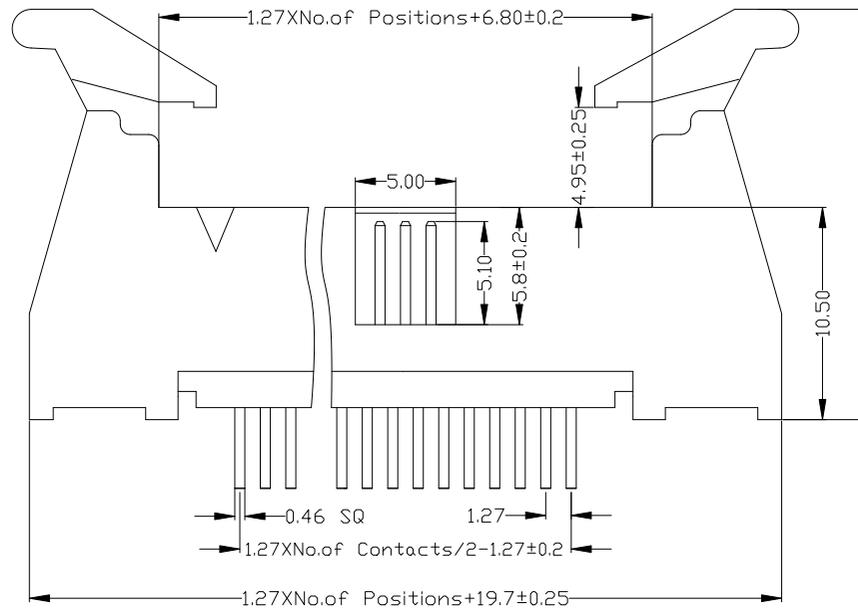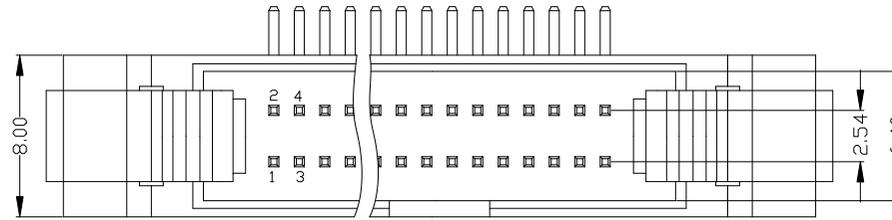

Ordering Information

E403-1 XX XX X R X X

NO. OF PINS 6-64P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	INSULATOR MATERIAL: B: PA6T C: PA9T D: LCP	B: Black G: Grey427 E: Grey413 W: White U: Blue	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature				

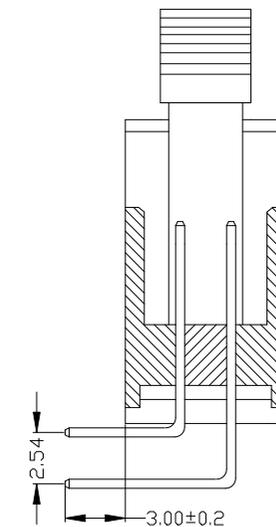

上海高霖电子有限公司

		OPERATION		SCALE		Fit	
		X.X	±0.25	UNIT		MM	
		X.XX	±0.20	SIZE	A4	DESIGN	卢小强
		X.XXX	±0.10	SHEET	1/1	CHECK	PART NO.
		Angle	±3°	PROJ.	⊕	APPROVE	TITLE:
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE		Customer No.

PART NO. E403-1XXXXRXX1
 TITLE: 1.27*2.54 牛角 90度

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Brass, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C




Temperature Range: -40°C to+105°C

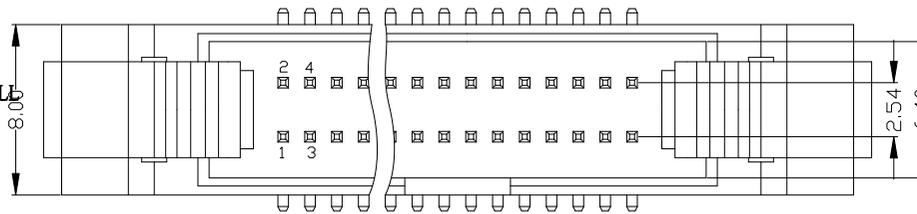

Ordering Information

E403-1 XX XX X M X X

NO. OF PINS 6-64P	Contact Plating		INSULATOR MATERIAL: B: PA6T C: PA9T D: LCP	B: Black G: Grey427 W: White U: Blue	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
	Full Of Gold	Semi-gold			
A0=0.8u"	B0=0.8U"	B1=1U"			
A1=1u"	B1=1.5U"	B2=2U"			
A2=1.5u"	B2=3U"	B3=3U"			
A3=2u"	B3=5U"	B4=10U"			
A4=3u"	B4=15U"	B5=20U"			
A5=5u"	B5=30U"				
A6=10u"					
A7=15u"					
A8=20u"					
A9=30u"					
S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature					

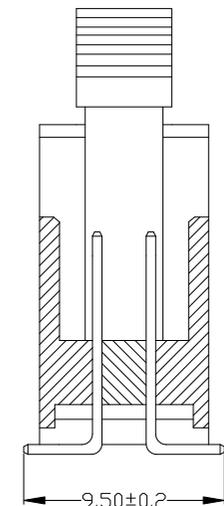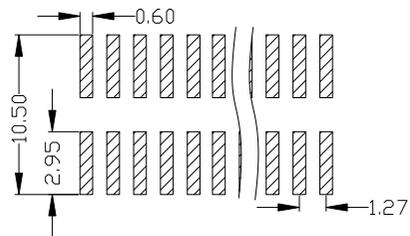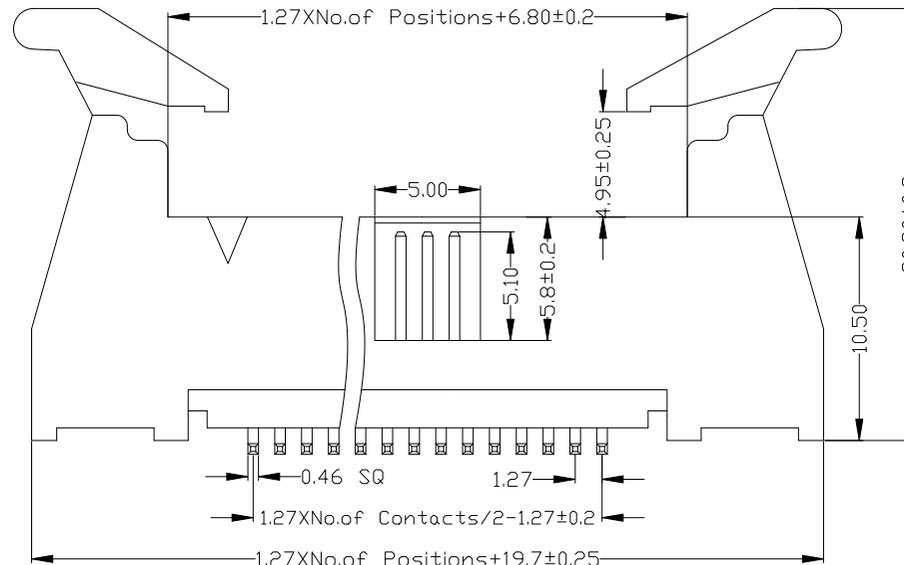

上海高霖电子有限公司

				OPERATION		SCALE		Fit		卢小强 PART NO. E403-1XXXXXXMXX1 TITLE: 1.27*2.54 牛角 SMT Customer No.		
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN				
				X.XXX	±0.10	SHEET	1/1	CHECK				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE				
					DIM	TOL						