

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperature Range: -40°C to +105°C

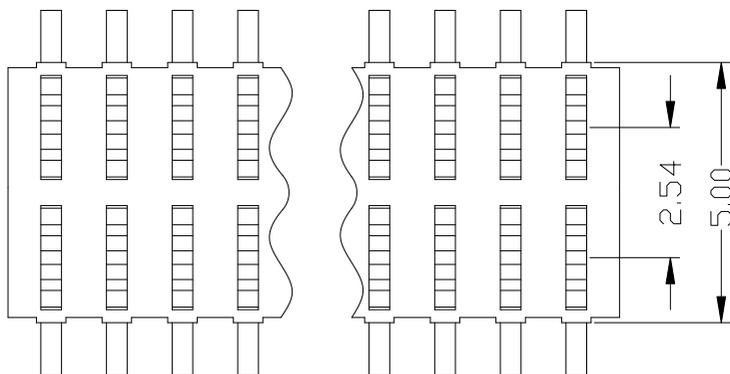

Ordering Information

F446-12 XX XX X MY A X

NO. OF PINS PER ROW 2~50P	Contact Plating	INSULATOR MATERIAL:	PACKING
A0=0.8u"	Full Of Gold	B: PA6T	A: PE Bag
A1=1u"	Semi-gold	C: PA9T	B: Tape & Reel
A2=1.5u"	B0=0.8U"	D: LCP	C: Tube
A3=2u"	B1=1U"		D: Tube+CAP
A4=3u"	B2=1.5U"		E: Tray
A5=5u"	B3=2U"		
A6=10u"	B4=3U"		
A7=15u"	B5=5U"		
A8=20u"	B6=10U"		
A9=30u"	B7=15U"		
	B8=20U"		
	B9=30U"		
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		

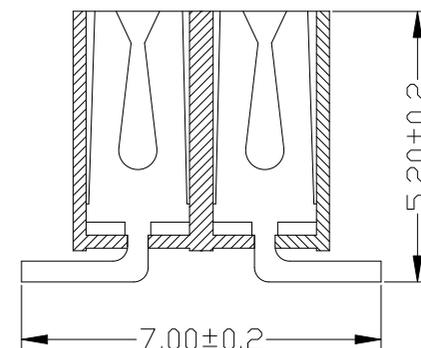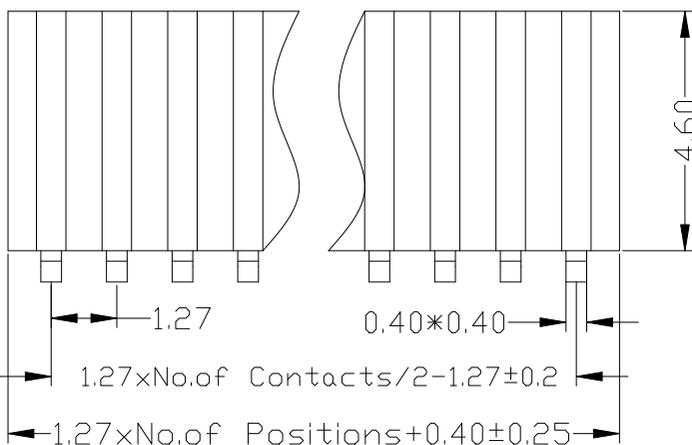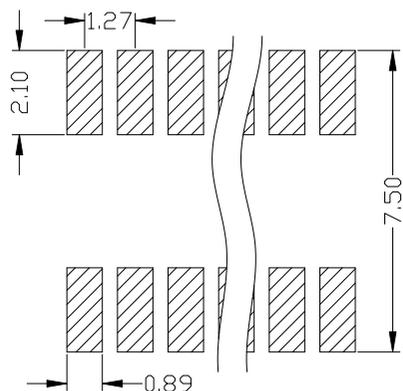

				OPERATION		SCALE		Fit		上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F446-12XXXXXXMYX1		
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.27mm*2.54 双排母 塑高4.6 SMT Y型		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.			
					DIM	TOL							

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperature Range: -40°C to +105°C

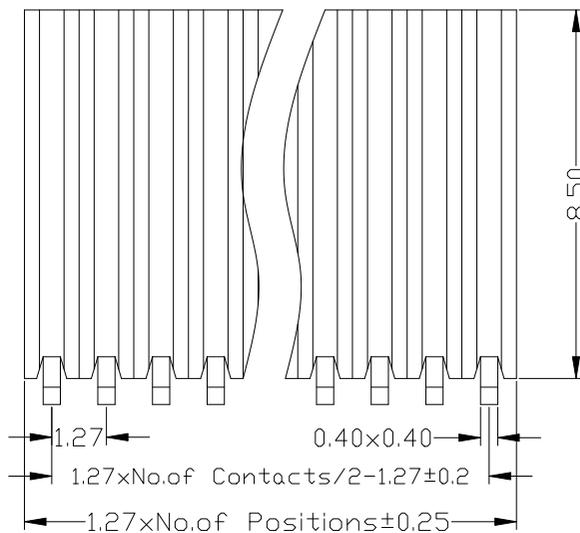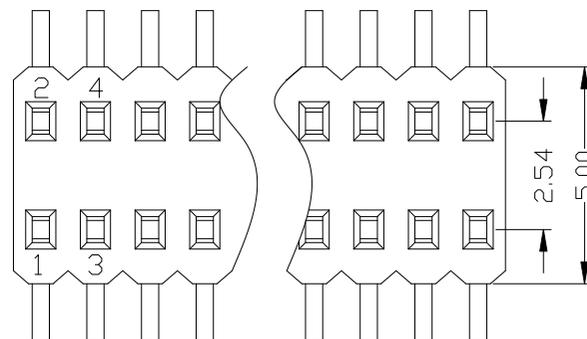

Ordering Information

F485-12 XX XX X MY A X

NO. OF PINS PER ROW 2~50P	Contact Plating Full Of Gold	Semi-gold	INSULATOR MATERIAL:	PACKING
A0=0.8u"	B0=0.8U"	B: PA6T	A: PE Bag	B: Tape & Reel
A1=1u"	B1=1U"	C: PA9T	C: Tube	D: Tube+CAP
A2=1.5u"	B2=1.5U"	D: LCP	E: Tray	
A3=2u"	B3=2U"			
A4=3u"	B4=3U"			
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

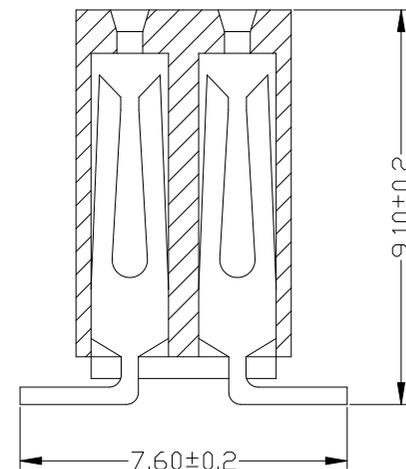

				OPERATION		SCALE		Fit		上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F485-12XXXXXXMYX1		
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.27mm*2.54 双排母 塑高8.5 SMT Y型		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.			
					DIM	TOL							