

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

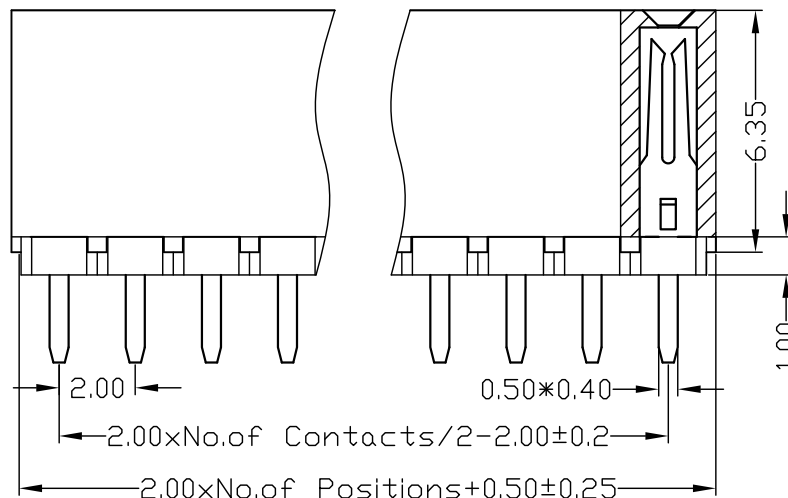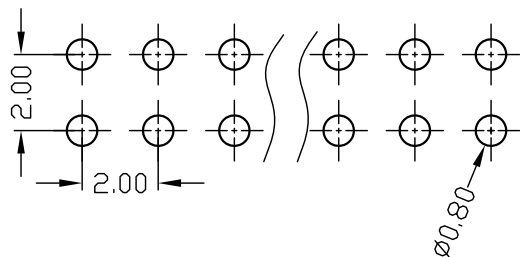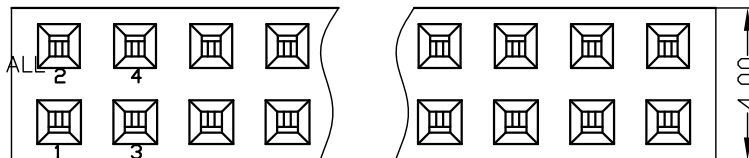

Ordering Information

F263-22 XX XX X SY

NO.OF PINS
PER ROW
2~40P

Contact Plating
Full Of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

INSULATOR MATERIAL:
A:PBT
B:PA6T
C:PA9T
D:LCP

PACKING
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

上海高霖电子有限公司

卢小强

PART NO.

F263-22XXXXXXSY1

TITLE:

2.0mm双排母 塑高6.35 180度 加塑胶 (H=1.0) 总高7.0 Y型

Customer No.

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

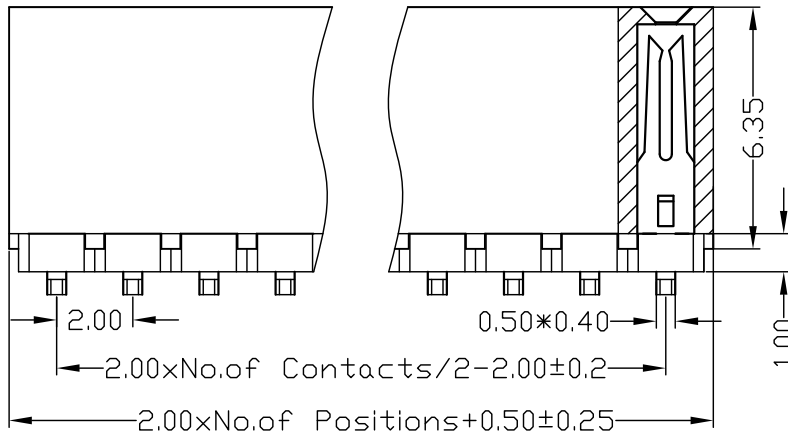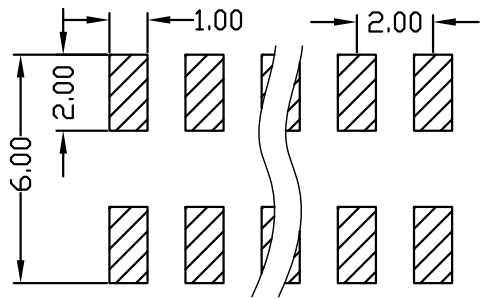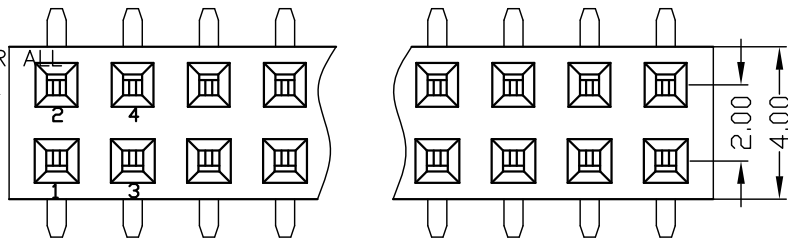

Ordering Information

F263-22 XX XX X MYA


NO.OF PINS
PER ROW
2~40P

Contact Plating
Full Of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

Semi-gold
B0=0.8u"
B1=1u"
B2=1.5u"
B3=2u"
B4=3u"
B5=5u"
B6=10u"
B7=15u"
B8=20u"
B9=30u"

INSULATOR MATERIAL:
A: PBT
B: PA6T
C: PA9T
D: LCP

PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

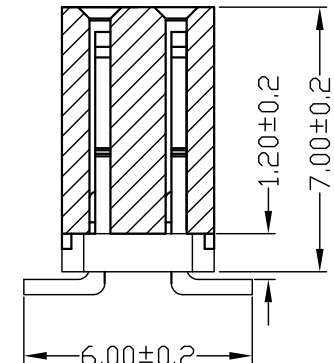

					OPERATION		SCALE		Fit	上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F263-22XXXXXMYX1	
					X.XXX	±0.10							
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.0mm双排母 塑高6.35 SMT 加塑胶 (H=1.0) 总高7.0 Y型	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.






Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

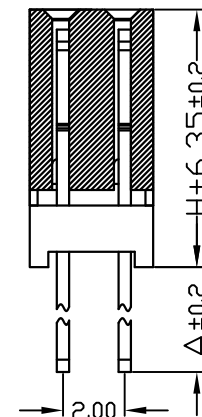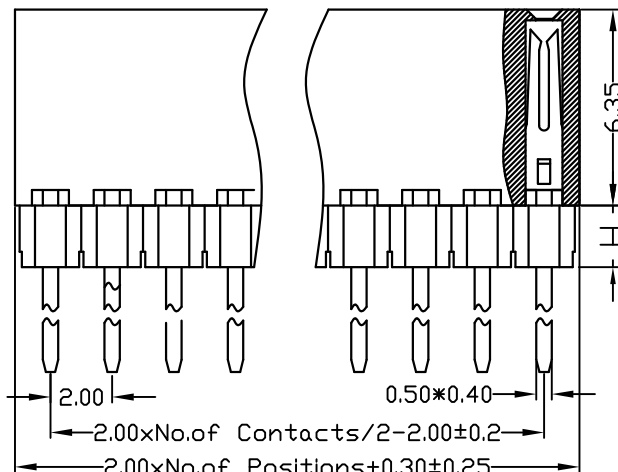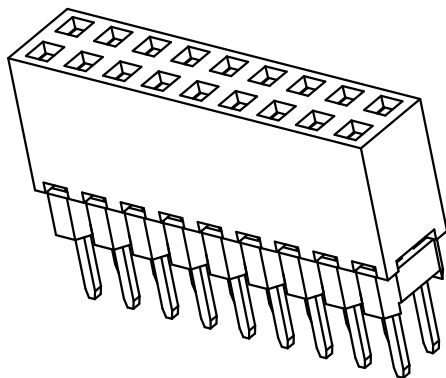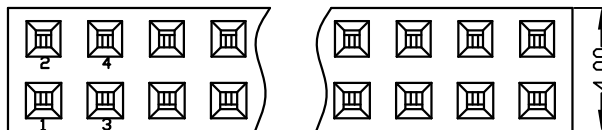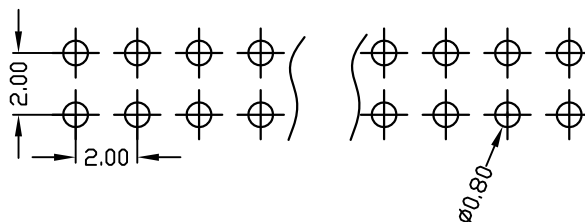

DIM"A"	2.4	2.8	3.0	3.4	13.1
"H"	1.0	1.5	2.0		

Ordering Information

F263-22 XX XX X SY

NO.OF PINS
PER ROW
2~40P

Contact Plating

Full Of Gold

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

Semi-gold

B0=0.8U"

B1=1U"

B2=1.5U"

B3=2U"

B4=3U"

B5=5U"

B6=10U"

B7=15U"

B8=20U"

B9=30U"

INSULATOR

MATERIAL:

A: PBT

B: PA6T

C: PA9T

D: LCP

PACKING

A: PE Bag

B: Tape & Reel

C: Tube

D: Tube+CAP

E: Tray

上海高霖电子有限公司

卢小强

PART NO.

F263-22XXXXXXSY1

TITLE:

2.00mm双排母 双塑 塑高6.3 180度 Y型

Customer No.

OPERATION

SCALE

FIT

X.X ±0.25

UNIT

MM

X.XX ±0.20

SIZE

A4

DESIGN

X.XXX ±0.10

SHEET

1/1

CHECK

Angle ±3°

PROJ.

APPROVE

DIM TOL

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE

1

2

3

4

5

6





7

8

9

10

Temperture Range: -40°C to+105°C

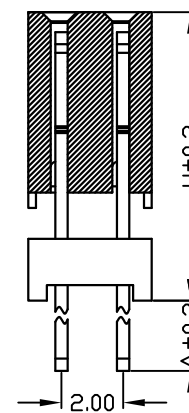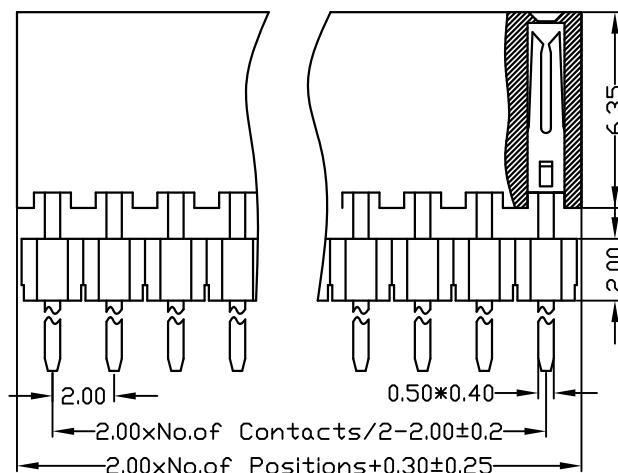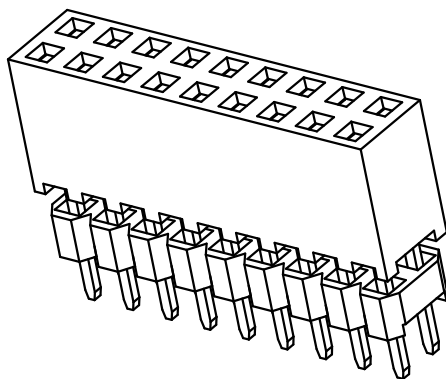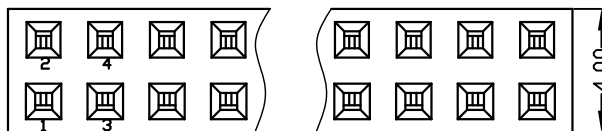

DIM"A"	2.28	11.90	
DIM"H"	9.35		

F263-22 XX XX X SY

NO.OF PINS
PER ROW
2~40P

Contact Plating

Full Of Gold Semi-gold

$$A_0 = 0.8u'' \quad B_0 = 0.8U''$$

A1=1u" B1=10"

A2=1.5u" B2=1.5u"

A3=2u'' B3=2U''

$$A_4 = 3u'' \qquad B_4 = 3U''$$

A5=5u" B5=5U"

A6=10u" B6=10U"
A7=15u" B7=15U"

A7=150 B7=150
A8=200" B8=200"

A9=30u'' B9=30U''

S1=Ordinary Tin Plated

S2=Matte Tin Plated
S3= Tin plated High temp

S3=Thin-plated High-tempe

INSULATOR

MATERIAL:

A:PBT
B:PA6T

C:PA9T

D:LCP

rature

PACKING

A:PE Bag

B: Tape &
C: Tube

D: Tube + C

E:Tray

					OPERATION		SCALE		FIT		上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM					
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F263-22XXXXXSX2		
					X.XXX	±0.10								
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.00mm双排母 双塑 塑高6.3 180度 Y型		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.			