

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C



Temperature Range: -40°C to +105°C

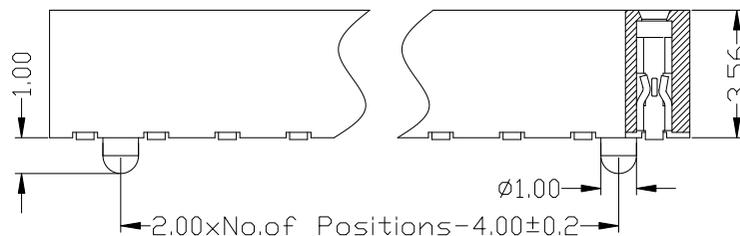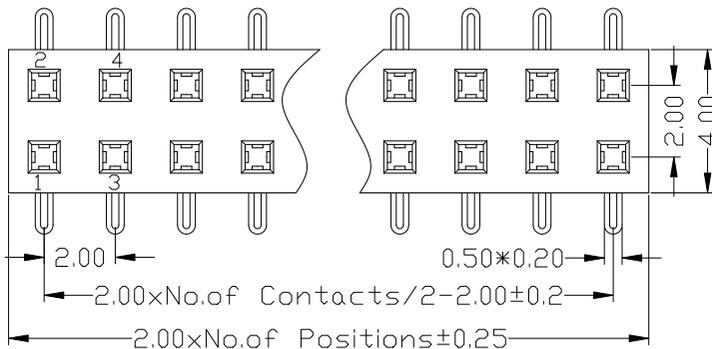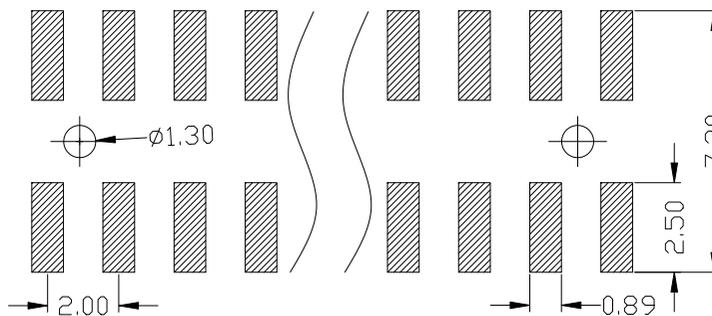

Ordering Information

F235-12 XX XX X MU A X

NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	PACKING
2~40P	Full Of Gold	Semi-gold	A: PE Bag
	A0=0.8u"	B0=0.8U"	B: Tape & Reel
	A1=1u"	B1=1U"	C: Tube
	A2=1.5u"	B2=1.5U"	D: Tube+CAP
	A3=2u"	B3=2U"	E: Tray
	A4=3u"	B4=3U"	
	A5=5u"	B5=5U"	
	A6=10u"	B6=10U"	
	A7=15u"	B7=15U"	
	A8=20u"	B8=20U"	
	A9=30u"	B9=30U"	
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		

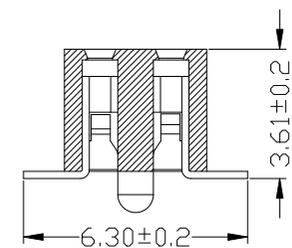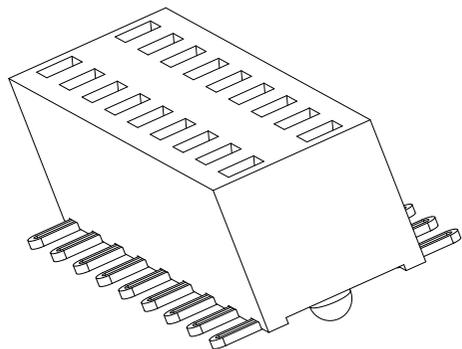

					OPERATION		SCALE		Fit		上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM					
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F235-12XXXXXXMUX2		
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.00mm 双排母 塑高3.5 SMT 带柱 U型		
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.			

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.





温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

Ordering Information

F240-12 XX XX X MU A X

NO. OF PINS PER ROW 2~40P	Contact Plating Full Of Gold	Semi-gold	INSULATOR MATERIAL:	PACKING
A0=0.8u"	B0=0.8U"	B:PA6T	A:PE Bag	
A1=1u"	B1=1U"	C:PA9T	B:Tape & Reel	
A2=1.5u"	B2=1.5U"	D:LCP	C:Tube	
A3=2u"	B3=2U"		D:Tube+CAP	
A4=3u"	B4=3U"		E:Tray	
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

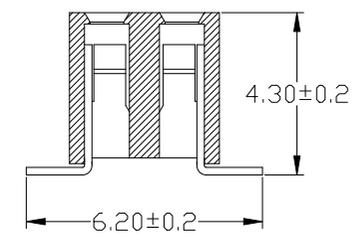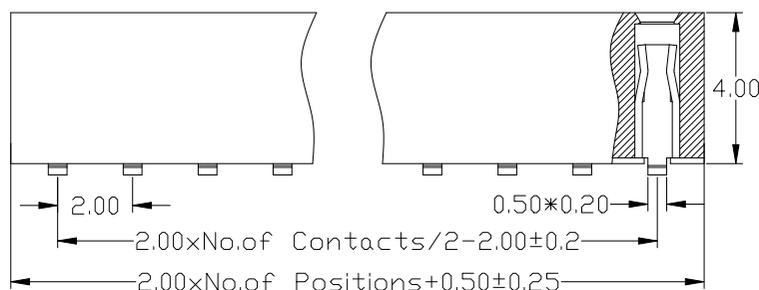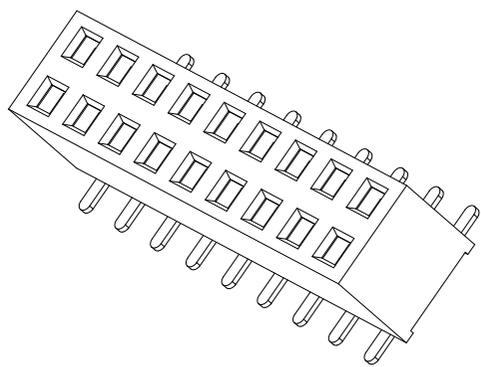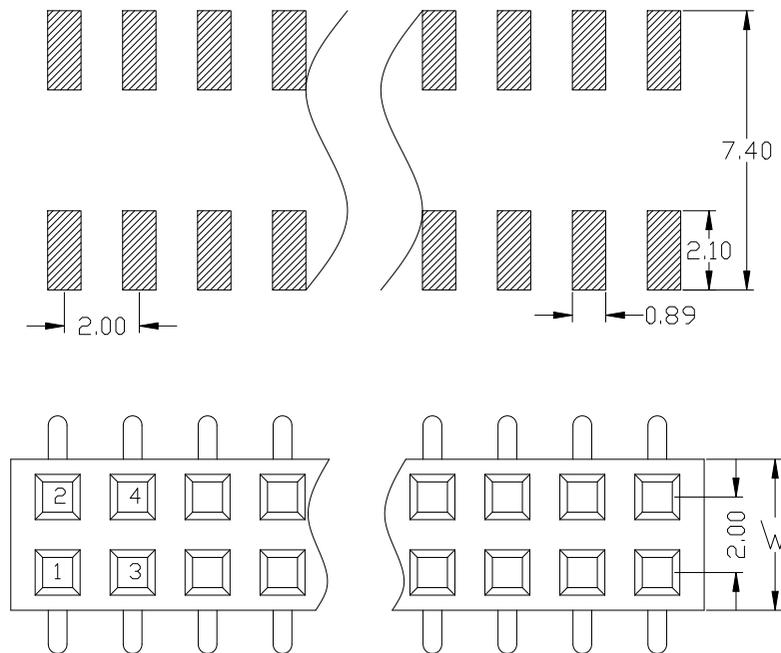

DIM"W"	4.0	4.5
--------	-----	-----

上海高霖电子有限公司

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit		上海高霖电子有限公司		
					X.X	±0.25	UNIT	MM					
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F240-12XXXXXMUX1	
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.00mm 双排母 塑高4.0 SMT U型	
					Angle	±3°	PROJ.	☉	APPROVE		Customer No.		

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperature Range: -40°C to +105°C

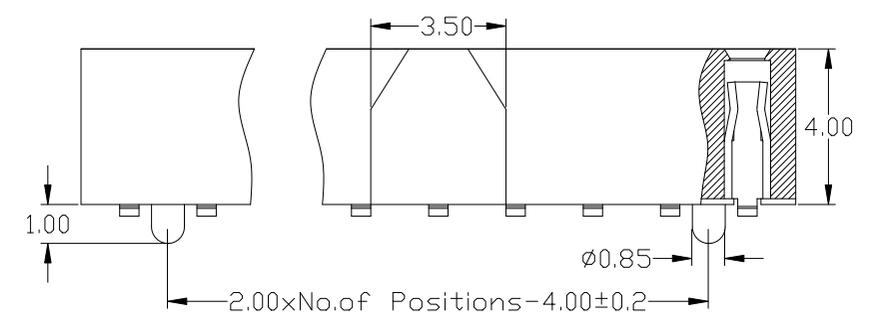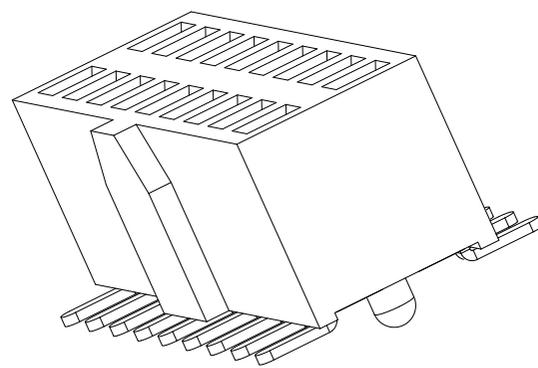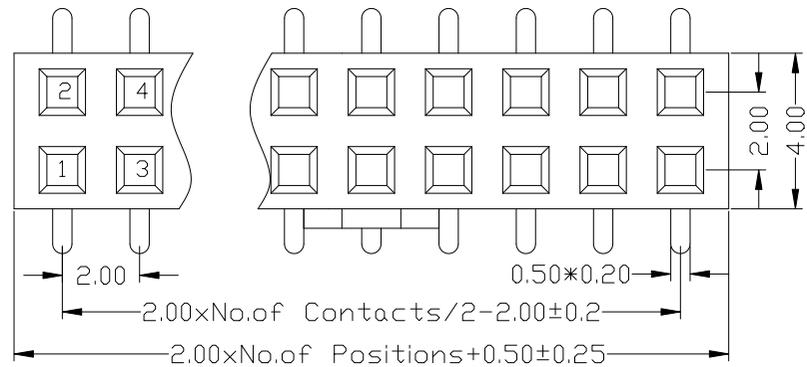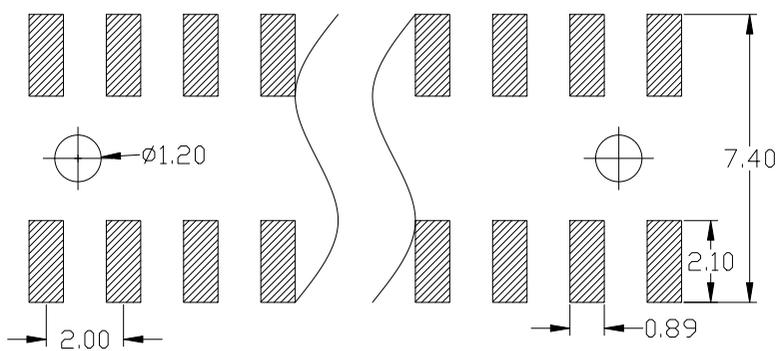

Ordering Information

F240-12 XX XX X MU A X

NO. OF PINS PER ROW 2~40P	Contact Plating	INSULATOR MATERIAL:	PACKING
A0=0.8u"	Full Of Gold	B:PA6T	A:PE Bag
A1=1u"	Semi-gold	C:PA9T	B:Tape & Reel
A2=1.5u"	B0=0.8U"	D:LCP	C:Tube
A3=2u"	B1=1U"		D:Tube+CAP
A4=3u"	B2=1.5U"		E:Tray
A5=5u"	B3=2U"		
A6=10u"	B4=3U"		
A7=15u"	B5=5U"		
A8=20u"	B6=10U"		
A9=30u"	B7=15U"		
	B8=20U"		
	B9=30U"		
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		

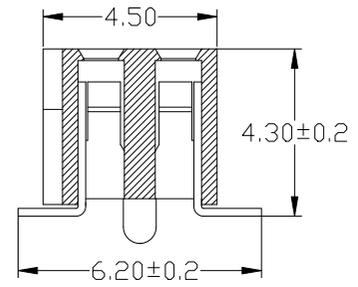

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit		上海高霖电子有限公司		
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F240-12XXXXXMUX3	
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.00mm 双排母 塑高4.0 SMT 带内柱 带凸点 U型	
					Angle	±3°	PROJ.	☉	APPROVE		Customer No.		
					DIM	TOL							

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperature Range: -40°C to +105°C

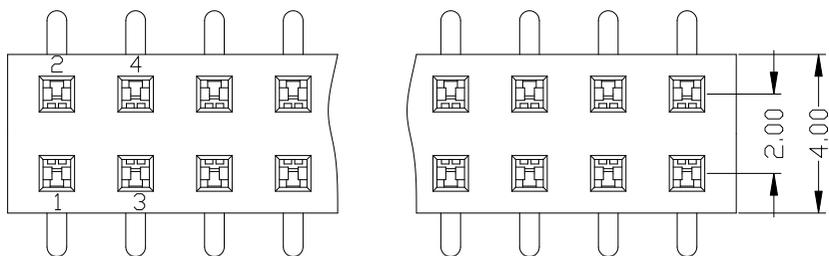

Ordering Information

F243-12 XX XX X MQ A X

NO. OF PINS PER ROW 2~40P	Contact Plating	INSULATOR MATERIAL:	PACKING
A0=0.8u"	Full Of Gold	B: PA6T	A: PE Bag
A1=1u"	Semi-gold	C: PA9T	B: Tape & Reel
A2=1.5u"	B0=0.8U"	D: LCP	C: Tube
A3=2u"	B1=1U"		D: Tube+CAP
A4=3u"	B2=1.5U"		E: Tray
A5=5u"	B3=2U"		
A6=10u"	B4=3U"		
A7=15u"	B5=5U"		
A8=20u"	B6=10U"		
A9=30u"	B7=15U"		
	B8=20U"		
	B9=30U"		
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		

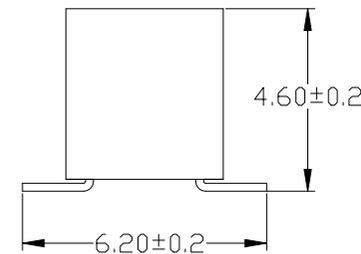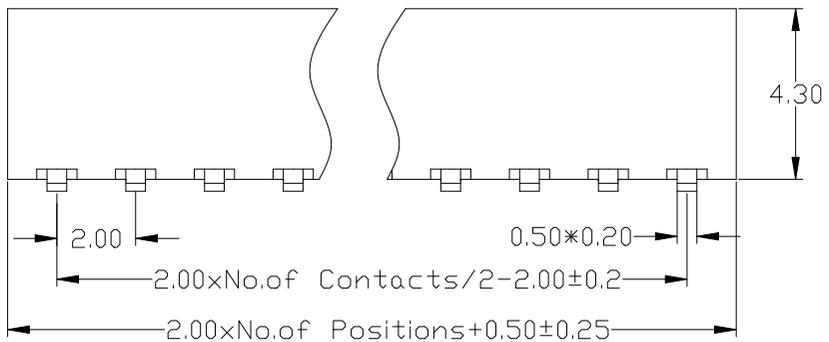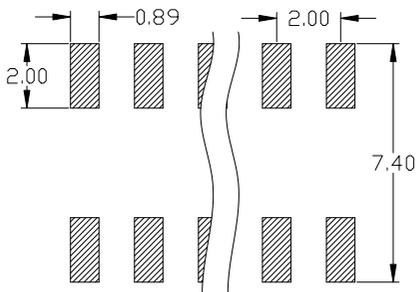

				OPERATION		SCALE		Fit		上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F243-12XXXXXXMQX1		
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.00mm 双排母 塑高4.3 SMT 四面包		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.			
					DIM	TOL							

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.






温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

F243-12 XX XX X MU A X

NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	PACKING
2~40P	Full Of Gold	Semi-gold	A: PE Bag
	A0=0.8u"	B0=0.8U"	B: Tape & Reel
	A1=1u"	B1=1U"	C: Tube
	A2=1.5u"	B2=1.5U"	D: Tube+CAP
	A3=2u"	B3=2U"	E: Tray
	A4=3u"	B4=3U"	
	A5=5u"	B5=5U"	
	A6=10u"	B6=10U"	
	A7=15u"	B7=15U"	
	A8=20u"	B8=20U"	
	A9=30u"	B9=30U"	
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		

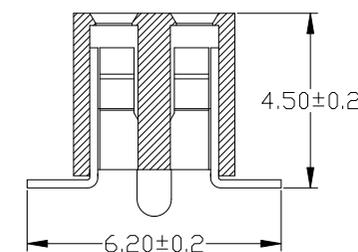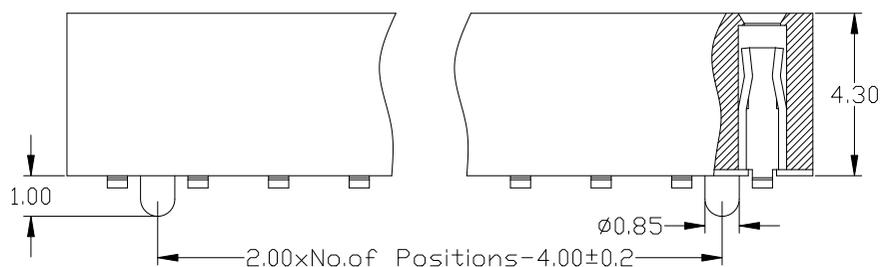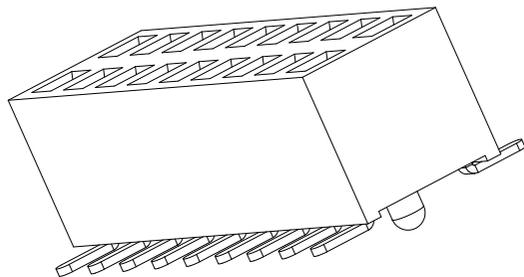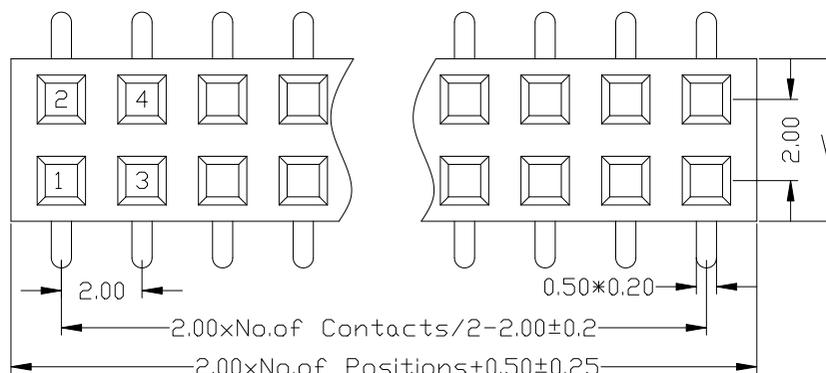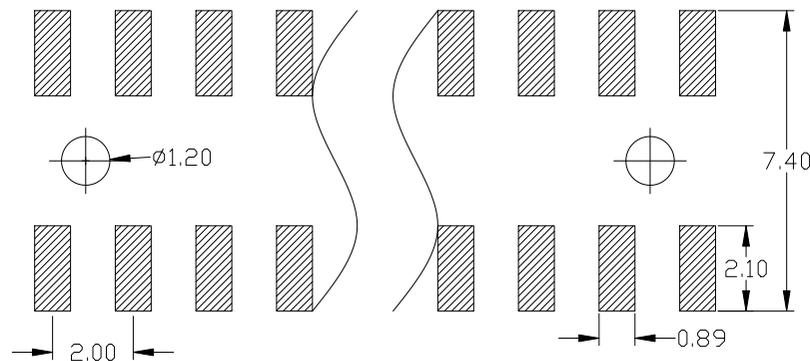

DIM"W"	4.0	4.5
--------	-----	-----

					OPERATION		SCALE		Fit		上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM					
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F243-12XXXXXXMUX2		
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.00mm 双排母 塑高4.3 SMT 带柱 U型		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.			

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.





温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

F243-12 XX XX X MU A X

NO. OF PINS PER ROW 2~40P	Contact Plating	INSULATOR MATERIAL:	PACKING
	Full Of Gold	B: PA6T	A: PE Bag
	Semi-gold	C: PA9T	B: Tape & Reel
	A0=0.8u"	D: LCP	C: Tube
	A1=1u"		D: Tube+CAP
	A2=1.5u"		E: Tray
	A3=2u"		
	A4=3u"		
	A5=5u"		
	A6=10u"		
	A7=15u"		
	A8=20u"		
	A9=30u"		
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		

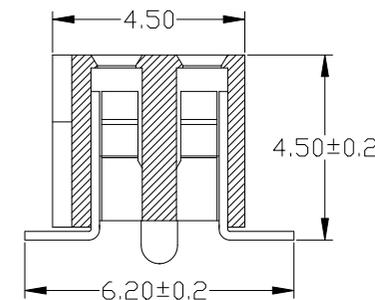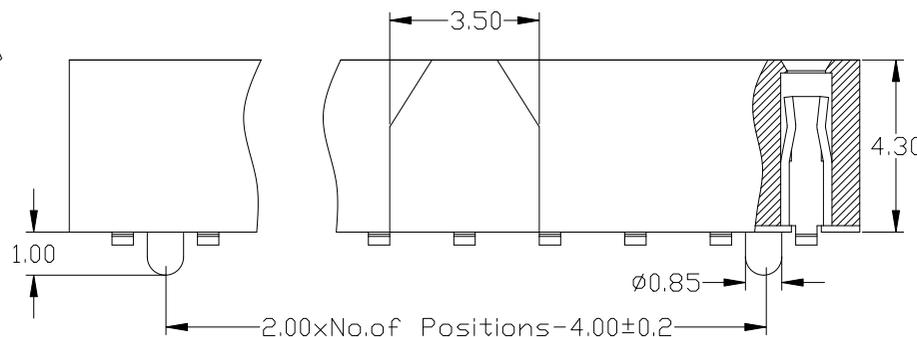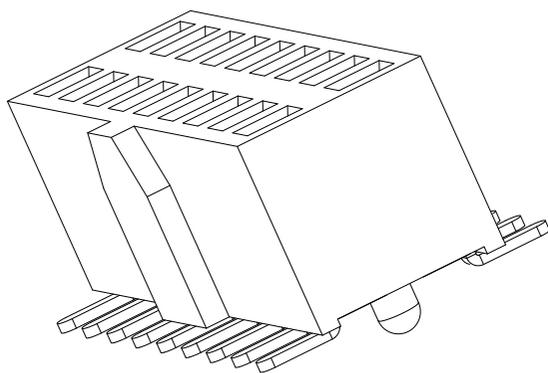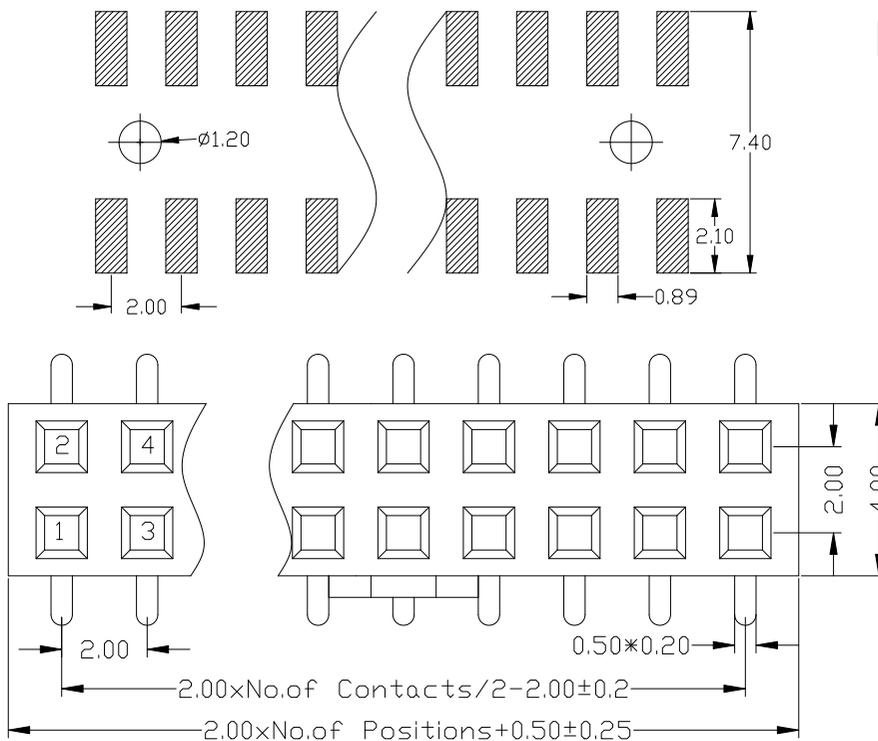

					OPERATION		SCALE		Fit		上海高霖电子有限公司		
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F243-12XXXXXXMUX3	
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.00mm 双排母 塑高4.3 SMT 带柱 带凸点 U型	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.		

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.


Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperature Range: -40°C to +105°C

Ordering Information

F245-12 XX XX X MP AX

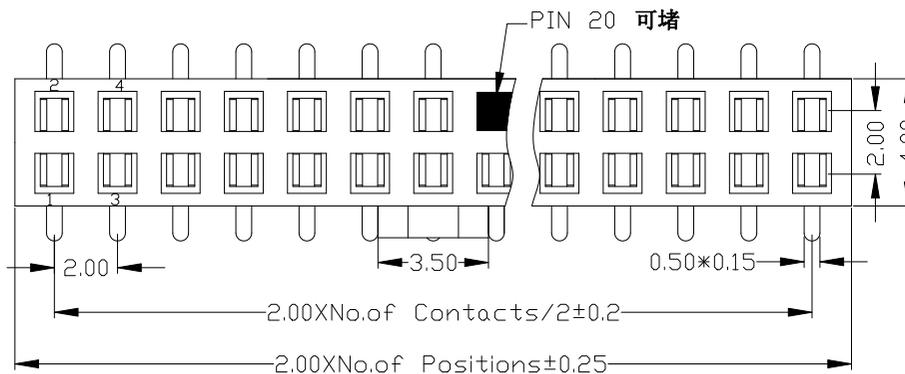

NO. OF PINS PER ROW 2~40P	Full Of Gold	Semi-gold	INSULATOR MATERIAL:	PACKING
A0=0.8u"	B0=0.8U"	B: PA6T	A: PE Bag	
A1=1u"	B1=1U"	C: PA9T	B: Tape & Reel	
A2=1.5u"	B2=1.5U"	D: LCP	C: Tube	
A3=2u"	B3=2U"		D: Tube+CAP	
A4=3u"	B4=3U"		E: Tray	
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				

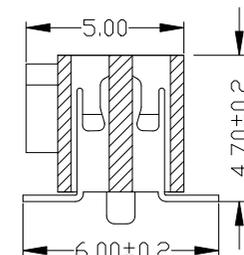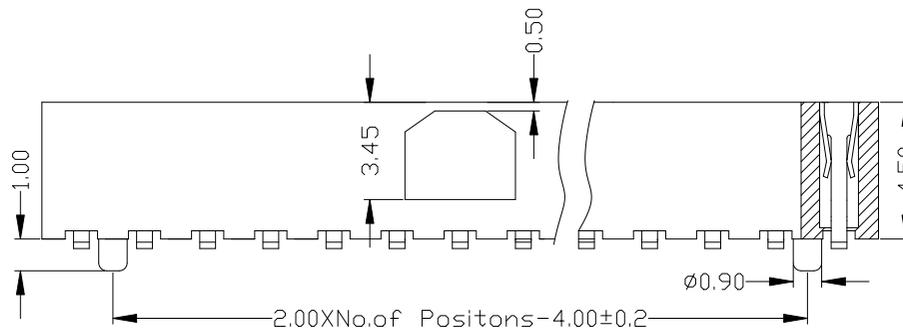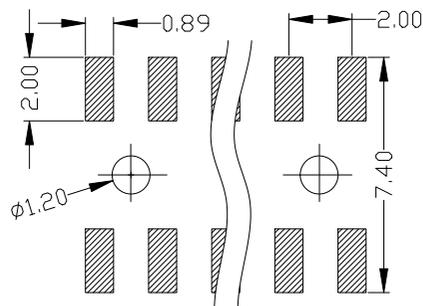

					OPERATION		SCALE		Fit		上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM					
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F245-12XXXXXMPX3		
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.00mm双排母 塑高4.5 SMT 带柱 上插式 带凸点 堵孔		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.			
						DIM	TOL							

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperature Range: -40°C to +105°C

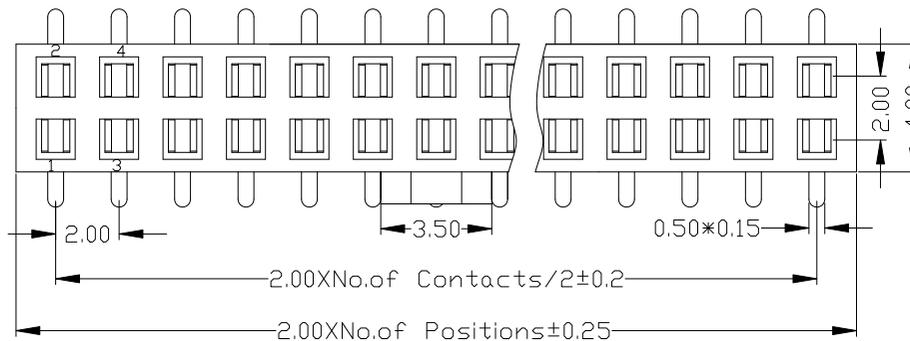

Ordering Information

F245-12 XX XX X MP AX

NO. OF PINS PER ROW 2~40P	Contact Plating	INSULATOR MATERIAL:	PACKING
A0=0.8u"	Full Of Gold	B:PA6T	A:PE Bag
A1=1u"	Semi-gold	C:PA9T	B:Tape & Reel
A2=1.5u"	B0=0.8U"	D:LCP	C:Tube
A3=2u"	B1=1U"		D:Tube+CAP
A4=3u"	B2=1.5U"		E:Tray
A5=5u"	B3=2U"		
A6=10u"	B4=3U"		
A7=15u"	B5=5U"		
A8=20u"	B6=10U"		
A9=30u"	B7=15U"		
	B8=20U"		
	B9=30U"		
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		

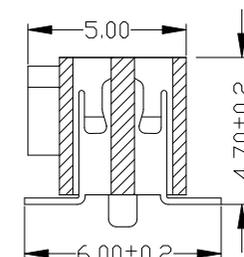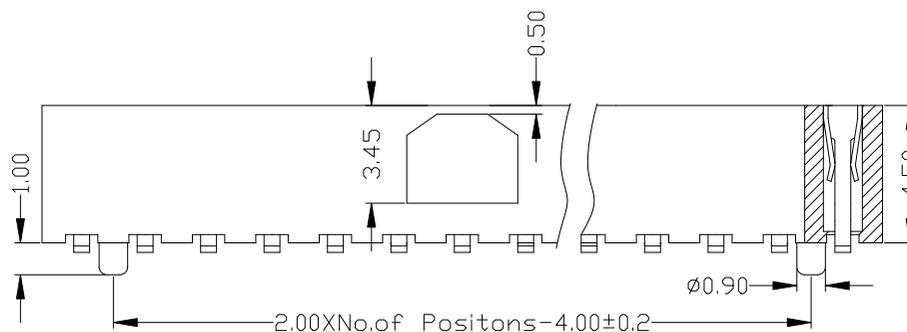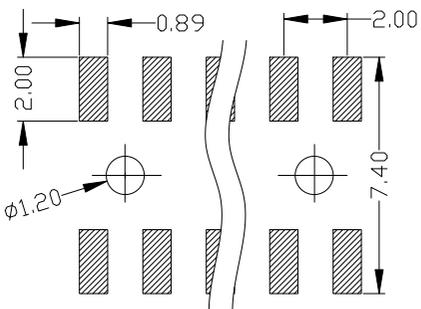

					OPERATION		SCALE		Fit		上海高霖电子有限公司		
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F245-12XXXXXMPX2	
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.00mm双排母 塑高4.5 SMT 带柱 上插式 带凸点	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.		
						DIM	TOL						

Specifications


备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA6T+30%G.F UL94V-0, Color: Black
 端子: 磷铜, 镍底30u"MIN, 表面镀金1u"MIN
 Contact: Phosphor, 1u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):




额定电流: 2 AMP
 Raring Current: 2 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to +105°C
 Temperature Range: -40°C to +105°C

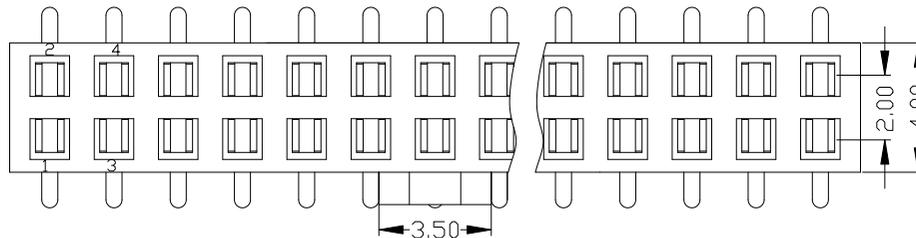

Ordering Information

F245-12 XX XX X MP A X

NO. OF PINS PER ROW	Full Of Gold	Semi-gold	INSULATOR MATERIAL:	PACKING
2~40P	A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	B: PA6T C: PA9T D: LCP	A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

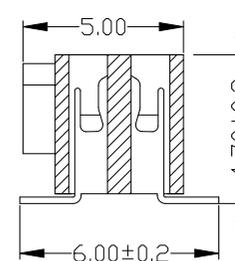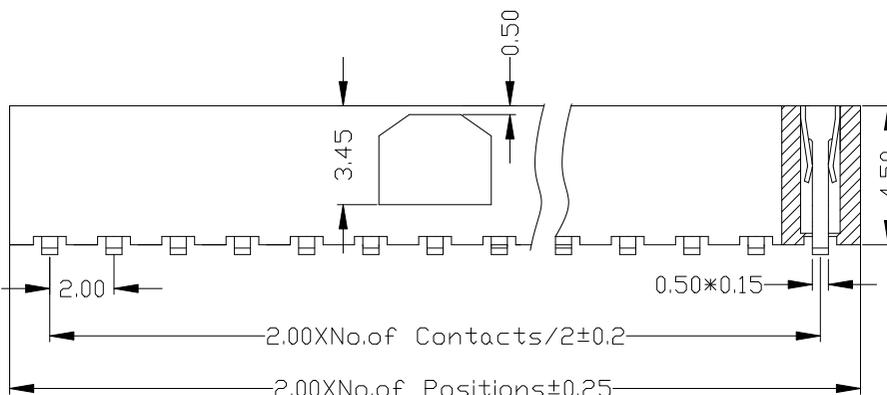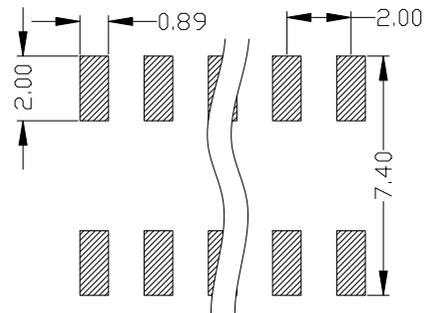

					OPERATION		SCALE		Fit		上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM					
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F245-12XXXXXMPX1		
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.00mm双排母 塑高4.5 SMT 上插式 带凸点		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.			
						DIM	TOL							

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.






Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

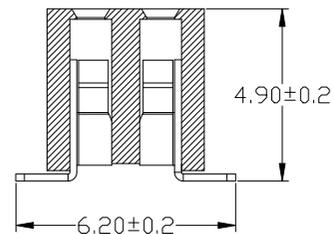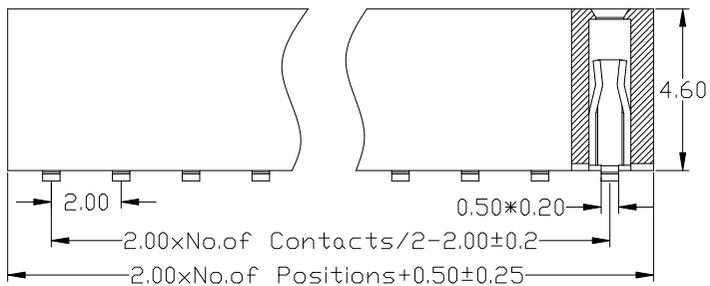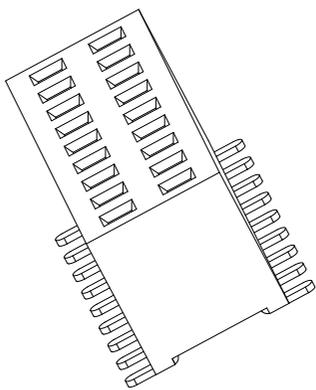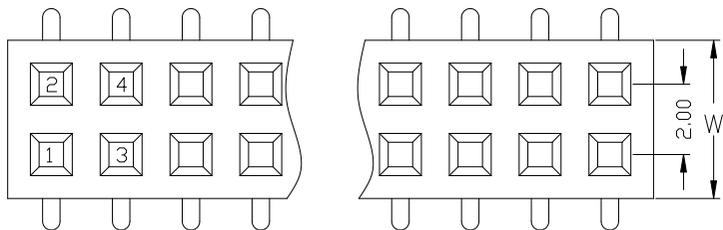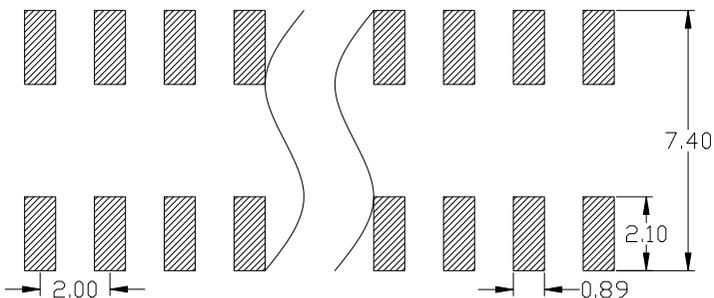

DIM"W" 4.0 4.5

Ordering Information

F246-12 XX XX X MU A X

NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	PACKING
2-40P	Full Of Gold	B: PA6T	A: PE Bag
	A0=0.8u"	C: PA9T	B: Tape & Reel
	A1=1u"	D: LCP	C: Tube
	A2=1.5u"		D: Tube+CAP
	A3=2u"		E: Tray
	A4=3u"		
	A5=5u"		
	A6=10u"		
	A7=15u"		
	A8=20u"		
	A9=30u"		
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	SCALE	Fit	上海高霖电子有限公司			
					X.X ±0.25	UNIT	MM				
					X.XX ±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F246-12XXXXXXMUX1
					X.XXX ±0.10	SHEET	1/1	CHECK		TITLE:	2.00mm 双排母 塑高4.6 SMT U型
					Angle ±3°	PROJ.	APPROVE			Customer No.	
					DIM TOL						

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

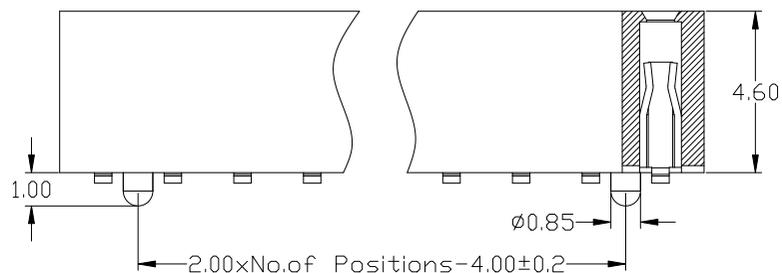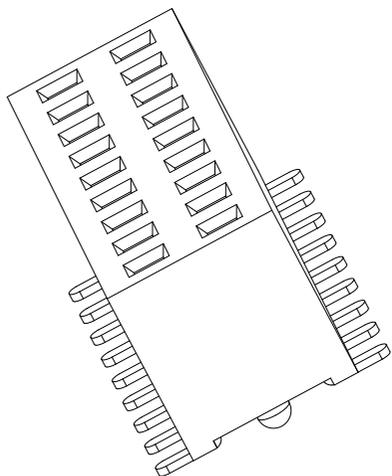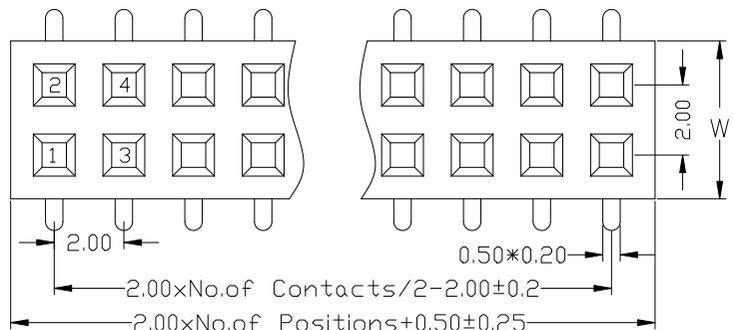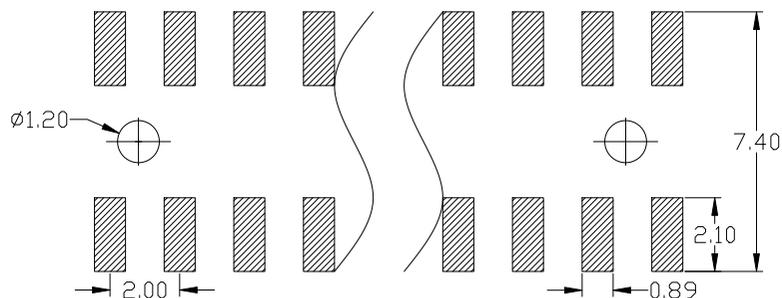

Ordering Information

F246-12 XX XX X MU A X

NO. OF PINS PER ROW 2~40P	Contact Plating		INSULATOR MATERIAL: B: PA6T C: PA9T D: LCP	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
	Full Of Gold	Semi-gold		
A0=0.8u"	B0=0.8U"			
A1=1u"	B1=1U"			
A2=1.5u"	B2=1.5U"			
A3=2u"	B3=2U"			
A4=3u"	B4=3U"			
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				

DIM"W" 4.0 4.5

				OPERATION		SCALE		Fit		上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F246-12XXXXXXMUX2		
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.00mm 双排母 塑高4.6 SMT 带柱 U型		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.			

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色

Housing: LCP+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

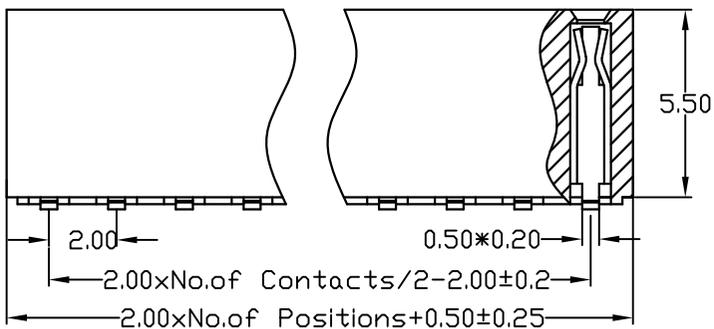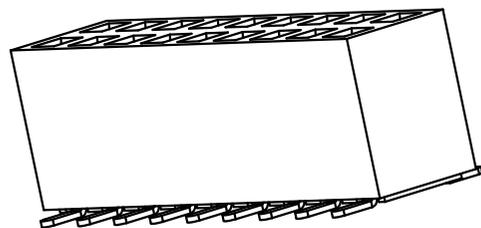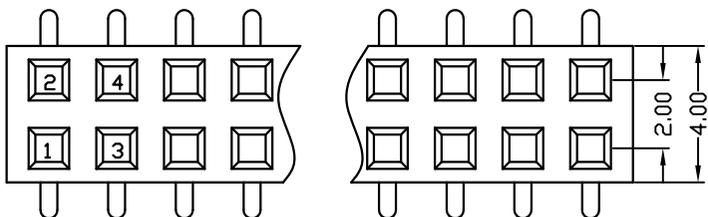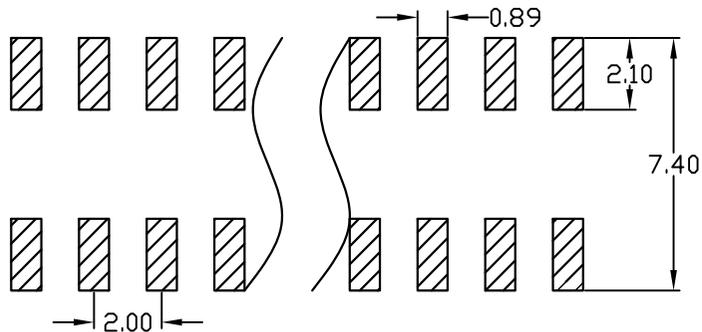

Ordering Information

F255-12 XX XX D MU

NO. OF PINS PER ROW 2~40P	Contact Plating Full Of Gold	Semi-gold	INSULATOR MATERIAL: D: LCP	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
A0=0.8u"	B0=0.8U"	B1=1U"		
A1=1u"	B2=1.5U"	B3=2U"		
A2=1.5u"	B4=3U"	B5=5U"		
A3=2u"	B6=10U"	B7=15U"		
A4=3u"	B8=20U"	B9=30u"		
A5=5u"	S1=Ordinary Tin Plated			
A6=10u"	S2=Matte Tin Plated			
A7=15u"	S3=Tin-plated High-temperature			
A8=20u"				
A9=30u"				

上海高霖电子有限公司

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	SCALE	Fit	上海高霖电子有限公司		
					X.X ±0.25	UNIT	MM			
					X.XX ±0.20	SIZE	A4	DESIGN	卢小强	PART NO. F255-12XXXXMUX1
					X.XXX ±0.10	SHEET	1/1	CHECK		TITLE: 2.00mm 双排母 塑高5.5 SMT
					Angle ±3°	PROJ.	APPROVE			Customer No.

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色

Housing: LCP+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

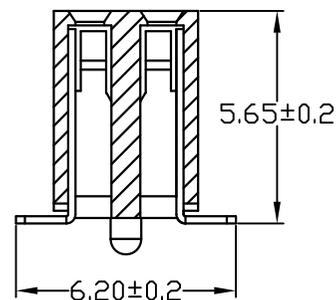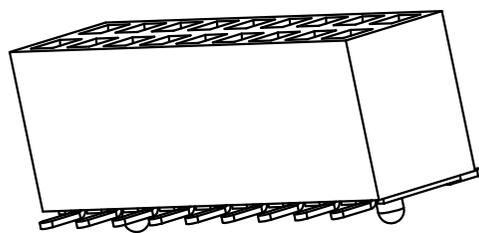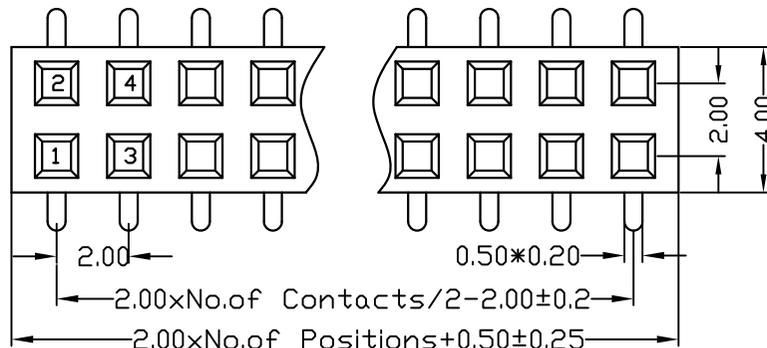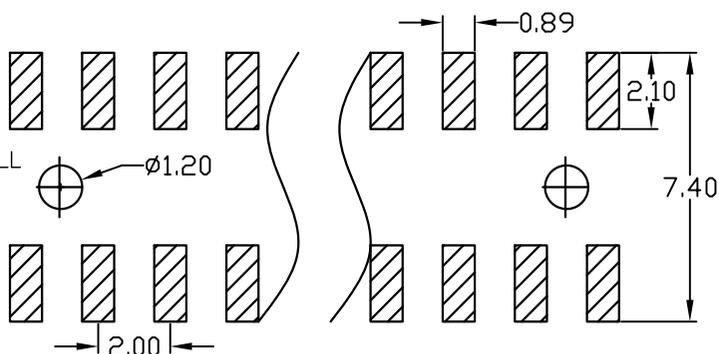

Ordering Information

F255-12 XX XX D MU

NO. OF PINS PER ROW 2~40P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	INSULATOR MATERIAL: D:LCP	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

上海高霖电子有限公司

				OPERATION		SCALE		Fit		上海高霖电子有限公司 卢小强 PART NO. F255-12XXXXMUX2 TITLE: 2.00mm 双排母 塑高5.5 SMT 带柱 U型 Customer No.		
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN				
				X.XXX	±0.10	SHEET	1/1	CHECK				
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE			