

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

F243-11 XX XX X WU

NO. OF PINS
PER ROW
1~40P







Contact Plating
Full Of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

Semi-gold
B0=0.8U"
B1=1U"
B2=1.5U"
B3=2U"
B4=3U"
B5=5U"
B6=10U"
B7=15U"
B8=20U"
B9=30U"

INSULATOR
MATERIAL:
B: PA6T
C: PA9T
D: LCP

PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

TYPE1:1
TYPE2:2

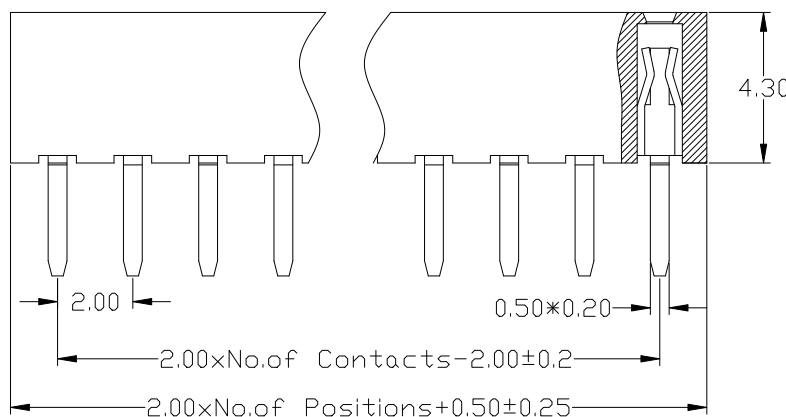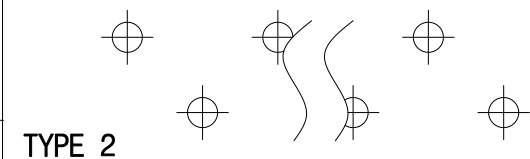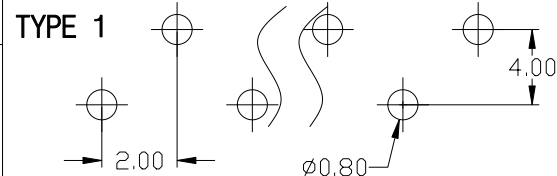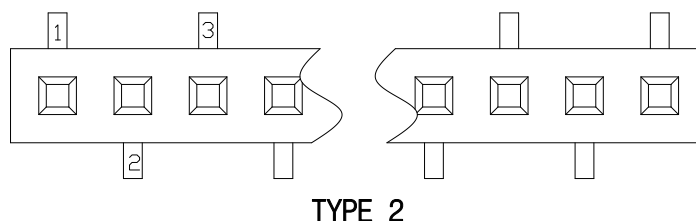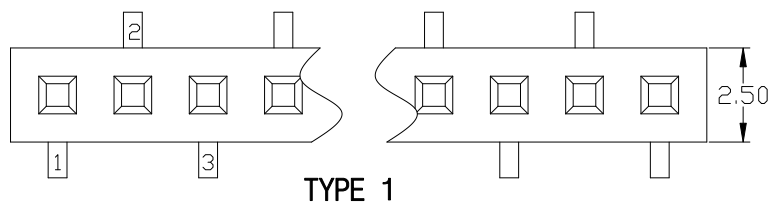

TYPE	PART NO.
TYPE 1	F243-11XXXXXXWUX1
TYPE 2	F243-11XXXXXXWUX2

				OPERATION		SCALE		Fit	上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F243-11XXXXXXWUXX	
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.00mm 单排母 蜈蚣脚 塑高4.3	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.	U型	

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

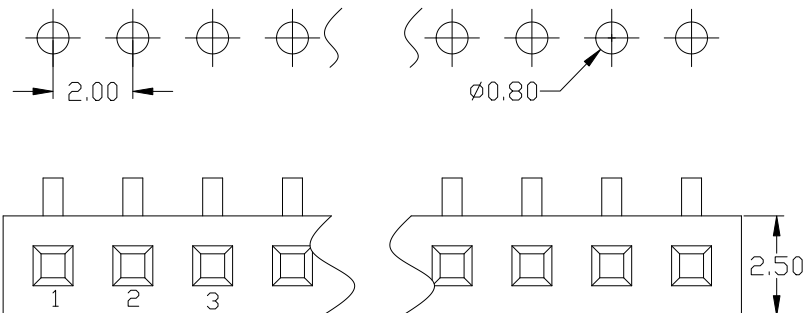

Ordering Information

F243-11 XX XX X WU AX

NO. OF PINS
PER ROW
1~50P

Contact Plating
Full Of Gold
A0=0.8u"

Semi-gold
B0=0.8U"

INSULATOR MATERIAL:
B: PA6T
C: PA9T
D: LCP

PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

A1=1u"

B1=1U"

A2=1.5u"

B2=1.5U"

A3=2u"

B3=2U"

A4=3u"

B4=3U"

A5=5u"

B5=5U"

A6=10u"

B6=10U"

A7=15u"

B7=15U"

A8=20u"

B8=20U"




A9=30u"

B9=30U"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

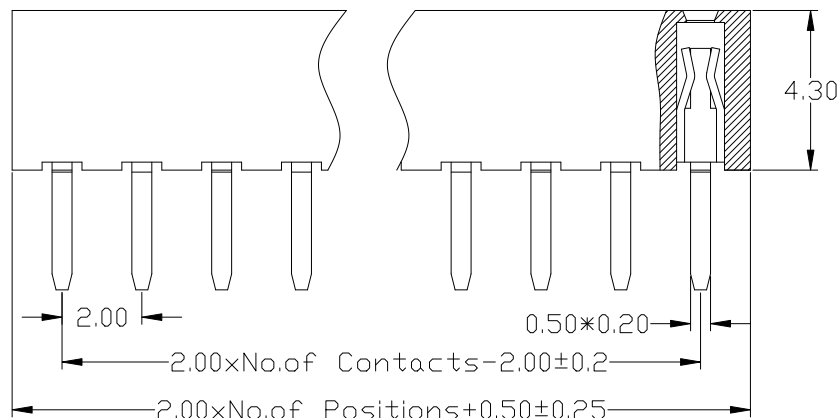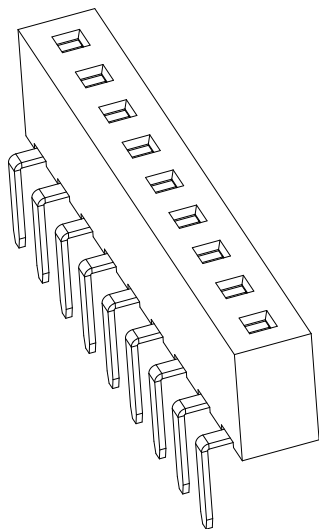

						OPERATION		SCALE		Fit	上海高霖电子有限公司			
						X.X	±0.25	UNIT		MM				
						X.XX	±0.20	SIZE	A4	DESIGN	卢小强		PART NO.	P243-11XXXXXWUX3
						X.XXX	±0.10	SHEET	1/1	CHECK			TITLE:	2.00mm 单排蜈蚣脚 塑高4.3 U型
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE			Customer No.	