

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C


Temperture Range: -40°C to+105°C

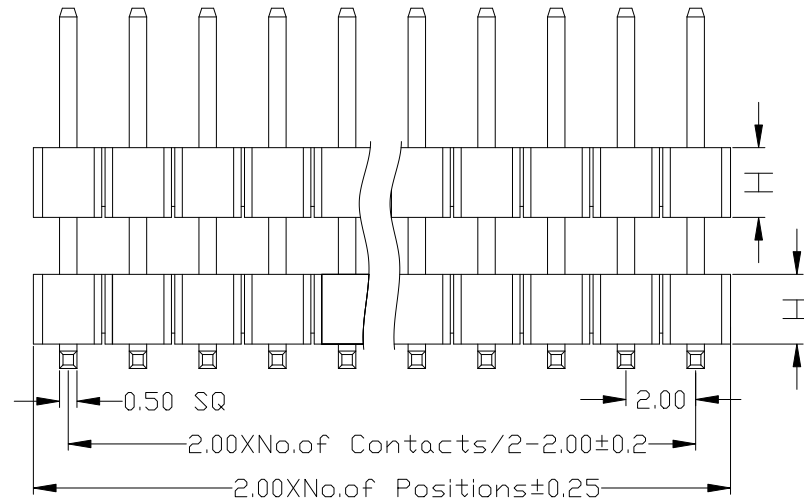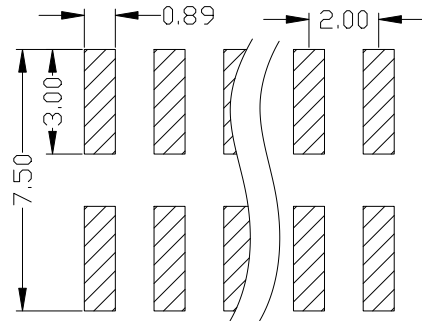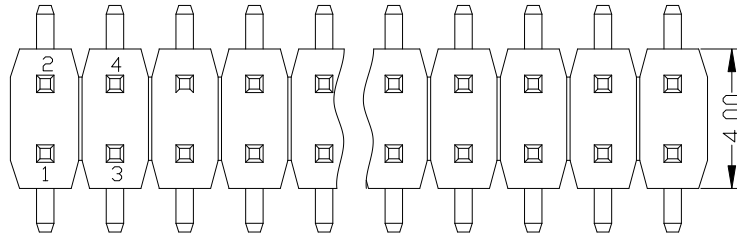

Ordering Information

P2XX-22 XX XX X M XXX

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
10:1.0mm	2~40P	Full Of Gold	B:PA6T		A:PE Bag
15:1.5mm		Semi-gold	C:PA9T		B:Tape & Reel
20:2.0mm			D:LCP		C:Tube
					D:Tube+CAP
					E:Tray

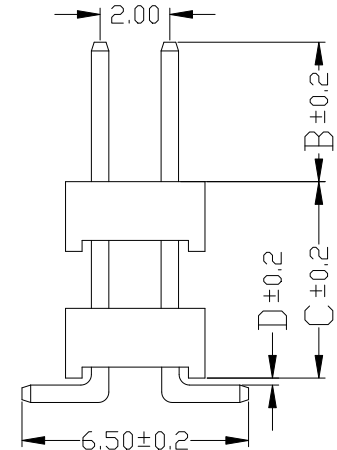

Dimension antitheses list

ITEM	B	H	D	C
Standard	2.8	4.0	1.0	1.5
Alternate				

上海高霖电子有限公司

卢小强

PART NO.

P2XX-22XXXXXXMXXXX1

TITLE:

2.0mm 双排针 双塑 SMT

Customer No.

		OPERATION		SCALE		Fit	
		X.X	±0.25	UNIT		MM	
		X.XX	±0.20	SIZE		A4	
		X.XXX	±0.10	SHEET		1/1	
		Angle	±3°	DESIGN		CHECK	
		DIM	TOL	PROJ.		APPROVE	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE					
-----	------	--------------------------	--------	---------	--	--	--	--	--

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperture Range: -40°C to +105°C

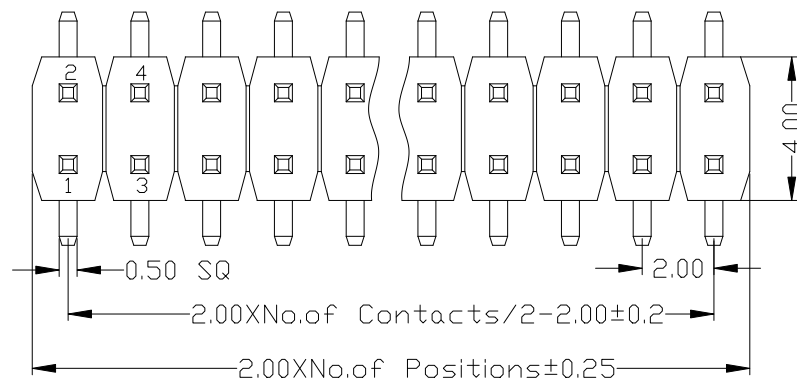


Ordering Information

P2XX-22 XX XX X M XXX

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
10:1.0mm 15:1.5mm 20:2.0mm	2~40P	Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	B:PA6T C:PA9T D:LCP	A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

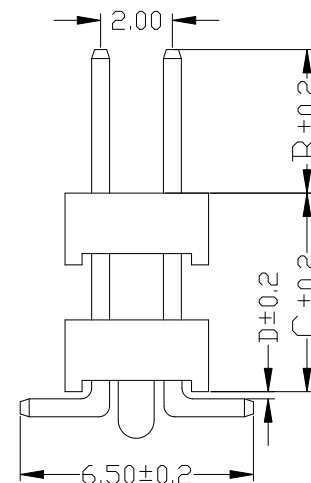

Dimension antitheses list							
ITEM	B		H		D		C
Standard	2.8	4.0	1.0	1.5	2.0	0	0.75
Alternate							

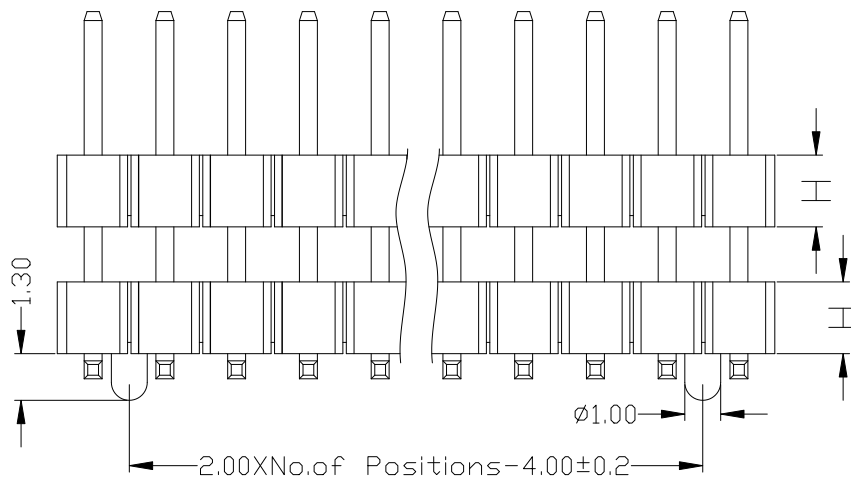

						OPERATION		SCALE		Fit	上海高霖电子有限公司			
						X.X	±0.25	UNIT		MM				
						X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P2XX-22XXXXXXMXXXX2	
						X.XXX	±0.10							
						Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.0mm 双排针 双塑 SMT 带柱	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE	Customer No.		

上海高霖电子有限公司

卢小强

PART NO.

P2XX-22XXXXXXMXXXX2

TITLE:

2.0mm 双排针 双塑 SMT 带柱

Customer No.

A

B

C

D



E

F

G

H

Temperture Range: -40°C to+105°C

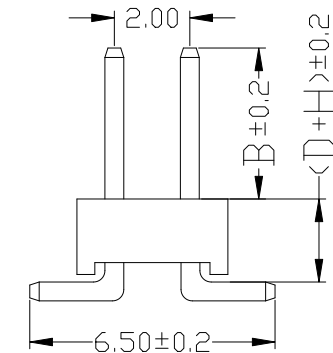

					OPERATION		SCALE		Fit	上海高霖电子有限公司		
					X.X	±0.25	UNIT		MM			
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P2XX-12XXXXXXMXXX1
					X.XXX	±0.10						
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.0mm 双排针 SMT
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	

P2XX-12 XX XX X M XX|X

上海高霖电子有限公司

卢小强

PART NO.

P2XX-12XXXXXMXXXX1

TITLE:

2.0mm 双排针 SMT

Customer No.	
--------------	--

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

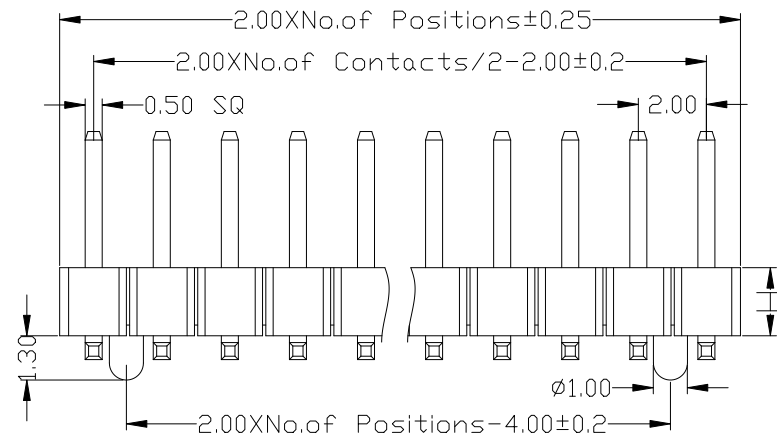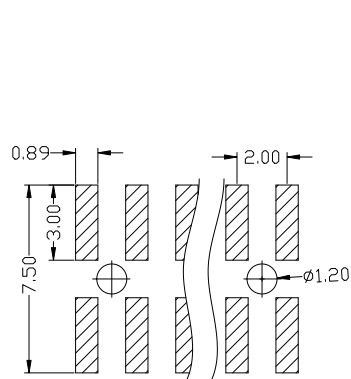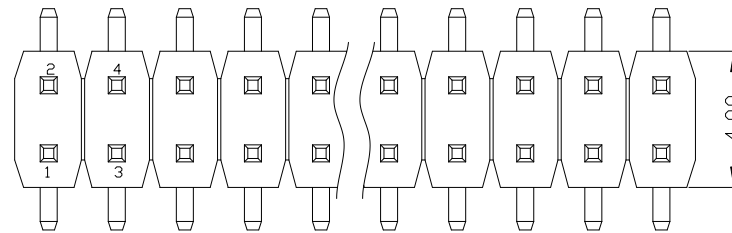

Ordering Information

P2XX-12 XX XX X M XXXX

HEIGHT OF
HOUSING
10:1.0mm
15:1.5mm
20:2.0mm

NO.OF PINS
PER ROW
2~40P


Contact Plating
Full Of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

Semi-gold
B0=0.8U"
B1=1U"
B2=1.5U"
B3=2U"
B4=3U"
B5=5U"
B6=10U"
B7=15U"
B8=20U"
B9=30U"

INSULATOR
MATERIAL:
B:PA6T
C:PA9T
D:LCP

LENGTH
OF
TERMINAL

PACKING
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

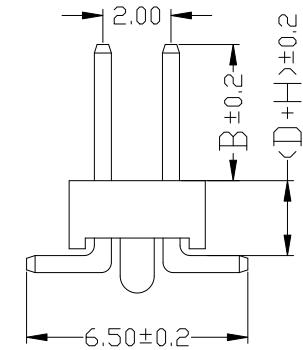

Dimension antitheses list

ITEM	B	H	D
Standard	4.0	1.0	1.5
Alternate	2.0	0	0.75

上海高霖电子有限公司

卢小强

PART NO.

P2XX-12XXXXXXMXXXX2

TITLE:

2.0mm 双排针 SMT 带柱

Customer No.

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

1/1

APPROVE

DESIGN

CHECK

APPROVE

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.
-----	------	--------------------------	--------	---------	-----	-----	-------	---------	--------------

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C


Temperture Range: -40°C to+105°C

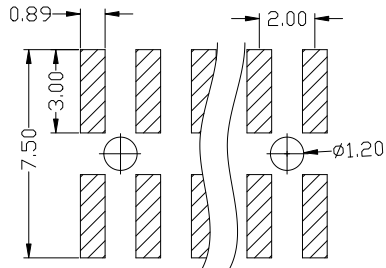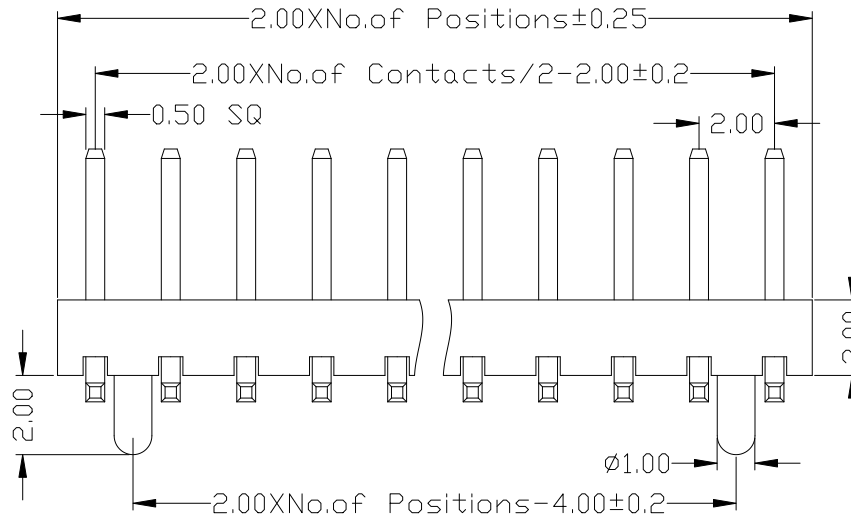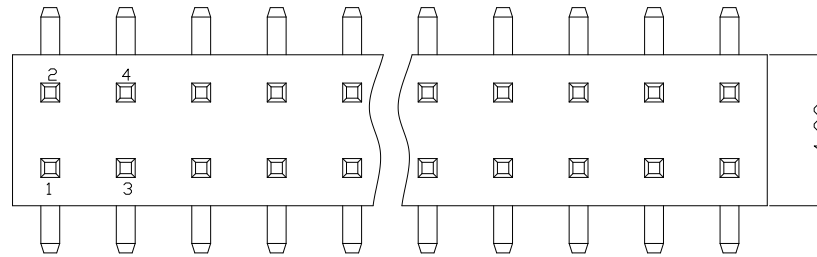

Ordering Information

P220-12 XX XX X M XXX

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
20:2.0mm	2~40P	Full Of Gold	Semi-gold		A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
		A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8u" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	B:PA6T C:PA9T D:LCP	
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

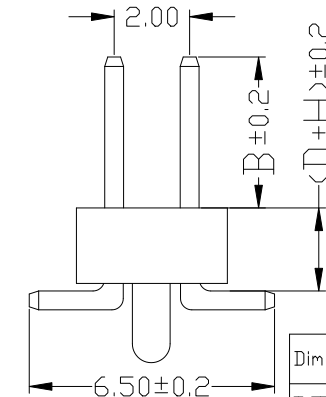

Dimension antitheses list			
ITEM	B	D	
Standard	4.0	0	0.75
Alternate			

					OPERATION		SCALE		Fit	上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P220-12XXXXXXMXXXX2	
					X.XXX	±0.10							
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.0mm双排针 塑高2.0 SMT带柱 不带预断	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE	Customer No.		

卢小强

PART NO.

P220-12XXXXXXMXXXX2

TITLE:

2.0mm双排针 塑高2.0 SMT带柱 不带预断

Customer No.

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.





温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

Ordering Information

P220-12 XX XX X M XXX

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
20:2.0mm	2~40P	Full Of Gold	B:PA6T		A:PE Bag
		A0=0.8u"	D:LCP		B:Tape & Reel
		A1=1u"			C:Tube
		A2=1.5u"			D:Tube+CAP
		A3=2u"			E:Tray
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

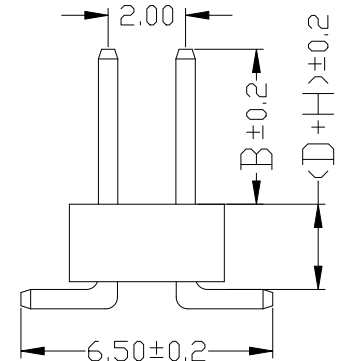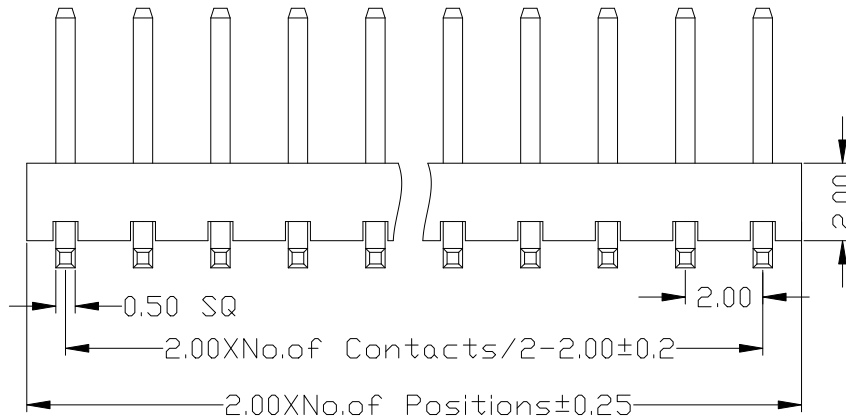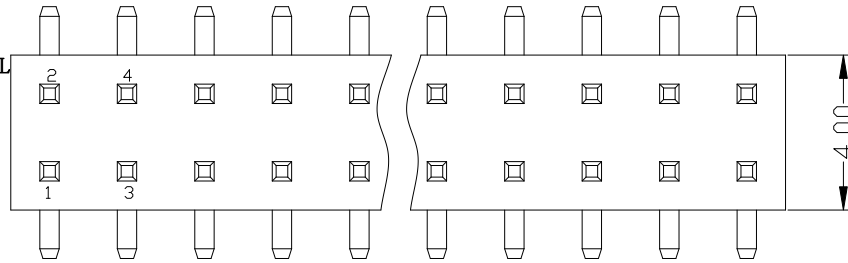

Dimension antitheses list			
ITEM	B	D	
Standard	4.0	0	0.75
Alternate			

上海高霖电子有限公司

卢小强

PART NO.

P220-12XXXXXXMXXXX1

TITLE:

2.0mm双排针 塑高2.0 SMT 不带预断

Customer No.

REV		DATE		MODIFICATION DESCRIPTION		CHANGE		APPROVE	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	
1		2		3		4		5	

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperture Range: -40°C to +105°C

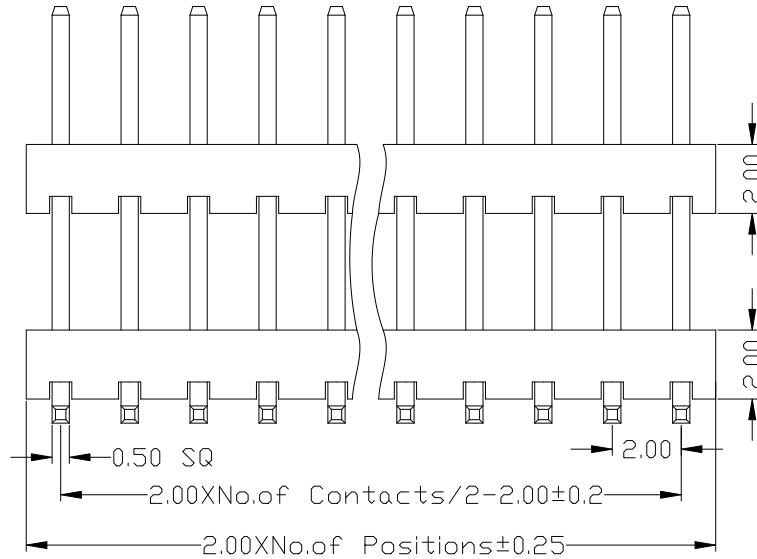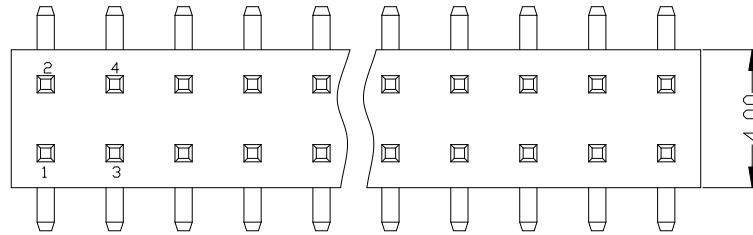

Ordering Information

P220-22 XX XX X M XXX

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
20:2.0mm	2~40P	Full Of Gold	B:PA6T		A:PE Bag
		A0=0.8u"	D:LCP		B:Tape & Reel
		A1=1u"			C:Tube
		A2=1.5u"			D:Tube+CAP
		A3=2u"			E:Tray
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			

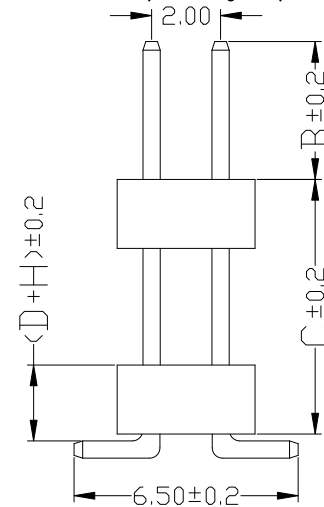

Dimension antitheses list			
ITEM	B	D	C
Standard	4.0	0	0.75
Alternate			

上海高霖电子有限公司

卢小强

PART NO.

P220-22XXXXXXMXXXX1

TITLE:

2.0mm双排针 塑高2.0 双塑 SMT 不带预断

Customer No.

REV		DATE		MODIFICATION DESCRIPTION		CHANGE		APPROVE		OPERATION		SCALE		Fit	
										X.X		UNIT		MM	
										X.XX		SIZE		A4	
										X.XXX		SHEET		1/1	
										Angle		PROJ.		CHECK	
										DIM		TOL		APPROVE	

A

B

C

D

E

F

G

H

1



					OPERATION		SCALE		Fit		上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM					
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P220—22XXXXXXMXXXX2		
					X.XXX	±0.10								
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.0mm双排针 塑高2.0 双塑 SMT带柱 不带预断		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.			