

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperture Range: -40°C to +105°C

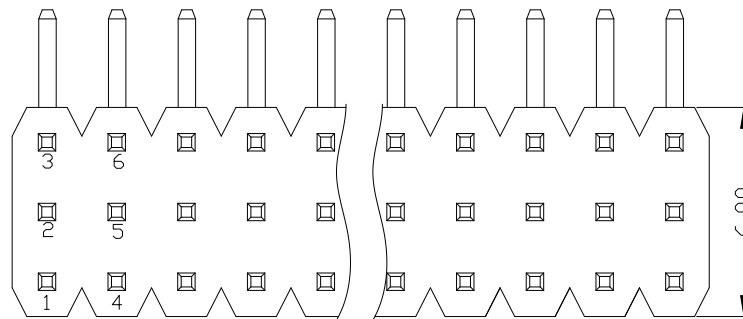



Ordering Information

P2XX-13 XX XX X R XXXX

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15: 1.5mm 20: 2.0mm	3~40P	Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	B: PA6T C: PA9T D: LCP	A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

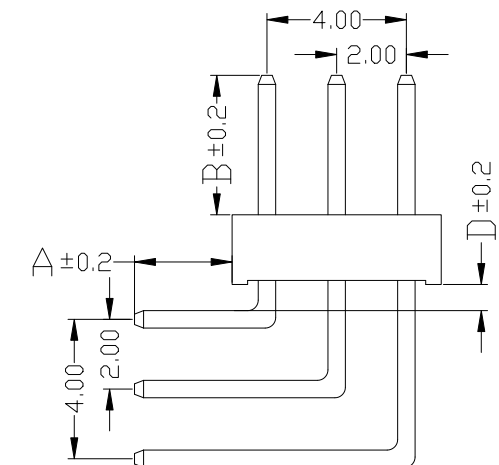

Dimension antitheses list					
ITEM	A	B	H	D	
Standard	2.8	4.0	1.5	2.0	0.75
Alternate					

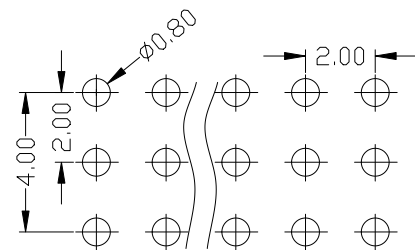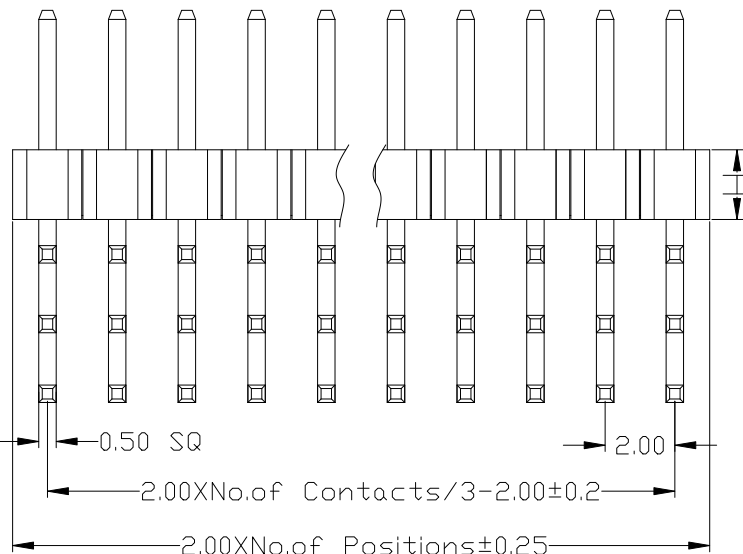

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

1/1

PROJ.

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

TITLE:

Customer No.

P2XX-13XXXXXXRXXXX1

2.0mm 排针 三排 90度

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.
-----	------	--------------------------	--------	---------	-----	-----	-------	---------	--------------

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

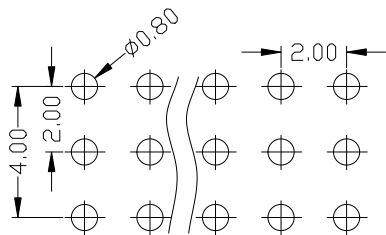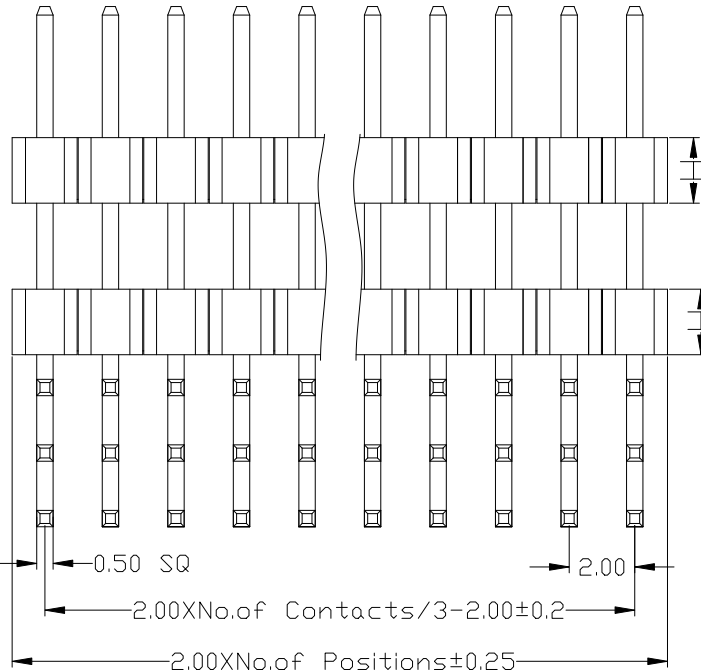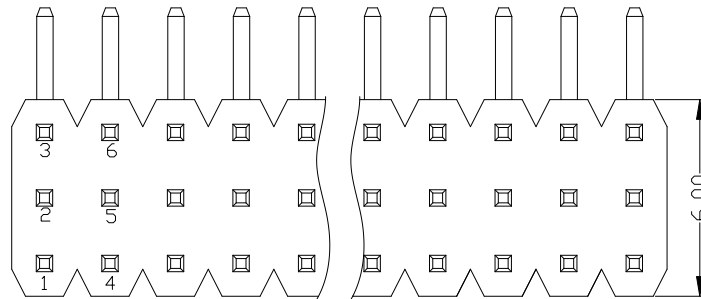

Ordering Information

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL	LENGTH OF TERMINAL	PACKING
15:1.5mm 20:2.0mm	3~40P	Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	B:PA6T C:PA9T D:LCP	A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray

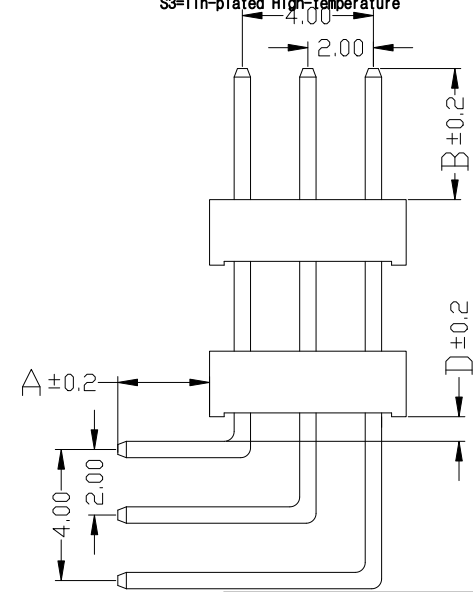

Dimension antitheses list					
ITEM	A	B	H	D	C
Standard	2.8	4.0	1.5	2.0	0.75
Alternate					

				OPERATION		SCALE		Fit	上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	P2XX-23XXXXXXRXXXX1	
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.0mm排针 三排 双塑 90度	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.		

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperture Range: -40°C to +105°C

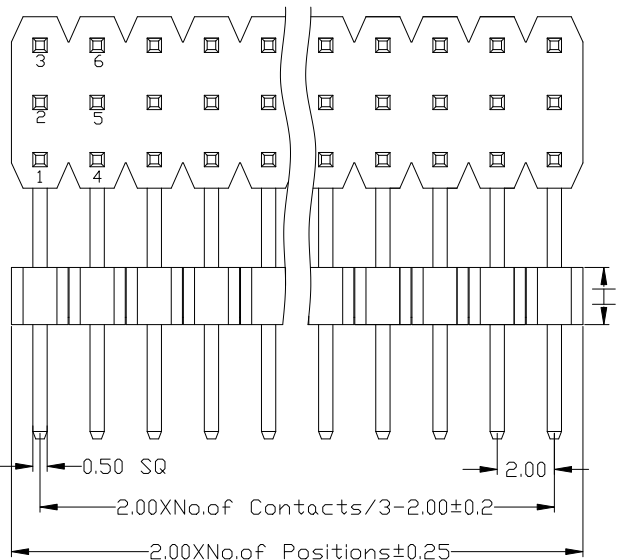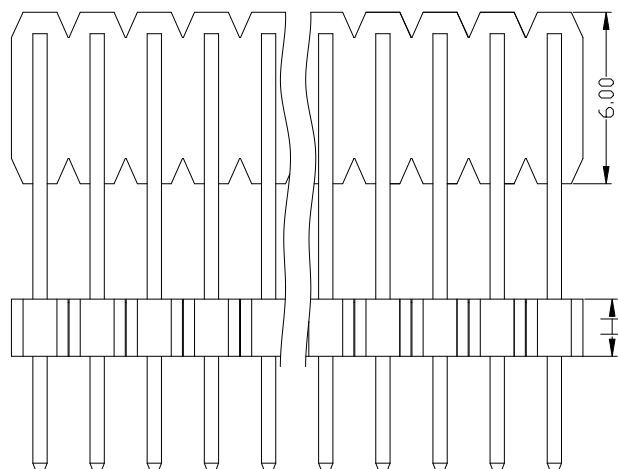

Ordering Information

P2XX-23 XX XX X R XXXX

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15:1.5mm 20:2.0mm	3~40P	Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	B:PA6T C:PA9T D:LCP	A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

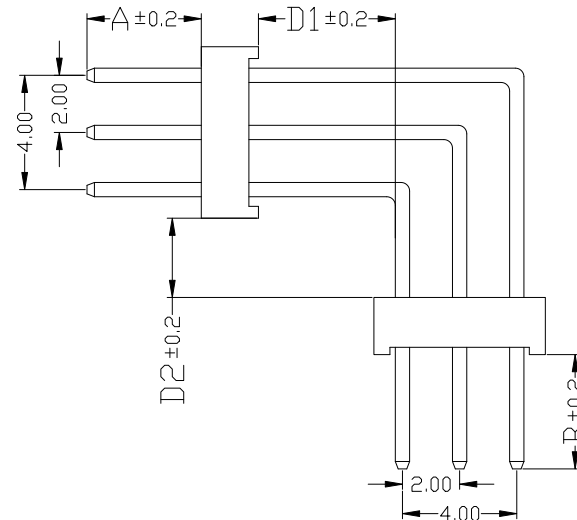

Dimension antitheses list					
ITEM	A	B	H	D	C
Standard	2.8	4.0	1.5	2.0	0.75
Alternate					

OPERATION

X.X	±0.25
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

SCALE

UNIT

Fit

MM

上海高霖电子有限公司

卢小强

PART NO.

P2XX-23XXXXXXRXXXX2

DESIGN

CHECK

APPROVE

TITLE:

Customer No.

2.0mm 排针 三排 双塑 90度

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperture Range: -40°C to +105°C

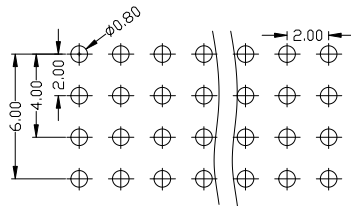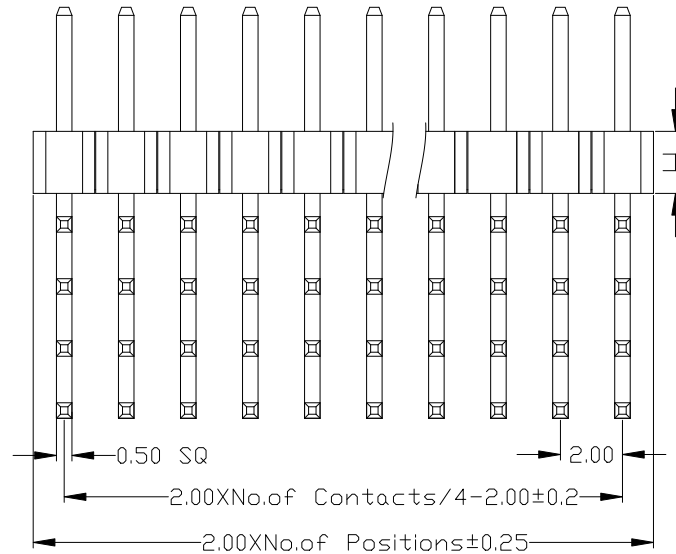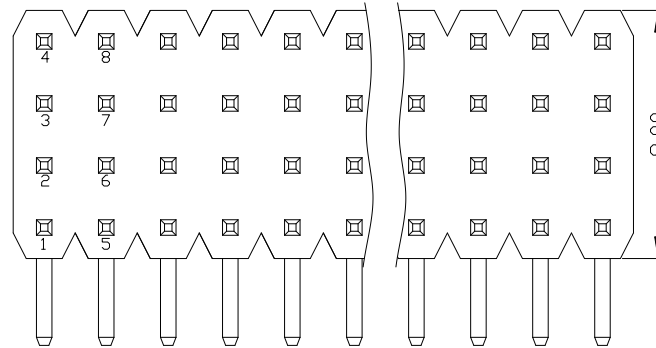

Ordering Information

P2XX-14 XX XX X R XXXX

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15: 1.5mm 20: 2.0mm	4~40P	Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	B: PA6T C: PA9T D: LCP	A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray

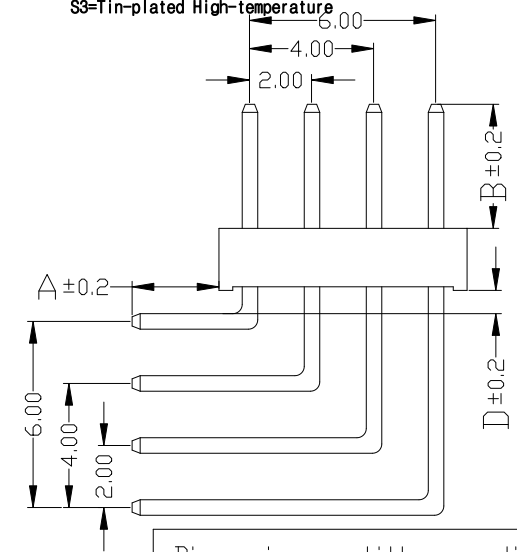

Dimension antitheses list					
ITEM	A	B	H	D	
Standard	2.8	4.0	1.5	2.0	0.75
Alternate					

				OPERATION		SCALE		Fit	上海高霖电子有限公司			
				X.X	±0.40	UNIT		MM				
				X.XX	±0.25	SIZE	A4	DESIGN	卢小强			
				X.XXX	±0.15	SHEET	1/1	CHECK				
				Angle	±3°	PROJ.		APPROVE	PART NO.			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL					

上海高霖电子有限公司

卢小强

PART NO.

P2XX-14XXXXXXRXXXX1

TITLE:

2.0mm 排针 四排 90度

Customer No.

A

B

C

D

F

F


G

H

• •

3

1

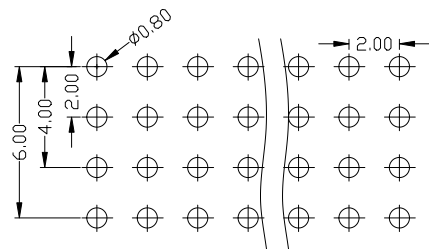~~2~~

H

Q



F

F

6

H

1

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperture Range: -40°C to +105°C

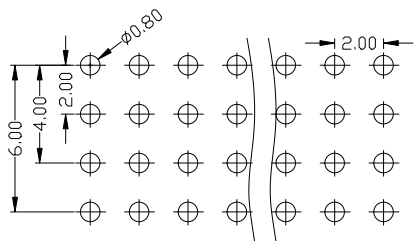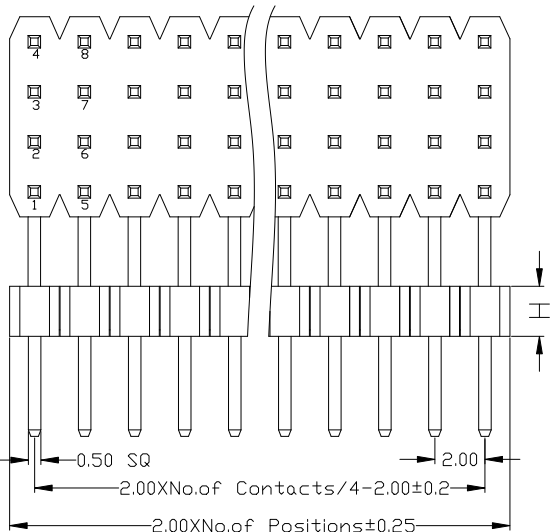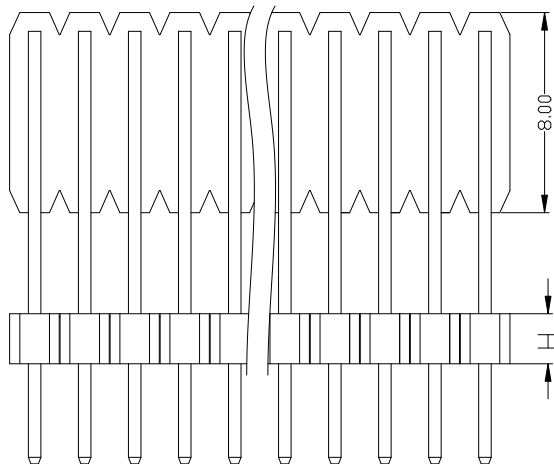

Ordering Information

P2XX-24 XX XX X R XXX

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
15: 1.5mm 20: 2.0mm	4~40P	Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8u" B1=1u" B2=1.5u" B3=2u" B4=3u" B5=5u" B6=10u" B7=15u" B8=20u" B9=30u"	B: PA6T C: PA9T D: LCP	A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

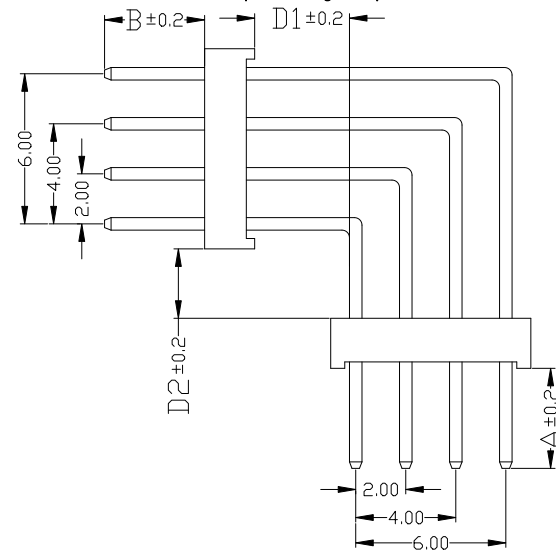

Dimension antitheses list

ITEM	A	B	H	D	C
Standard	2.8	4.0	1.5	2.0	0.75
Alternate					

OPERATION

X.X ±0.40

X.XX ±0.25

X.XXX ±0.15

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

CHECK

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

TITLE:

Customer No.

P2XX-24XXXXXXRXXXX2

2.0mm 排针 四排 双塑 90度

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.
-----	------	--------------------------	--------	---------	-----	-----	-------	---------	--------------