

B

2

Temperture Range: -40°C to+105°C

H

E

1

D

F

F

□

H

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: LCP+30%G. F UL94V-0, 颜色: 黑色.

Housing: LCP+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rated Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

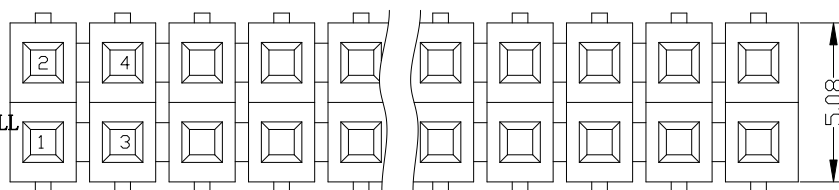

Ordering Information

F185-12 XX XX D WU A X

NO. OF PINS
PER ROW
2~40P

Contact Plating

Full Of Gold

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

INSULATOR

MATERIAL:

D: LCP

B1=1U"

B2=1.5U"

B3=2U"

B4=3U"

B5=5U"

B6=10U"

B7=15U"

B8=20U"

B9=30U"

PACKING




A: PE Bag

B: Tape & Reel

C: Tube

D: Tube+CAP

E: Tray

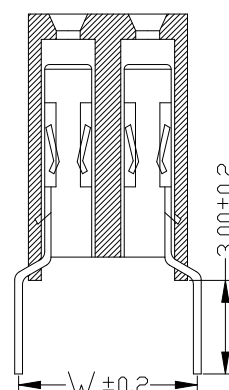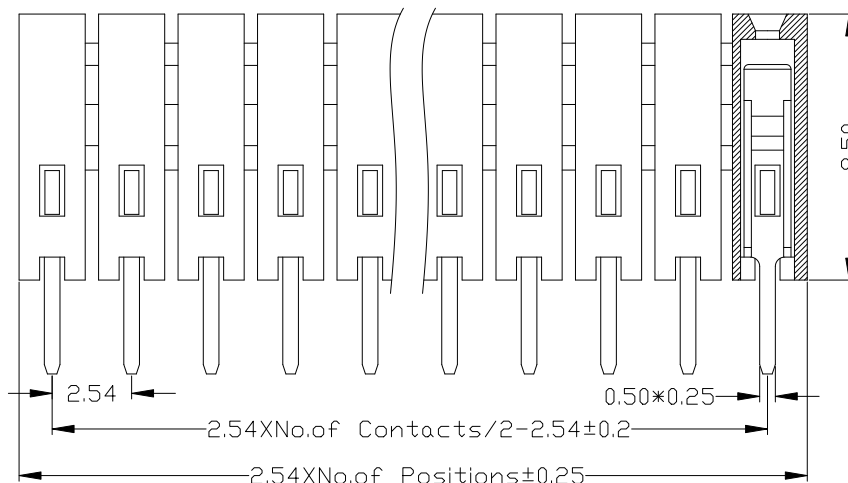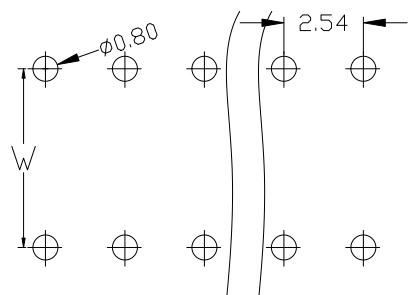

PART NO	W
F185-12XXXXDWUX1	5.71
F185-12XXXXDWUX2	6.50
F185-12XXXXDWUX3	7.62

				OPERATION		SCALE		Fit	上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F185-12XXXXDWUXX	
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54mm 双排母 塑高8.5 蜈蚣脚	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	PROJ.	PROJ.	APPROVE		Customer No.		
DIM	TOL											

上海高霖电子有限公司

卢小强

PART NO.

F185-12XXXXDWUXX

TITLE:

2.54mm 双排母 塑高8.5 蜈蚣脚

Customer No.