

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperature Range: -40°C to +105°C

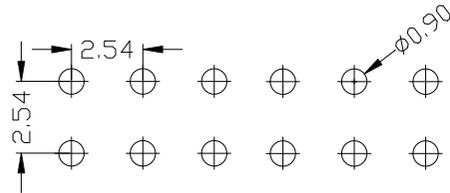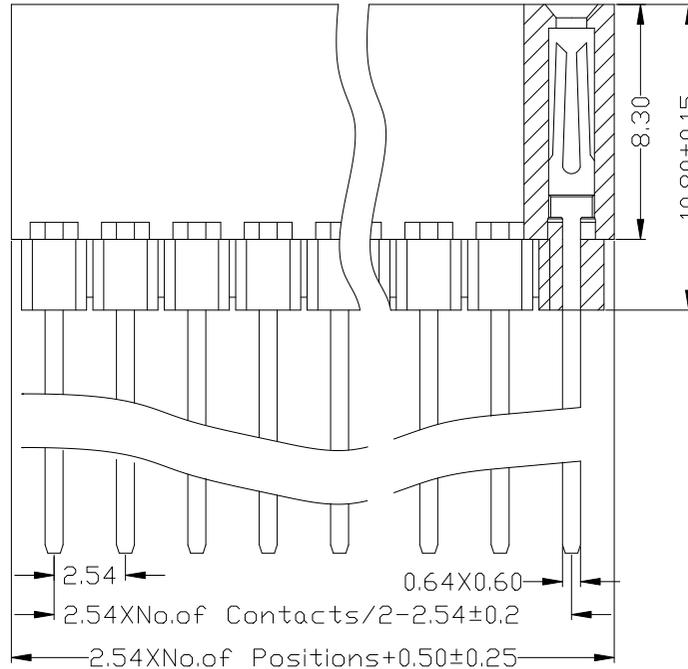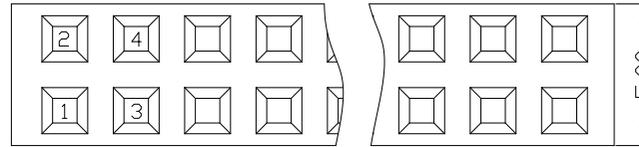

Ordering Information

F183-22 XX XX X SY AX

NO. OF PINS PER ROW 2~40P	Full Of Gold	Semi-gold	INSULATOR MATERIAL:	PACKING
A0=0.8u"	B0=0.8U"	A: PBT	A: PE Bag	
A1=1u"	B1=1U"	B: PA6T	B: Tape & Reel	
A2=1.5u"	B2=1.5U"	C: PA9T	C: Tube	
A3=2u"	B3=2U"	D: LCP	D: Tube+CAP	
A4=3u"	B4=3U"		E: Tray	
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				

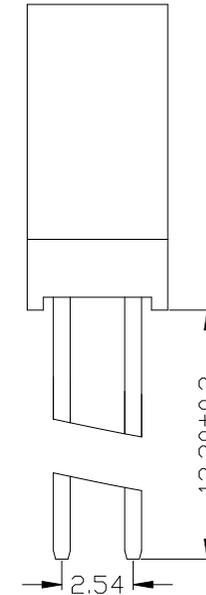

上海高霖电子有限公司

OPERATION

SCALE

Fit

X.X ±0.25

UNIT

MM

X.XX ±0.20

SIZE

A4

DESIGN

卢小强

PART NO.

F183-22XXXXXXSYX1

X.XXX ±0.10

SHEET

1/1

CHECK

TITLE:

2.54mm 双排母 塑高8.3 180度 Y型

Angle ±3°

DIM TOL

PROJ.

APPROVE

Customer No.

REV DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE

1

2

3

4

5

6

7

8

9

10

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.





温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information

F185-X2 XX XX X SY AX

Plastic Layers	NO. OF PINS PER ROW 2-40P	Contact Plating		INSULATOR PACKING MATERIAL:		
		Full Of Gold	Semi-gold	A: PBT	B: Tape & Reel	C: Tube
		A0=0.8u"	B0=0.8U"	B: PA6T	C: Tube	D: Tube+CAP
		A1=1u"	B1=1U"	C: PA9T	D: Tray	E: Tray
		A2=1.5u"	B2=1.5U"			
		A3=2u"	B3=2U"			
		A4=3u"	B4=3U"			
		A5=5u"	B5=5U"			
		A6=10u"	B6=10U"			
		A7=15u"	B7=15U"			
		A8=20u"	B8=20U"			
		A9=30u"	B9=30U"			
		S1=Ordinary Tin Plated				
		S2=Matte Tin Plated				
		S3=Tin-plated High-temperature				

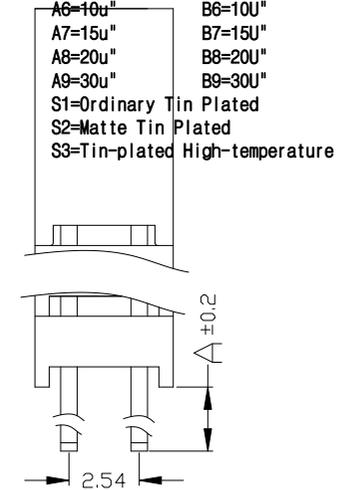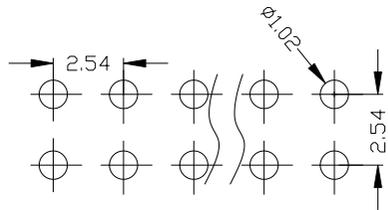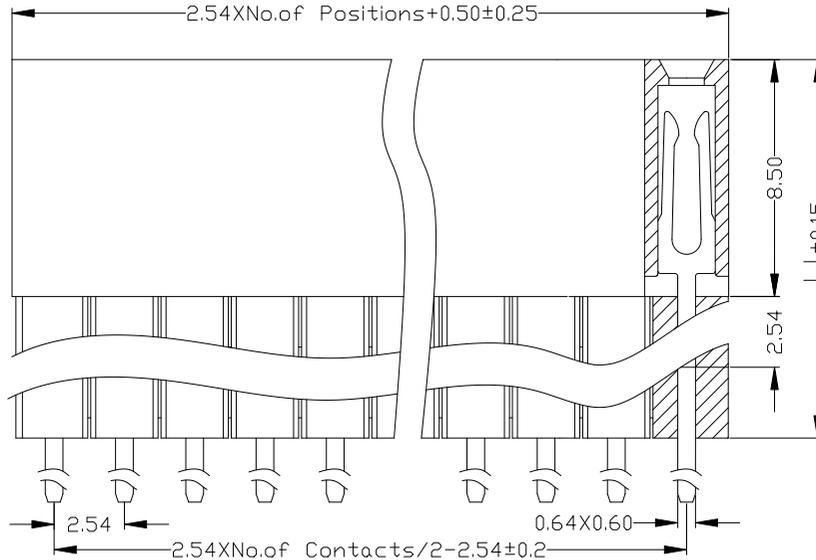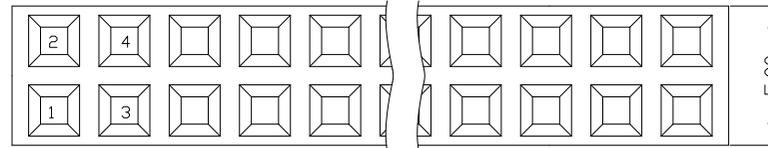

PART NO	DIM "H"	DIM "A"	
F185-22XXXXXXSYX1	11.05	2.30	7.35 12.20
F185-32XXXXXXSYX1	13.59	4.85	9.65
F185-42XXXXXXSYX1	16.31	2.30	7.10
F185-52XXXXXXSYX1	18.67		4.60

上海高霖电子有限公司

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit	上海高霖电子有限公司		
					DIM	TOL	UNIT	MM				
					X.X	±0.25	SIZE	A4	DESIGN	卢小强	PART NO.	F185-X2XXXXXXSYX1
					X.XX	±0.20	SHEET	1/1	CHECK		TITLE:	2.54mm 双排母 塑高8.5 180度 Y型
					X.XXX	±0.10	PROJ.	APPROVE		Customer No.		
					Angle	±3°						