
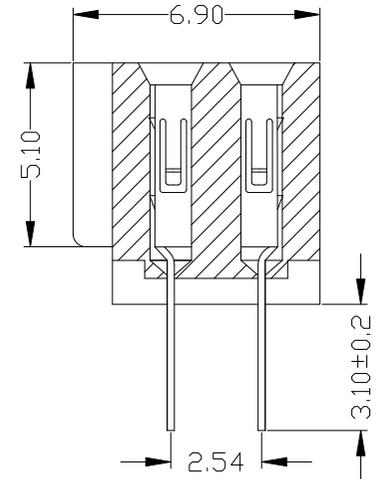
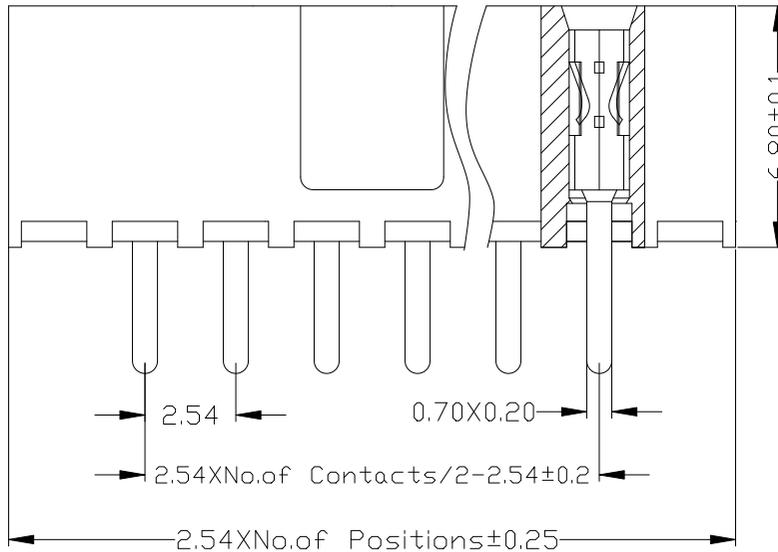
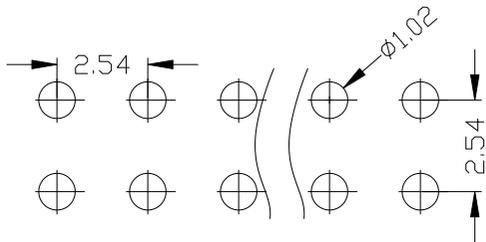


# Specifications

备注 (Remark)  
 1. 材料 (MATERIAL)  
 胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.  
 Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black  
 端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN  
 Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL  
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):  
 额定电流: 3 AMP  
 Rating Current: 3 AMP.  
 接触阻抗: 20 mΩ MAX.  
 Contact Resistance: 20 mΩ MAX.  
 绝缘阻抗: 1000 MΩ MIN.  
 Insulating Resistance: 1000 MΩ MIN.  
 耐电压: AC 500V.  
 Withstanding Voltage: AC 500V.  
 温度范围: -40°C to +105°C  
 Temperature Range: -40°C to +105°C

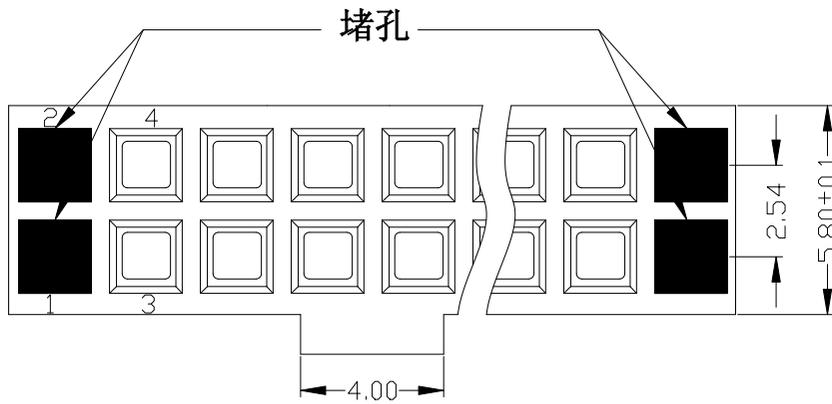

# Ordering Information

F168-12 XX XX X SP AX

NO. OF PINS PER ROW 2-40P	Contact Plating	INSULATOR MATERIAL:	PACKING
A0=0.8u"	Full Of Gold	A: PBT	A: PE Bag
A1=1u"	Semi-gold	B: PA6T	B: Tape & Reel
A2=1.5u"		C: PA9T	C: Tube
A3=2u"		D: LCP	D: Tube+CAP
A4=3u"			E: Tray
A5=5u"			
A6=10u"			
A7=15u"			
A8=20u"			
A9=30u"			
S1=Ordinary Tin Plated			
S2=Matte Tin Plated			
S3=Tin-plated High-temperature			




上海高霖电子有限公司

				OPERATION		SCALE		Fit		上海高霖电子有限公司	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F168-12XXXXXXSPX3
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54mm双排母 塑高6.8 180度 上插式 带凸点 堵孔
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.	
	1				DIM	TOL					

# Specifications

备注 (Remark)  
 1. 材料 (MATERIAL)  
 胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.  
 Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black  
 端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN  
 Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL  
 30u" MIN NICKEL UNDERPLATING OVER ALL


2. 特性 (characteristics):  
 额定电流: 3 AMP  
 Rating Current: 3 AMP.  
 接触阻抗: 20 mΩ MAX.  
 Contact Resistance: 20 mΩ MAX.  
 绝缘阻抗: 1000 MΩ MIN.  
 Insulating Resistance: 1000 MΩ MIN.  
 耐电压: AC 500V.  
 Withstanding Voltage: AC 500V.  
 温度范围: -40°C to +105°C  
 Temperature Range: -40°C to +105°C

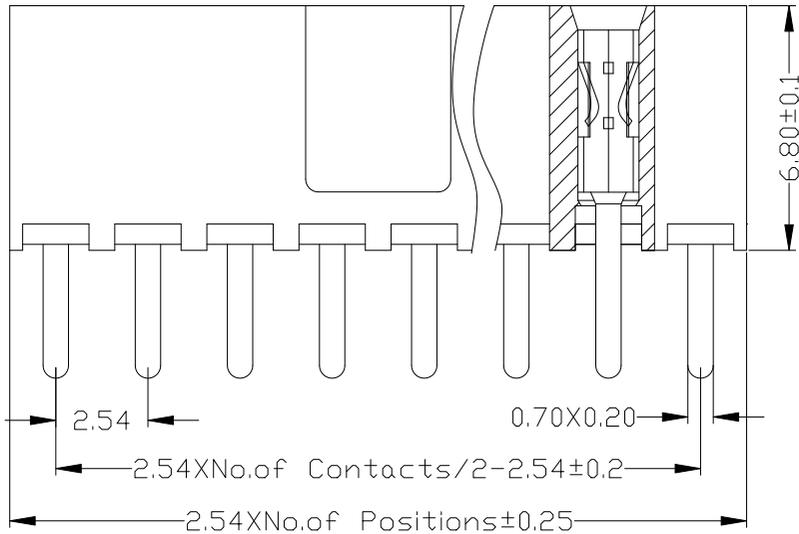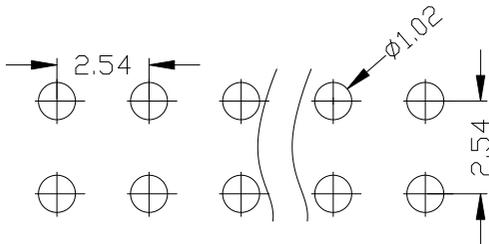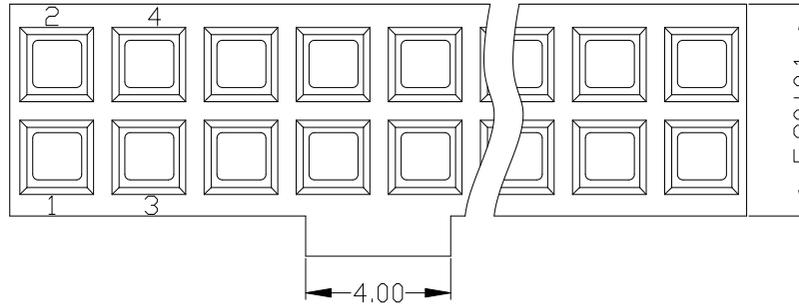

# Ordering Information

F168-12 XX XX X SP AX

NO. OF PINS PER ROW 2-40P	Contact Plating	INSULATOR MATERIAL:	PACKING
A0=0.8u"	Full Of Gold	A: PBT	A: PE Bag
A1=1u"	Semi-gold	B: PA6T	B: Tape & Reel
A2=1.5u"	B0=0.8U"	C: PA9T	C: Tube
A3=2u"	B1=1U"	D: LCP	D: Tube+CAP
A4=3u"	B2=1.5U"		E: Tray
A5=5u"	B3=2U"		
A6=10u"	B4=3U"		
A7=15u"	B5=5U"		
A8=20u"	B6=10U"		
A9=30u"	B7=15U"		
	B8=20U"		
	B9=30U"		
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		

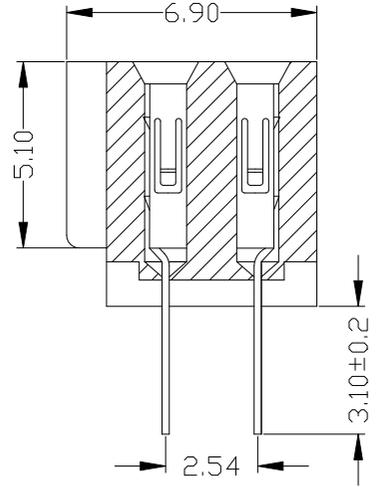

上海高霖电子有限公司

				OPERATION		SCALE		Fit		上海高霖电子有限公司	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F168-12XXXXXXSPX2
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54mm双排母 塑高6.8 180度 上插式 带凸点
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	⊕	APPROVE	Customer No.	
					DIM	TOL					