

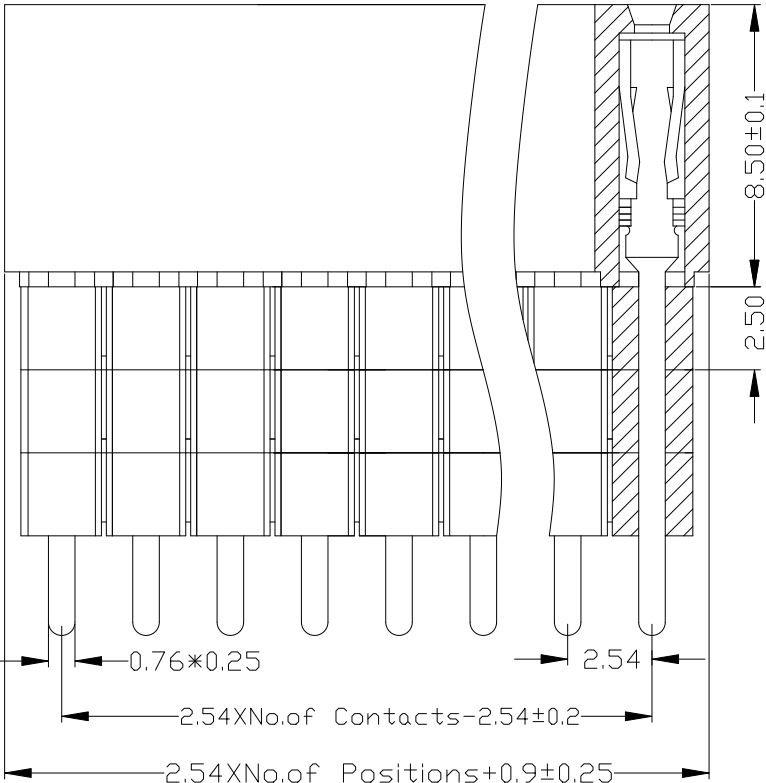



Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.
Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black
端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 3 AMP
Raring Current: 3 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40°C to +105°C
Temperture Range: -40°C to +105°C

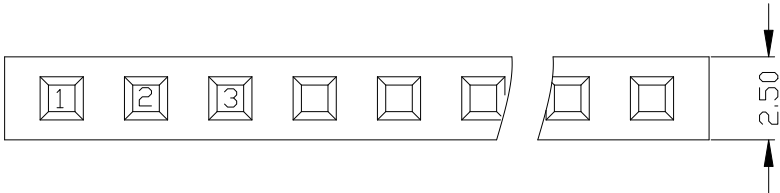

Ordering Information




F185-41 XX XX X SU X

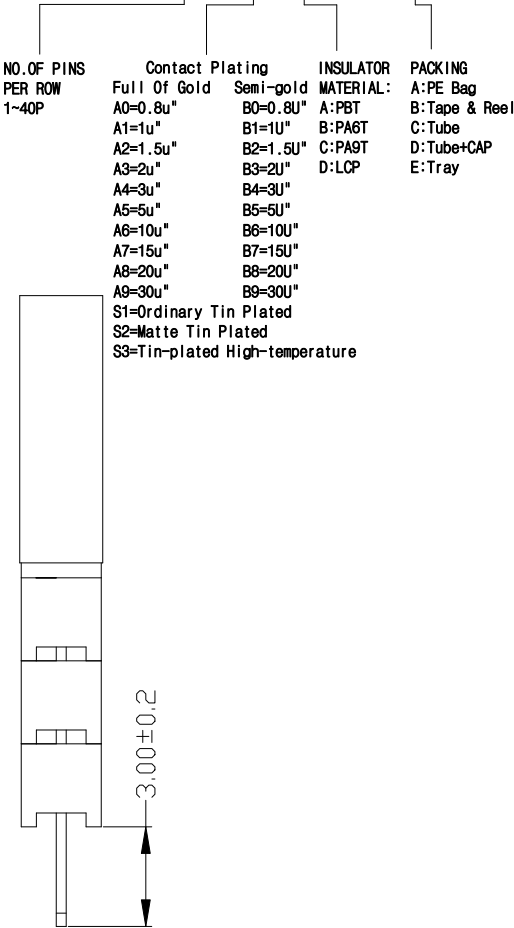

				OPERATION		SCALE		Fit	上海高霖电子有限公司			
				X.X	±0.40	UNIT		MM				
				X.XX	±0.25	SIZE	A4	DESIGN	卢小强		PART NO.	F185-41XXXXXSUX1
				X.XXX	±0.15	SHEET	1/1	CHECK			TITLE:	2.54mm单排母 加塑胶 (H=2.5) 塑高8.5 180度
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE	Customer No.		
						DIM	TOL					

Specifications


备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.
Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black
端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN
Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 3 AMP
Raring Current: 3 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40°C to +105°C
Temperture Range: -40°C to +105°C

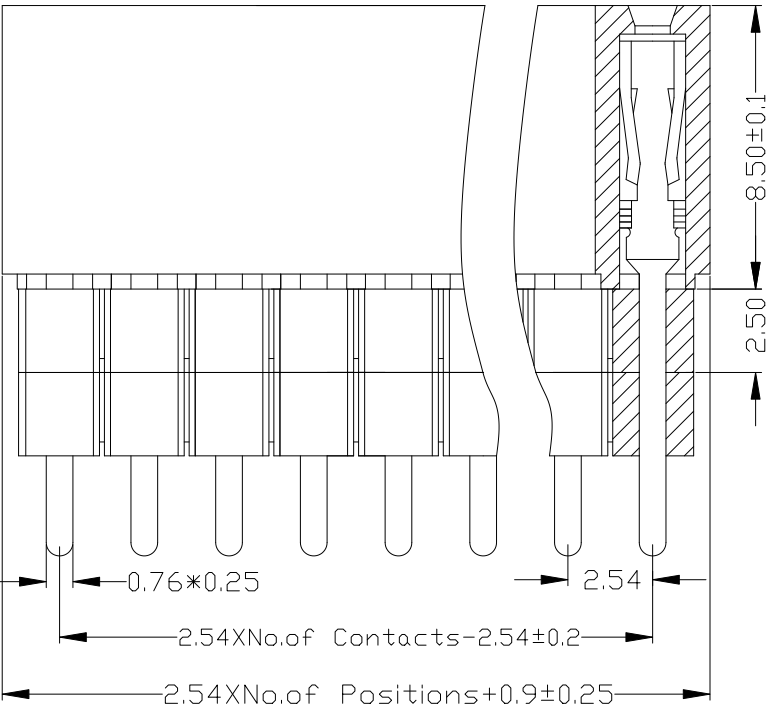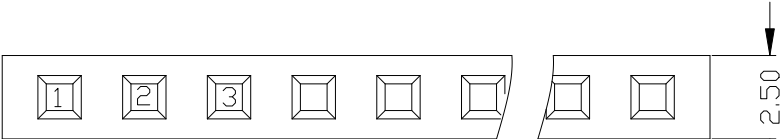

Ordering Information

F185-31 XX XX X SU X

NO.OF PINS PER ROW 1~40P	Contact Plating		INSULATOR MATERIAL:	PACKING
	Full Of Gold	Semi-gold		A:PE Bag
	A0=0.8u"	B0=0.8U"	A:PBT	B:Tape & Reel
	A1=1u"	B1=1U"	B:PA6T	C:Tube
	A2=1.5u"	B2=1.5U"	C:PA6T	D:Tube+CAP
	A3=2u"	B3=2U"	D:LCP	E:Tray
	A4=3u"	B4=3U"		
	A5=5u"	B5=5U"		
	A6=10u"	B6=10U"		
	A7=15u"	B7=15U"		
	A8=20u"	B8=20U"		
	A9=30u"	B9=30U"		
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

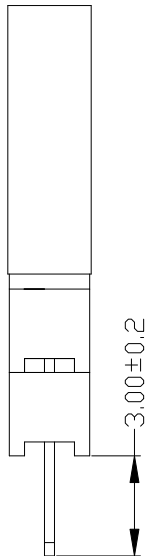

						OPERATION		SCALE		Fit	上海高霖电子有限公司			
						X.X	±0.40	UNIT		MM				
						X.XX	±0.25	SIZE	A4	DESIGN	卢小强	PART NO.	F185-31XXXXXSUX1	
						X.XXX	±0.15							
						Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.54mm单排母 加塑胶 (H=2.5) 塑高8.5 180度	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

Ordering Information

F185-21 XX XX X SU X

NO. OF PINS
PER ROW
1-40P

Contact Plating

Full Of Gold

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

Semi-gold

B0=0.8u"

B1=1u"

B2=1.5u"

B3=2u"

B4=3u"

B5=5u"

B6=10u"

B7=15u"

B8=20u"

B9=30u"

INSULATOR

MATERIAL:

A: PBT

B: PA6T

C: PA9T

D: LCP

PACKING





A: PE Bag

B: Tape & Reel

C: Tube

D: Tube+CAP

E: Tray

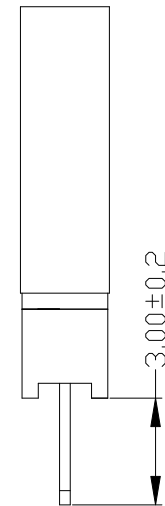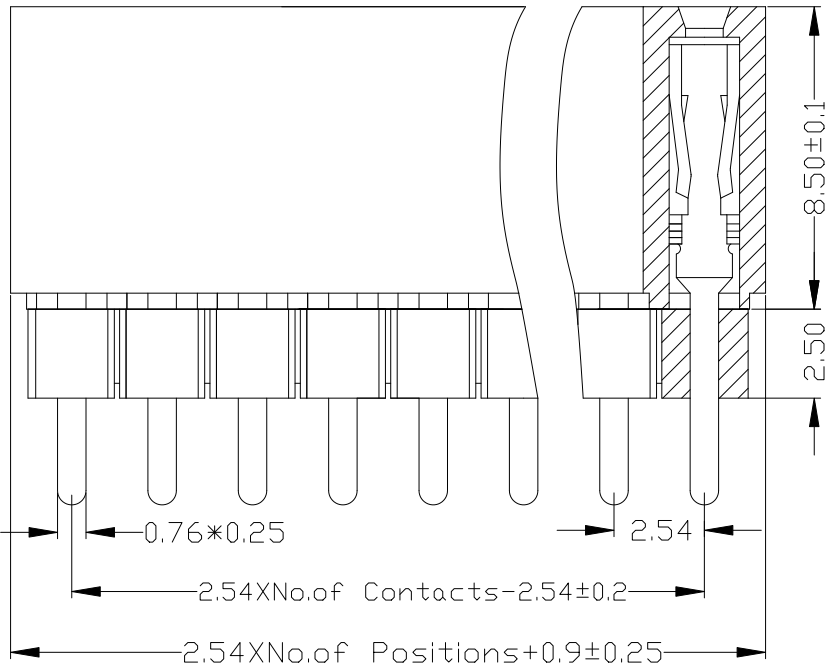

OPERATION

X.X ±0.40

X.XX ±0.25

X.XXX ±0.15

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

1/1

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

TITLE:

Customer No.

F185-21XXXXXSUX1

2.54mm单排母 加塑胶(H=2.5) 塑高8.5 180度

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	PROJ.	APPROVE	Customer No.
-----	------	--------------------------	--------	---------	-------	---------	--------------

A

B

C

D

F


F

G

H

H

5



B

EF

G

H

7