

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

Ordering Information





F169-11 XX XX X ST X

NO. OF PINS
PER ROW
1~40P

Contact Plating
Full Of Gold A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"
S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

INSULATOR MATERIAL:
A: PBT
B: PA6T
C: PA6T
D: LCP

PACKING
A: PE Bag
B: Tape & Reel
C: Tube
D: Tube+CAP
E: Tray

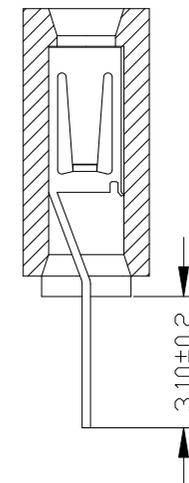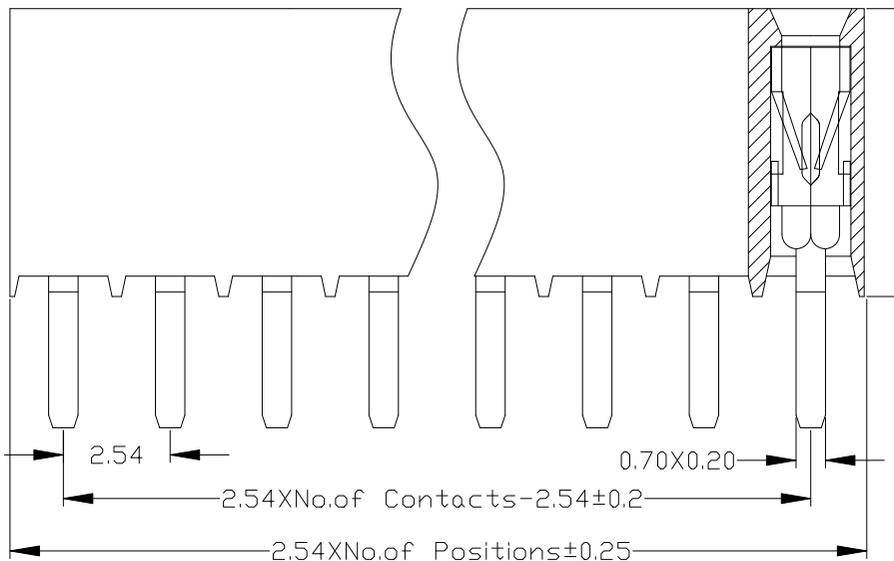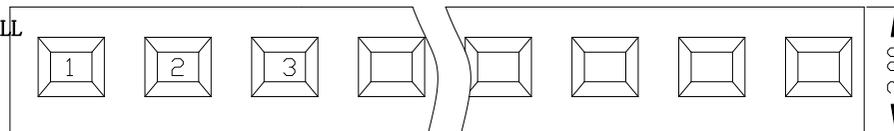

上海高霖电子有限公司

REV		DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	SCALE	Fit	上海高霖电子有限公司				
						X.X	±0.25	UNIT	MM				
						X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F169-11XXXXXSTX1
						X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54mm单排母 塑高6.8 180度 下插式
						Angle	±3°	PROJ.	☉	APPROVE		Customer No.	
						DIM	TOL						