

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperature Range: -40°C to +105°C

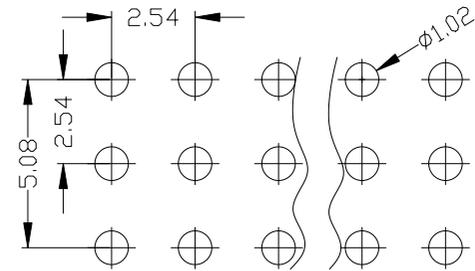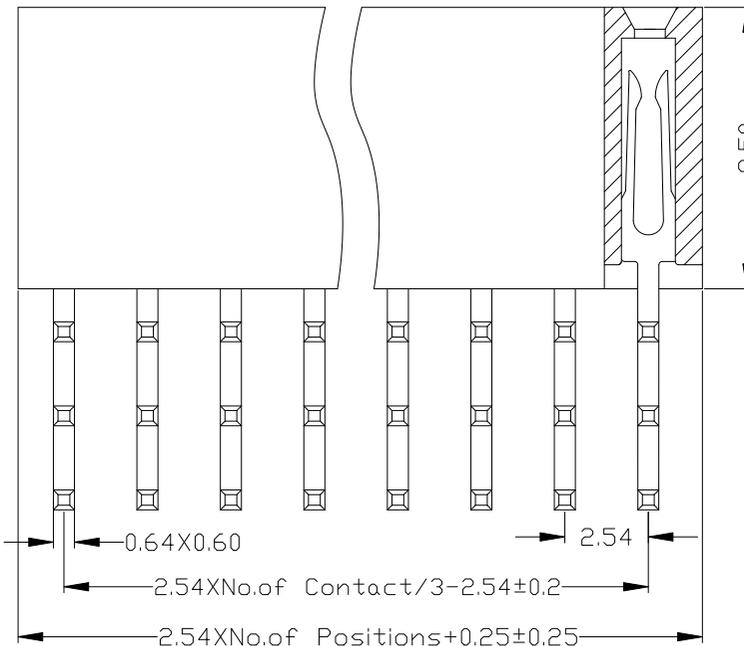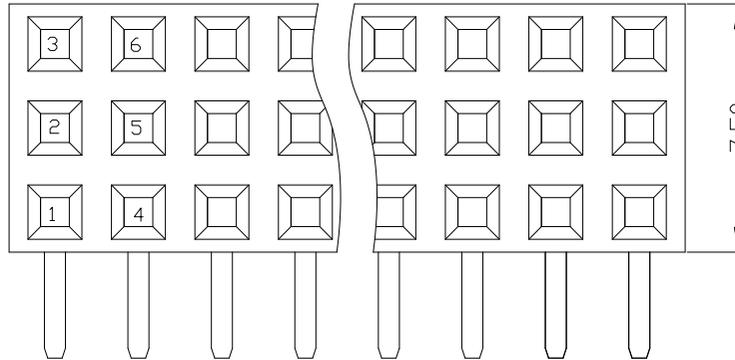

Ordering Information

F185-13 XX XX X RY AX

NO. OF PINS PER ROW 3-40P	Contact Plating		INSULATOR MATERIAL: A: PBT C: PA9T D: LCP	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
	Full Of Gold	Semi-gold		
A0=0.8u"	B0=0.8U"	A: PBT		
A1=1u"	B1=1U"	C: PA9T		
A2=1.5u"	B2=1.5U"	D: LCP		
A3=2u"	B3=2U"			
A4=3u"	B4=3U"			
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				

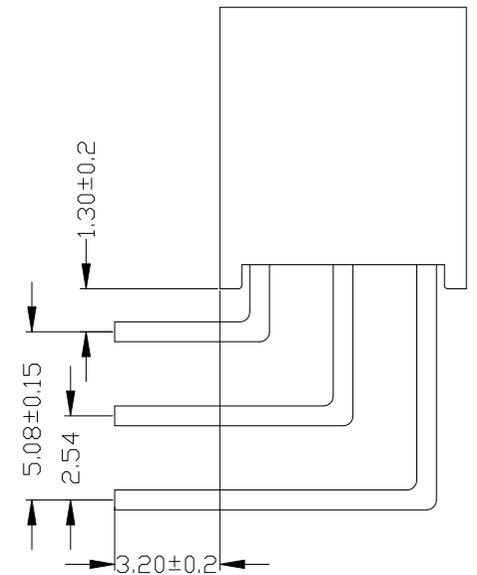

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit		上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM					
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F185-13XXXXXXRYX1		
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54mm 排母 三排 塑高8.5 90度 Y型		
					Angle	±3°	PROJ.	☉	APPROVE		Customer No.			
					DIM	TOL								

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperature Range: -40°C to +105°C

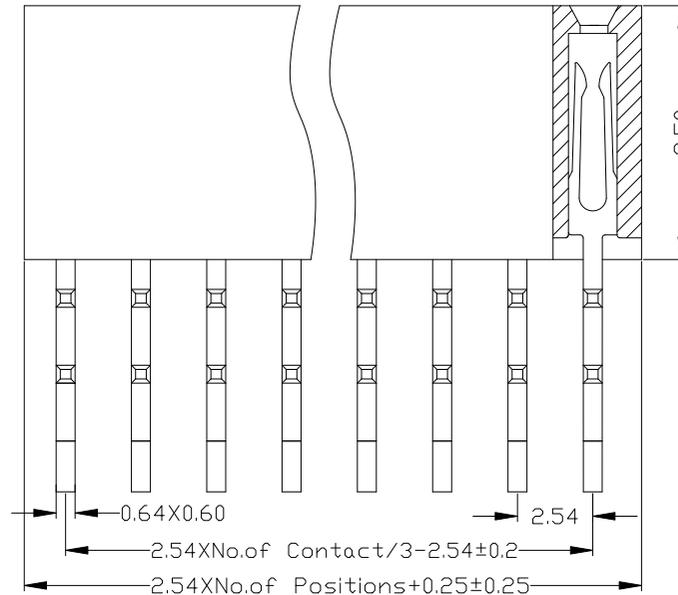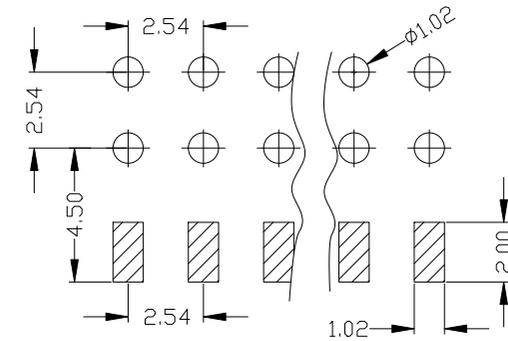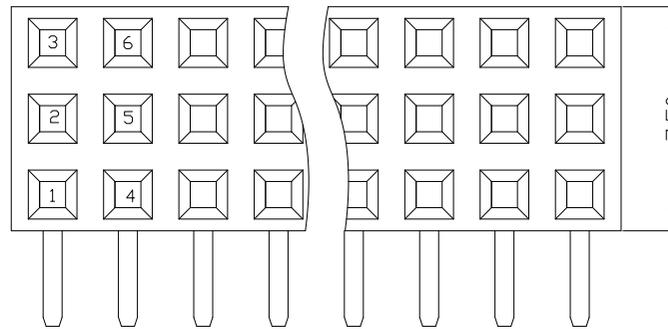

Ordering Information

F185-13 XX XX X ZY AX

NO. OF PINS PER ROW 3-40P	Contact Plating		INSULATOR MATERIAL: B: PA6T C: PA9T D: LCP	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
	Full Of Gold	Semi-gold		
A0=0.8u"	B0=0.8u"			
A1=1u"	B1=1U"			
A2=1.5u"	B2=1.5U"			
A3=2u"	B3=2U"			
A4=3u"	B4=3U"			
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				

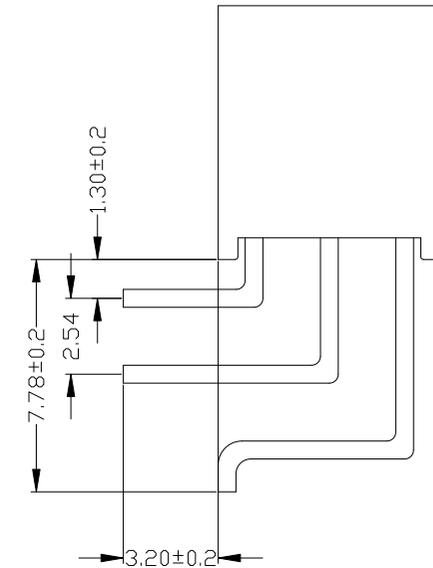

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit		上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM					
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F185-13XXXXXZYX1		
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54mm 排母 三排 塑高8.5 卧式SMT Y型		
					Angle	±3°	PROJ.	☉	APPROVE		Customer No.			
					DIM	TOL								

上海高霖电子有限公司

卢小强 PART NO. F185-13XXXXXZYX1

CHECK TITLE: 2.54mm 排母 三排 塑高8.5 卧式SMT Y型

APPROVE Customer No.