

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

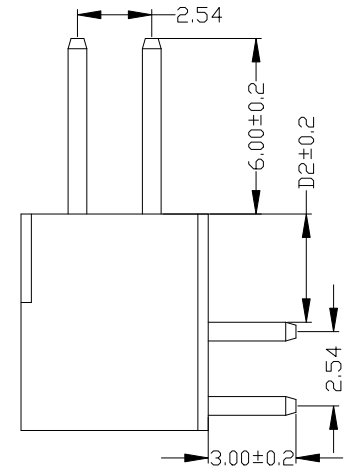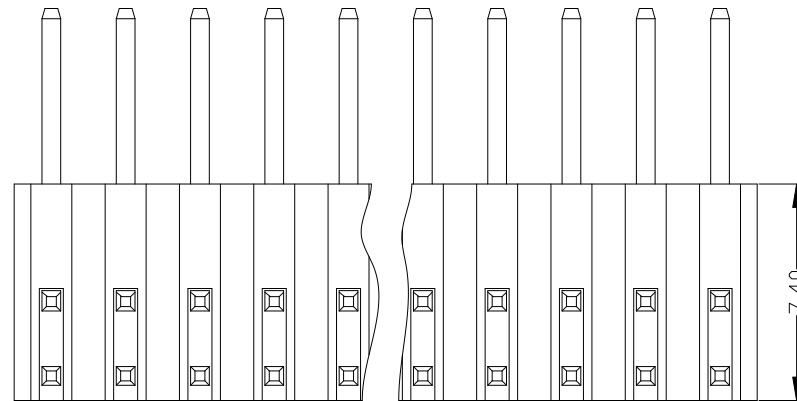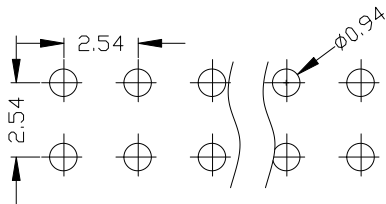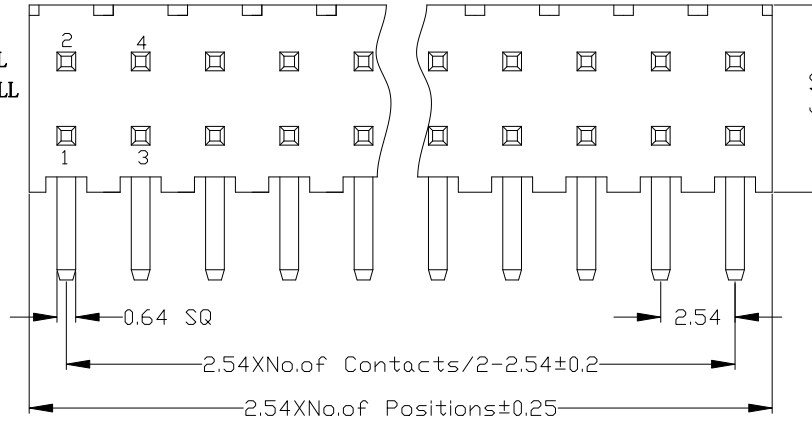

Ordering Information

P174-12 XX XX X R XXXX A X

HEIGHT OF HOUSING	NO.OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL:	LENGTH OF TERMINAL	PACKING
74:7.40mm	2~40P	Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	A:PBT B:PA6T C:PA9T D:LCP	A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
		S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature			

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

1/1

APPROVE

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

TITLE:

Customer No.

P174-12XXXXXXRXXXX1

2.54mm 双排针 塑高7.4 90度

REV DATE MODIFICATION DESCRIPTION CHANGE APPROVE

1 2 3 4 5 6 7 8 9 10