



5.08mm间距 Pitch: 5.08mm

产品信息Product Information			产品信息Product Information			订货号/通道数 Order /Poles No.			附件Accessory		
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	-	MC-RU5.08SHXX-0001	2-24	MC-JP5.0-X			
额定电流 Rated current	[A]	16	扭矩 Torque	[N·m]	-	MC-RU5.08SHXX-F-0001	2-24	MC-R-MSTB			
额定电压 Rated voltage	[V]	320	固定螺钉 Fixed screw	M2.5	-	MC-RU5.08SVXX-0001	2-24				
硬导线截面积 Solid	[mm²][AWG]	-	扭矩 Torque	[N·m]	0.3	MC-RU5.08SVXX-F-0001	2-24				
柔性导线截面积 Flexible	[mm²][AWG]	-	剥线长度 Strip length	[mm]	-						
额定冲击电压 Rated impulse voltage	[KV]	4									


MC-RU5.08SHXX-0001

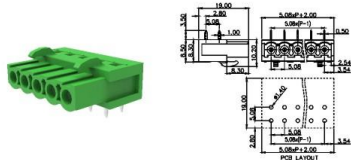


MC-RU5.08SHXX-F-0001

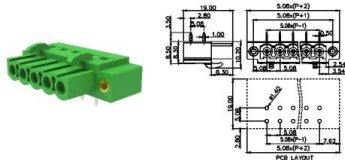

MC-RU5.08SVXX-0001

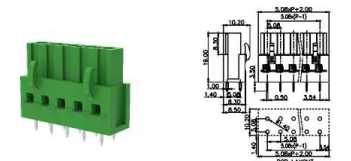


MC-RU5.08SVXX-F-0001




7.5mm间距 Pitch: 7.5mm

产品信息Product Information			产品信息Product Information			订货号/通道数 Order /Poles No.			附件Accessory		
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	M3	-	MC-RB7.5HXXC-0001	2-24				
额定电流 Rated current	[A]	18	扭矩 Torque	[N·m]	0.5	MC-RB7.5HXXC-K-0001	2-24				
额定电压 Rated voltage	[V]	630	固定螺钉 Fixed screw	M2.5	-	MC-RB7.5HXXC-I-0001	2-24				
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	扭矩 Torque	[N·m]	0.3						
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	剥线长度 Strip length	[mm]	7-8						
额定冲击电压 Rated impulse voltage	[KV]	4									


MC-RB7.5HXXC-0001



MC-RB7.5HXXC-K-0001




MC-RB7.5HXXC-I-0001




5.08mm间距 Pitch: 5.08mm

产品信息Product Information			产品信息Product Information			订货号/通道数 Order /Poles No.			附件Accessory		
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	M3	-	MC-RH5.08HXXC-B-0001	10-40	MC-JP5.0-X			
额定电流 Rated current	[A]	12	扭矩 Torque	[N·m]	0.5	MC-RH5.08HXXC-T-0001	10-40	MC-R-MSTB			
额定电压 Rated voltage	[V]	320	固定螺钉 Fixed screw	M2.5	-						
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	扭矩 Torque	[N·m]	-						
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	剥线长度 Strip length	[mm]	7-8						
额定冲击电压 Rated impulse voltage	[KV]	4									

MC-RH5.08HXXC-B-0001

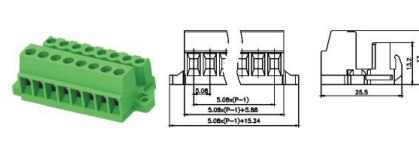


MC-RH5.08HXXC-T-0001

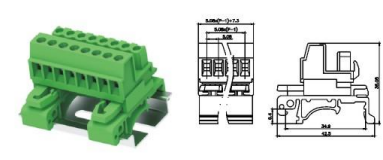


7.5mm间距 Pitch: 7.5mm

产品信息Product Information			产品信息Product Information			订货号/通道数 Order /Poles No.			附件Accessory		
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	M3	-	MC-RE7.5VXXC-0001	2-24				
额定电流 Rated current	[A]	18	扭矩 Torque	[N·m]	0.5	MC-RE7.5VXXC-K-0001	2-24				
额定电压 Rated voltage	[V]	630	固定螺钉 Fixed screw	M2.5	-	MC-RE7.5VXXC-I-0001	2-24				
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5	扭矩 Torque	[N·m]	0.3	MC-RE7.5VXXC-R-0001	2-24				
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5	剥线长度 Strip length	[mm]	7-8	MC-RE7.5VXXC-RK-0001	2-24				
额定冲击电压 Rated impulse voltage	[KV]	6									


MC-RE7.5VXXC-0001




MC-RE7.5VXXC-K-0001

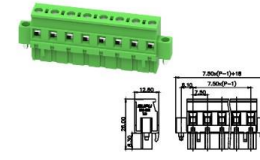

MC-RE7.5VXXC-I-0001

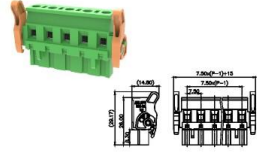

MC-RE7.5VXXC-R-0001

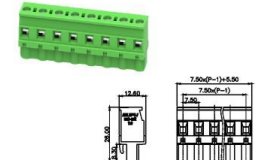

MC-RE7.5VXXC-RK-0001

