



7.62mm间距 Pitch: 7.62mm

产品信息Product Information			产品信息Product Information			附件Accessory		
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	MC-RJ7.62HXXP-0001	2-24	MC-R-MSTB	
额定电流 Rated current	[A]	12	10	扭矩 Torque [N·m]	-	MC-RJ7.62HXXP-K-0001	2-24	
额定电压 Rated voltage	[V]	630	300	固定螺钉 Fixed screw	M2.5	MC-RJ7.62HXXP-I-0001	2-24	
硬导线截面积 Solid [mm²][AWG]		0.2-2.5	24-12	扭矩 Torque [N·m]	0.3			
柔性导线截面积 Flexible [mm²][AWG]		0.2-2.5	24-12	剥线长度 Strip length [mm]	10-11			
额定冲击电压 Rated impulse voltage [KV]		6	-					



MC-RJ7.62HXXP-0001



MC-RJ7.62HXXP-K-0001





MC-RJ7.62HXXP-I-0001

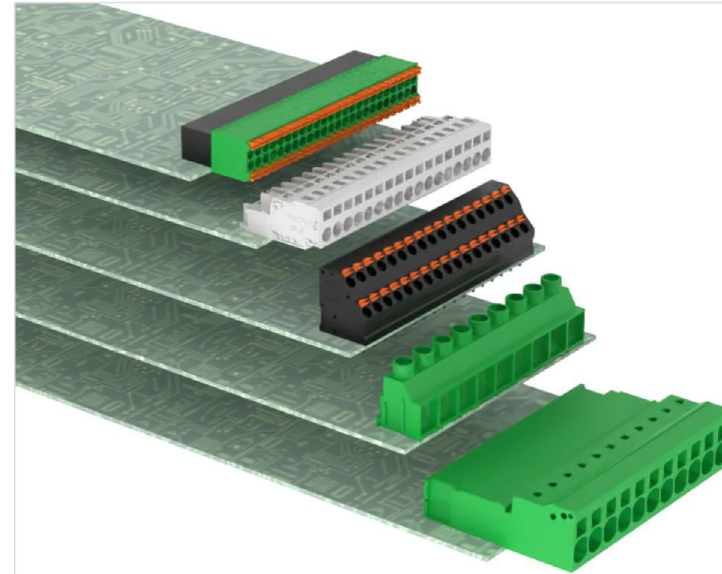



7.62mm间距 Pitch: 7.62mm

产品信息Product Information			产品信息Product Information			订货号/通道数 Order /Poles No.		订货号/通道数 Order /Poles No.	
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	MC-PA7.62HX-0002	2-24	MC-PA7.62VXX-0002	2-24	
额定电流 Rated current	[A]	18 15	扭矩 Torque	[N·m]	MC-PA7.62HX-F-0002	2-24	MC-PA7.62VXX-F-0002	2-24	
额定电压 Rated voltage	[V]	630 300	固定螺钉 Fixed screw	M2.5	MC-PA7.62HX-G-0002	2-24	MC-PA7.62VXX-G-0002	2-24	
硬导线截面积 Solid	[mm²][AWG]	- -	扭矩 Torque	[N·m] 0.3	MC-PA7.62HX-I-0002	2-24	MC-PA7.62VXX-I-0002	2-24	
柔性导线截面积 Flexible	[mm²][AWG]	- -	剥线长度 Strip length	[mm]	-	-	-	-	
额定冲击电压 Rated impulse voltage	[KV]	6 -	-	-	-	-	-	-	



MC-PA7.62HX-0002





MC-PA7.62HX-F-0002





MC-PA7.62HX-G-0002





MC-PA7.62VXX-0002



MC-PA7.62VXX-F-0002





MC-PA7.62VXX-G-0002



7.62mm间距 Pitch: 7.62mm

附件Accessory		
MC-P-MSTB		

MC-PA7.62HX-I-0002



MC-PA7.62VXX-I-0002

