
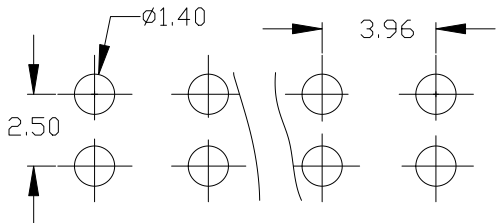
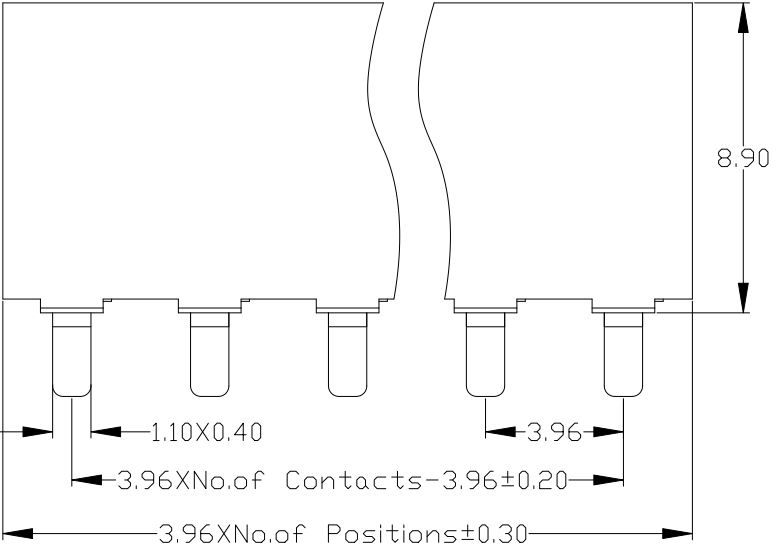


Specifications


备注 (Remark)
1. 材料 (MATERIAL)
胶芯: LCP+30%G. F UL94V-0, 颜色: 黑色.
Housing: LCP+30%G. F UL94V-0, Color: Black
端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN
Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 7 AMP
Raring Current: 7 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40°C to +105°C
Temperture Range: -40°C to +105°C

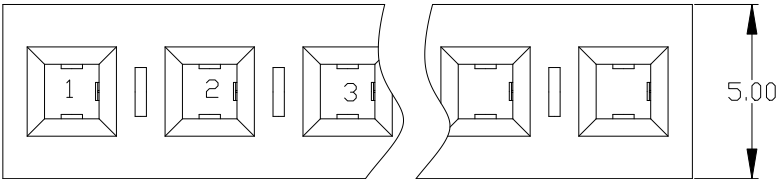

Ordering Information

F789-11 XX XX D SU AX

NO.OF PINS PER ROW 1-30P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u" S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature	INSULATOR MATERIAL: D:LCP	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"		

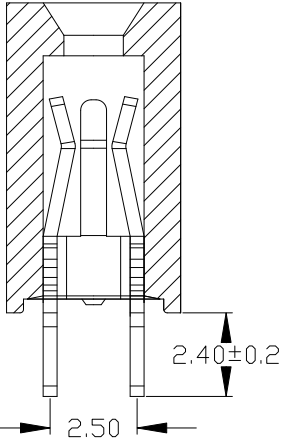

					OPERATION		SCALE		Fit	上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F789-11XXXXDSUX1	
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	3.96mm 单排母 塑高8.9 180度	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	PROJ.	APPROVE			Customer No.		
DIM	TOL												