


10.16mm间距 Pitch: 10.16mm

产品信息Product Information			产品信息Product Information			订货号/通道数 Order /Poles No.		附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew			MC-RHH10.16HXXC-0001	2-12	
额定电流 Rated current	[A]	76	55	扭矩 Torque	[N·m]	MC-RHH10.16HXXC-K-0001	2-12	
额定电压 Rated voltage	[V]	1000	600	固定螺钉 Fixed screw				
硬导线截面积 Solid	[mm ²][AWG]	0.5-16	20-6	扭矩 Torque	[N·m]			
柔性导线截面积 Flexible	[mm ²][AWG]	0.5-16	20-6	剥线长度 Strip length	[mm]			
额定冲击电压 Rated impulse voltage	[KV]	8	-					

MC-RHH10.16HXXC-0001



MC-RHH10.16HXXC-K-0001




10.16mm间距 Pitch: 10.16mm

产品信息Product Information			产品信息Product Information			订货号/通道数 Order /Poles No.		附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew			MC-PH10.16HXX-0001	2-12	
额定电流 Rated current	[A]	76	66	扭矩 Torque	[N·m]	MC-PH10.16HXX-F-0001	2-12	
额定电压 Rated voltage	[V]	1000	300	固定螺钉 Fixed screw		MC-PH10.16VXX-0001	2-12	
硬导线截面积 Solid	[mm ²][AWG]	-	-	扭矩 Torque	[N·m]	MC-PH10.16VXX-F-0001	2-12	
柔性导线截面积 Flexible	[mm ²][AWG]	-	-	剥线长度 Strip length	[mm]			
额定冲击电压 Rated impulse voltage	[KV]	8	-					


MC-PH10.16HXX-0001




MC-PH10.16HXX-F-0001



MC-PH10.16VXX-0001



MC-PH10.16VXX-F-0001



3.5mm间距 Pitch: 3.5mm

产品信息Product Information			产品信息Product Information			订货号/通道数 Order /Poles No.		附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew			MC-TI3.5HXXP-BK-0001	2-24	
额定电流 Rated current	[A]	17.5	12	扭矩 Torque	[N·m]	MC-TI3.5HXXP-BK-1600	2-24	
额定电压 Rated voltage	[V]	200	300	固定螺钉 Fixed screw		MC-TI3.5VXXP-BK-0001	2-24	
硬导线截面积 Solid	[mm ²][AWG]	0.2-1.5	28-14	扭矩 Torque	[N·m]	MC-TI3.5VXXP-BK-1600	2-24	
柔性导线截面积 Flexible	[mm ²][AWG]	0.2-1.5	28-14	剥线长度 Strip length	[mm]			
额定冲击电压 Rated impulse voltage	[KV]	2.5	-					


MC-TI3.5HXXP-BK-0001




MC-TI3.5HXXP-BK-1600



MC-TI3.5VXXP-BK-0001




MC-TI3.5VXXP-BK-1600




3.5mm间距 Pitch: 3.5mm

产品信息Product Information				产品信息Product Information				订货号/通道数 Order /Poles No.		附件Accessory	
IEC/UL数据 IEC/UL Data		IEC	UL	锁线螺钉 Locking crew		-	MC-TI3.5HXXP-BK-0001-SMT	2-24			
额定电流 Rated current		[A]	17.5	10	扭矩 Torque		[N·m]	-	MC-TI3.5VXXP-BK-0001-SMT	2-24	
额定电压 Rated voltage		[V]	160	300	固定螺钉 Fixed screw		-				
硬导线截面积 Solid		[mm ²][AWG]	0.2-1.5	24-16	扭矩 Torque		[N·m]	-			
柔性导线截面积 Flexible		[mm ²][AWG]	0.2-1.5	24-16	剥线长度 Strip length		[mm]	8-9			
额定冲击电压 Rated impulse voltage		[KV]	2.5	-							

MC-TI3.5HXXP-BK-0001-SMT

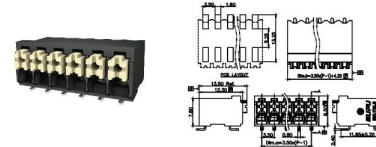

MC-TI3.5VXXP-BK-0001-SMT

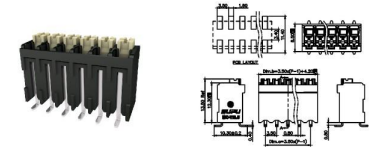

3.81mm间距 Pitch: 3.81mm

产品信息Product Information			产品信息Product Information			订货号/通道数 Order /Poles No.		附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew			MC-TM3.81HXXC-0001	2-24	
额定电流 Rated current	[A]	8	10	扭矩 Torque	[N·m]			
额定电压 Rated voltage	[V]	160	300	固定螺钉 Fixed screw				
硬导线截面积 Solid	[mm ²][AWG]	0.2-1.5	24-16	扭矩 Torque	[N·m]			
柔性导线截面积 Flexible	[mm ²][AWG]	0.2-1.5	24-16	剥线长度 Strip length	[mm]			
额定冲击电压 Rated impulse voltage	[KV]	2.5	-					

MC-TM3.81HXXC-0001

