



2.5mm间距孔型连接器 (防错) 2.5mm Female connectors(protected against mismatching)

产品信息Product Information			产品信息Product Information			订货号/通道数 Order /Poles No.	附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	-	4251XX	2-12
额定电流 Rated current	[A]	5	扭矩 Torque	[N·m]	-	4251XX/050	2-12
额定电压 Rated voltage	[V]	160	固定螺钉 Fixed screw	-	-		
额定电压 Rated voltage	[V]	160	扭矩 Torque	[N·m]	-		
破导线截面积 Solid	[mm²][AWG]	0.2-0.5 28-20	破导线截面积 Solid	[mm²][AWG]	-		
柔性导线截面积 Flexible	[mm²][AWG]	0.2-0.5 28-20	剥线长度 Strip length	[mm]	5-6		
额定冲击电压 Rated impulse voltage	[KV]	2.5					

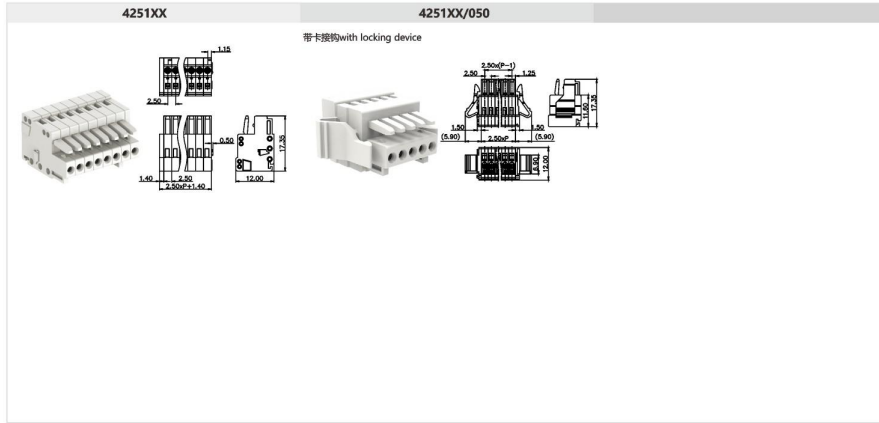


2.5mm间距焊针插座 (防错) 2.5mm Solder pin(protected against mismatching)

产品信息Product Information			产品信息Product Information			订货号/通道数 Order /Poles No.	附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	-	4252XX	2-12
额定电流 Rated current	[A]	4	扭矩 Torque	[N·m]	-	4253XX	2-12
额定电压 Rated voltage	[V]	160	固定螺钉 Fixed screw	-	-		
额定电压 Rated voltage	[V]	160	扭矩 Torque	[N·m]	-		
破导线截面积 Solid	[mm²][AWG]	-	破导线截面积 Solid	[mm²][AWG]	-		
柔性导线截面积 Flexible	[mm²][AWG]	-	剥线长度 Strip length	[mm]	-		
额定冲击电压 Rated impulse voltage	[KV]	2.5					

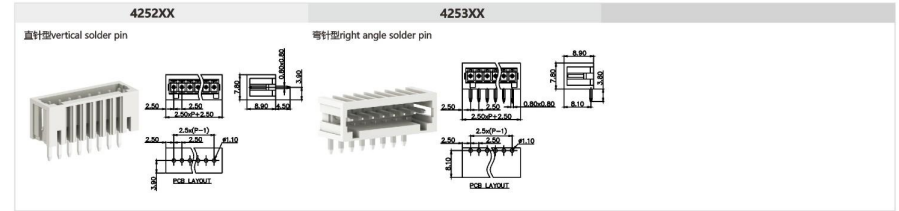


2.5mm间距针型连接器 (防错) 2.5mm Male connector with spring-cage clamp (protected against mismatching)

产品信息Product Information			产品信息Product Information			订货号/通道数 Order /Poles No.	附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	-	4254XX	2-12
额定电流 Rated current	[A]	13.5	扭矩 Torque	[N·m]	-		
额定电压 Rated voltage	[V]	160	固定螺钉 Fixed screw	-	-		
额定电压 Rated voltage	[V]	160	扭矩 Torque	[N·m]	-		
破导线截面积 Solid	[mm²][AWG]	0.2-0.5 24-16	破导线截面积 Solid	[mm²][AWG]	-		
柔性导线截面积 Flexible	[mm²][AWG]	0.2-0.5 24-16	剥线长度 Strip length	[mm]	5-6		
额定冲击电压 Rated impulse voltage	[KV]	2.5					



3.5mm间距孔型连接器 (防错) 3.5mm Female connectors(protected against mismatching)

产品信息Product Information			产品信息Product Information			订货号/通道数 Order /Poles No.	附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	-	4351XX	2-24
额定电流 Rated current	[A]	10	扭矩 Torque	[N·m]	-	4351XX/050	2-24
额定电压 Rated voltage	[V]	160	固定螺钉 Fixed screw	-	-	4351XX/010	2-24
额定电压 Rated voltage	[V]	160	扭矩 Torque	[N·m]	-	435013	
破导线截面积 Solid	[mm²][AWG]	0.2-1.5 28-16	破导线截面积 Solid	[mm²][AWG]	-		
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5 28-16	剥线长度 Strip length	[mm]	7-8		
额定冲击电压 Rated impulse voltage	[KV]	2.5					

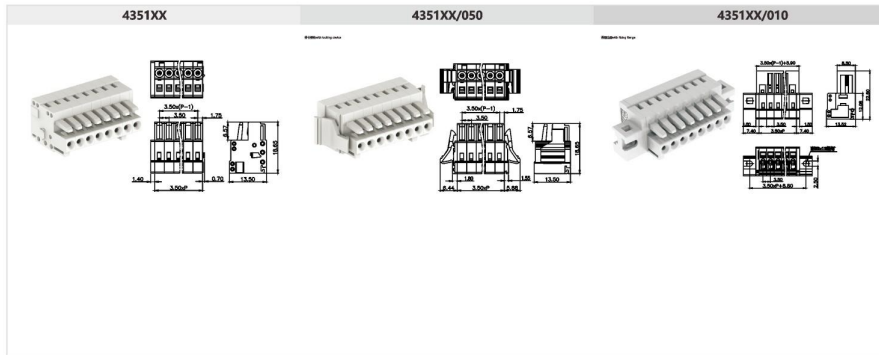

3.5mm间距焊针插座 (防错) 3.5mm Solder pin(protected against mismatching)

产品信息Product Information			产品信息Product Information			订货号/通道数 Order /Poles No.	附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	-	4352XX	2-24
额定电流 Rated current	[A]	10	扭矩 Torque	[N·m]	-	4352XX-01D	2-24
额定电压 Rated voltage	[V]	160	固定螺钉 Fixed screw	-	-	4353XX	2-24
额定电压 Rated voltage	[V]	160	扭矩 Torque	[N·m]	-	4352XX-01D	2-24
破导线截面积 Solid	[mm²][AWG]	-	破导线截面积 Solid	[mm²][AWG]	-		
柔性导线截面积 Flexible	[mm²][AWG]	-	剥线长度 Strip length	[mm]	-		
额定冲击电压 Rated impulse voltage	[KV]	2.5					

