


多用弹簧连接器(MCS连接器) MCS connectors with spring-cage clamp


5.0mm间距焊针插座(防错) 5.0mm Solder pin(protected against mismatching)

产品信息Product Information			产品信息Product Information		订货号/通道数 Order /Poles No.	订货号/通道数 Order /Poles No.
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	4507XX	4507XX-03D
额定电流 Rated current	[A]	12 15	扭矩 Torque	[N·m]	4507XX/110	4507XX-04D
额定电压 Rated voltage	[V]	320 300	固定螺钉 Fixed screw	-	4507XX-00D	4507XX-05D
硬导线截面积 Solid	[mm²][AWG]	- -	扭矩 Torque	[N·m]	4507XX-01D	4507XX-06D
柔性导线截面积 Flexible	[mm²][AWG]	- -	剥线长度 Strip length	[mm]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4.0	-	-	-	-

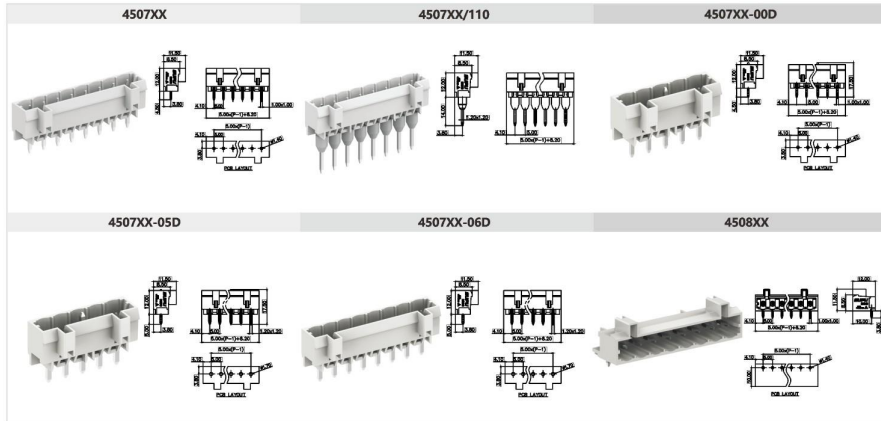

5.0mm间距焊针插座(防错) 5.0mm Solder pin(protected against mismatching)

订货号/通道数 Order /Poles No.	附件Accessory
4508XX	2-24
450015	

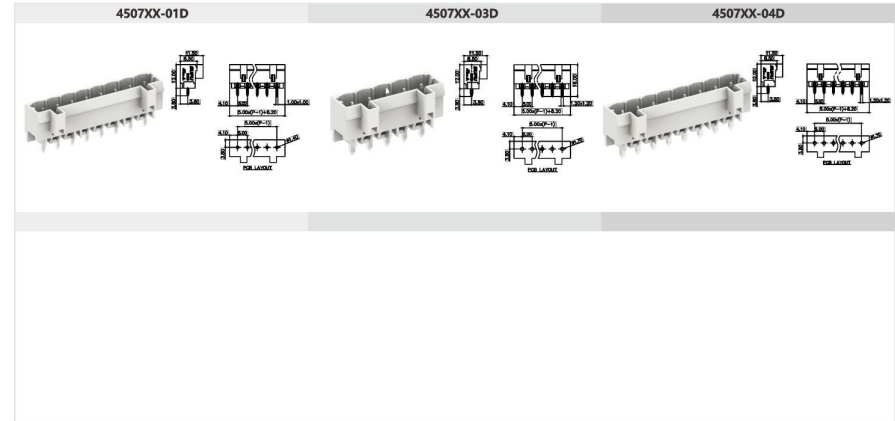

5.0mm间距孔型弯头连接器(防错) 5.0mm Female right head connector with spring-cage clamp (protected against mismatching)

产品信息Product Information			产品信息Product Information		订货号/通道数 Order /Poles No.	附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	45065X	450021
额定电流 Rated current	[A]	12 15	扭矩 Torque	[N·m]	45065X/010	450023
额定电压 Rated voltage	[V]	320 300	固定螺钉 Fixed screw	-	45065X/030	450014
硬导线截面积 Solid	[mm²][AWG]	0.2-2.5 28-12	扭矩 Torque	[N·m]	-	450012
柔性导线截面积 Flexible	[mm²][AWG]	0.2-2.5 28-12	剥线长度 Strip length	[mm]	8-9	22533X
额定冲击电压 Rated impulse voltage	[KV]	4.0	-	-	-	-



5.0mm间距孔型弯头带焊针(防错) 5.0mm Female connector with spring-cage clamp with solder pin(protected against mismatching)

产品信息Product Information			产品信息Product Information		订货号/通道数 Order /Poles No.	附件Accessory
IEC/UL数据 IEC/UL Data	IEC	UL	锁线螺钉 Locking crew	-	45075X	2-24
额定电流 Rated current	[A]	12 15	扭矩 Torque	[N·m]	45075X/110	2-24
额定电压 Rated voltage	[V]	320 300	固定螺钉 Fixed screw	-	45085X	2-24
硬导线截面积 Solid	[mm²][AWG]	- -	扭矩 Torque	[N·m]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	- -	剥线长度 Strip length	[mm]	-	-
额定冲击电压 Rated impulse voltage	[KV]	4.0	-	-	-	-

