

Specifications

Current Rating: 0.5A~1A AC,DC(Per Pin)
Voltage Rating: 200V AC,DC(Per Pin)
Temperature Range: -25°C ~ +85°C
Contact Resistance: 40mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute

Standards

Ordering Code

① A1008 ② X- ③ XP

- ① Series No.
- ② Housing Type: H=Housing
- ③ No. of Circuits



A1008 SERIES



1.00mm Pitch Wire to Board Connector

A1008H-30P

1.00mm Pitch Housing


Reference Information:

- *Material: Housing: Thermoplastic
Shell: Stainless Steel
Lock lever: Stainless Steel
- *Suitable A1008 Series Terminal

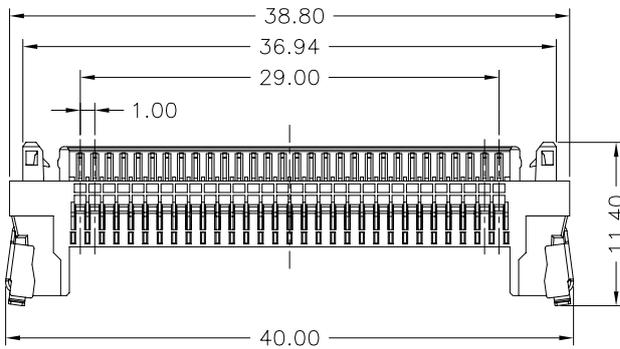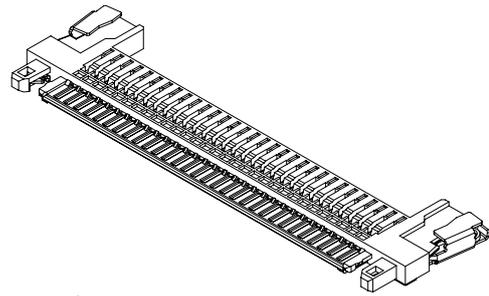

P/N LEGEND

A1008H-XP	X	X	X	XX	X	XX	X
	①	②	③	④	⑤	⑥	⑦
①	Halogen Free or Not						
②	Material						
③	Color						
④	Plating Code for Contacts						
⑤	Plating Code						
⑥	Option Code						
⑦	Packing Code						



A
B
C
F