

Specifications

Current Rating: 1.5~3A AC,DC(Per Pin)

Voltage Rating: 250V AC,DC(Per Pin)

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

A

B

C

F

Ordering Code

① ② ③ ④
A2501-X X X

- ① Series No.
- ② Plating Code: T=Tin-Plated
- ③ Material: P=Phosphor Bronze
- ④ E=Stamping Before Plating

① ② ③
A2501 XX-XP


- ① Series No.
- ② Housing Type:H=Housing
- ③ No. of Circuits

A 25 10 - XXX

-2.50mm Pitch Crimp Terminal

Reference Information:

*Used in A2510 Series Housing

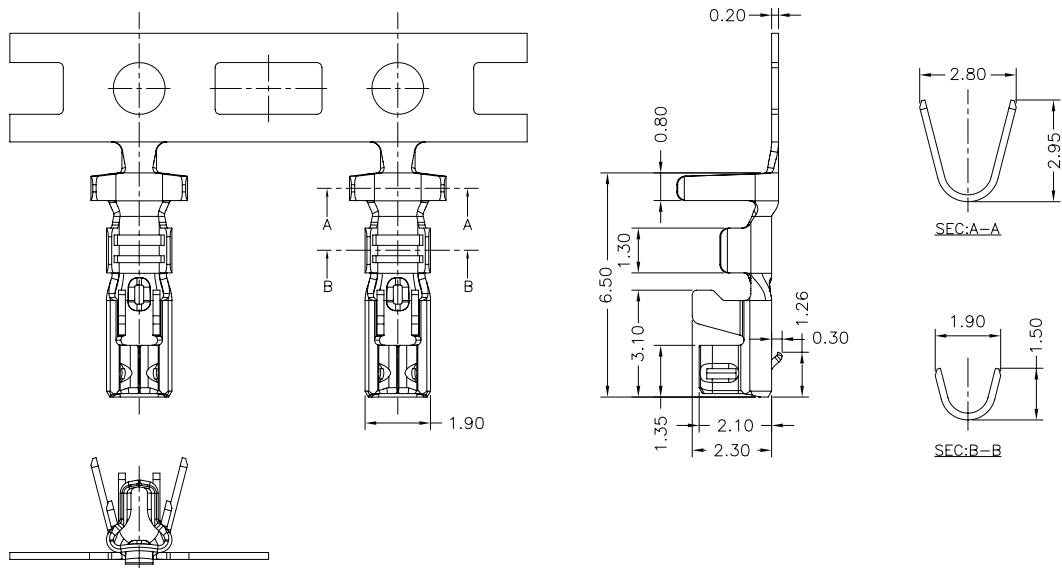

Ordering Information & Specifications:

Unit:mm

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
A2510-TPE	AWG#22-#28	1.90mm(Max)	Phosphor Bronze	Tin-Plated	8,000Pcs

Note:E-Stamping Before Plating



A 25 10 H

2.50mm Pitch Housing

Reference Information:

*Material: Thermoplastic

*Suitable A2510 Series Terminal

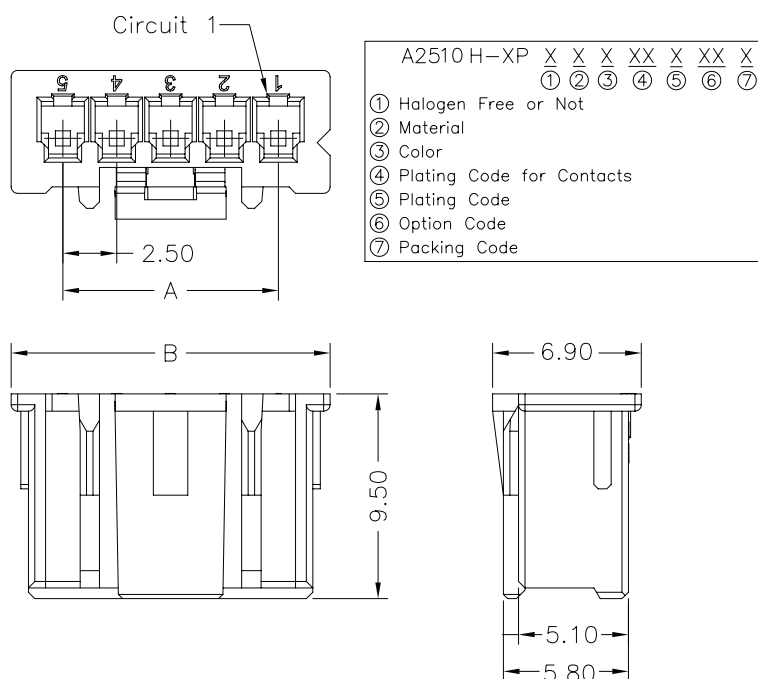

Dimensions:

Circuit No.	Dimensions	
	A	B
02	2.50	7.30
03	5.00	9.80
04	7.50	12.30
05	10.00	14.80
06	12.50	17.30
07	15.00	19.80
08	17.50	22.30
09	20.00	24.80
10	22.50	27.30
11	25.00	29.80
12	27.50	32.30
13	30.00	34.80
14	32.50	37.30
15	35.00	39.80
20	47.50	52.30