

间距 11.1 mm
Pitch .437"

栅栏式接线端子
Barrier Terminal Blocks



B 11.1
接线端子参数

额定电参数
压线范围
螺钉力矩
外壳
工频耐电压
绝缘抵抗
使用温度


Rating
Wire Range
Screw/Torque Rating
Insulator Body
Insulation withstand Voltage
Insulation Resistance
Operating Temperature

600V, 40A
18~10AWG
M4, 18Kgf c m
PBT, UL94 V0
AC2500, 1Min.
1000MΩ, DC1000V
-40℃~+130℃



B 11.1 C-HD

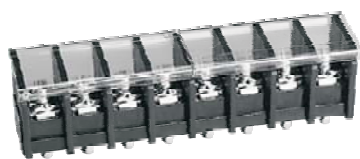

How to Order

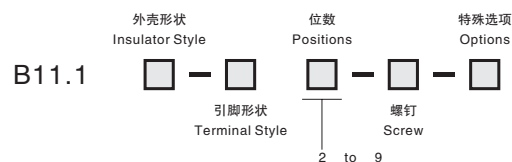

B 11.1-HD

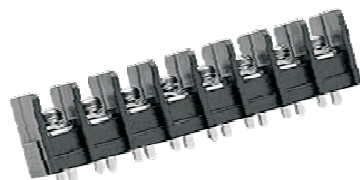

外壳形状
Insulator Style

-/C: 无/有上盖 Without/With Cover
-/F: 无/有端部安装耳 Without/With Mount end

引脚形状
Terminal Style

见左图 See left drawing

螺钉
Screw

空白: 标准配置 Blank: Std. Screw