

间距 12.7、14.5 mm
Pitch .500" .571"



栅栏式接线端子
Barrier Terminal Blocks



B 12.7 接线端子参数

额定电参数
压线范围
螺钉力矩
外壳
工频耐电压
绝缘抵抗
使用温度

Rating
Wire Range
Screw/Torque Rating
Insulator Body
Insulation withstand Voltage
Insulation Resistance
Operating Temperature

600V, 45A
18~8 AWG
M4, 18Kgf c m
PBT, UL94 V0
AC2500, 1Min.
1000MΩ, DC500V
-40℃~+130℃

B 12.7-HFR

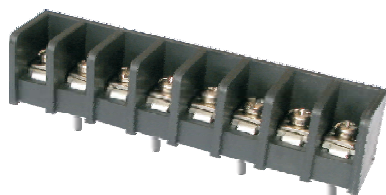

How to Order

B12.7-HFR

位数
Positions



2 to 16



PM 16 接线端子参数

额定电参数
压线范围
螺钉力矩
外壳
工频耐电压
绝缘抵抗
使用温度

Rating
Wire Range
Screw/Torque Rating
Insulator Body
Insulation withstand Voltage
Insulation Resistance
Operating Temperature

600V, 40A
22~8 AWG
M5, 25Kgf c m
PBT, UL94 V0
AC4000, 1Min.
1000MΩ, DC500V
-40℃~+130℃

B 14.5TC-HD

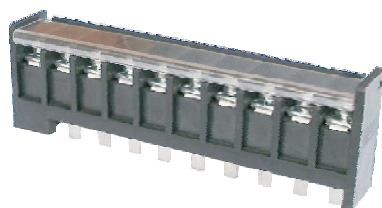

How to Order

B14.5TC-HD

位数
Positions



2 to 12