
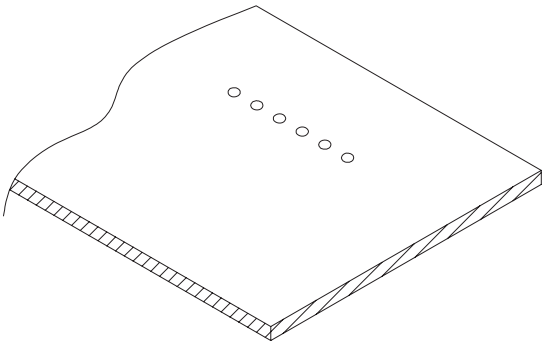





Specifications

Current Rating: 1A AC,DC(Per Pin)
Voltage Rating: 200V AC,DC(Per Pin)
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute

Standards

Assembly Layout

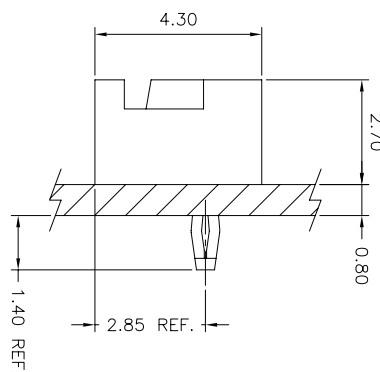

Ordering Code

① ② ③ ④ ⑤
B1501 X-X X X

- ① Series No.
- ② Terminal Type: R=Right Angle
- ③ Plating Code: T=Tin-Plated
- ④ Material: B=Brass
- ⑤ E=Stamping Before Plating

① ② ③
B1501 XX-XP

- ① Series No.
- ② Housing type: HR=Right Angle Housing
- ③ No. of circuits



B1501 SERIES


1.50mm Pitch Board-in Connector

B1501R-XXX

1.50mm pitch 90° Crimp Terminal

Reference Information:

*Used in B1501HR Series Housing

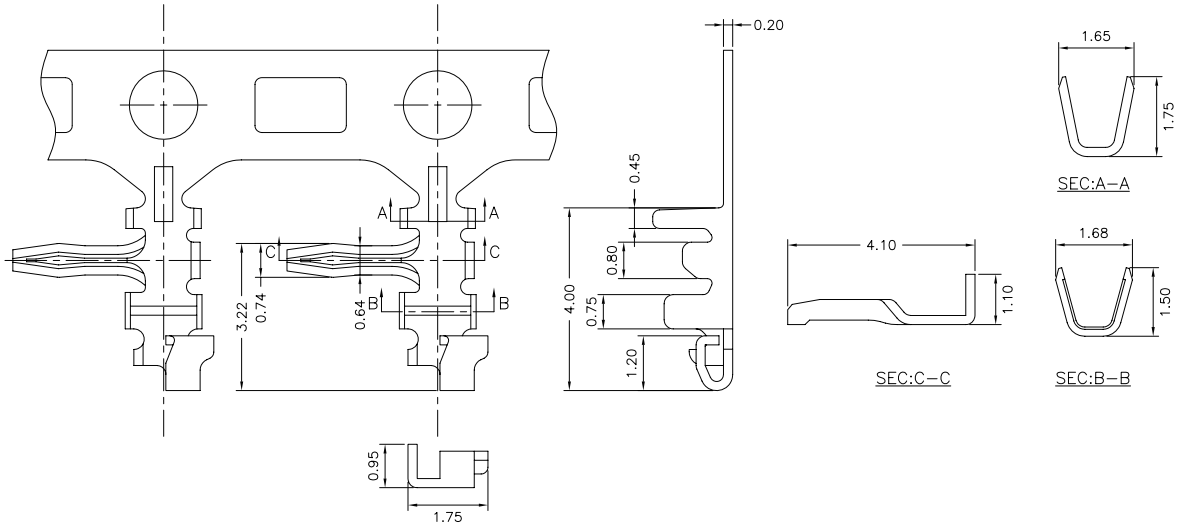

Ordering Information & Specifications:

Unit:mm

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
B1501R-TBE	AWG#28-#30	1.00mm(max)	Brass	Tin-Plated	10,000Pcs

Note:E-Stamping Before Plating



B1501HR

1.50mm pitch 90° Housing

Reference Information:

*Material: Thermoplastic

*Suitable B1501R Series Terminal

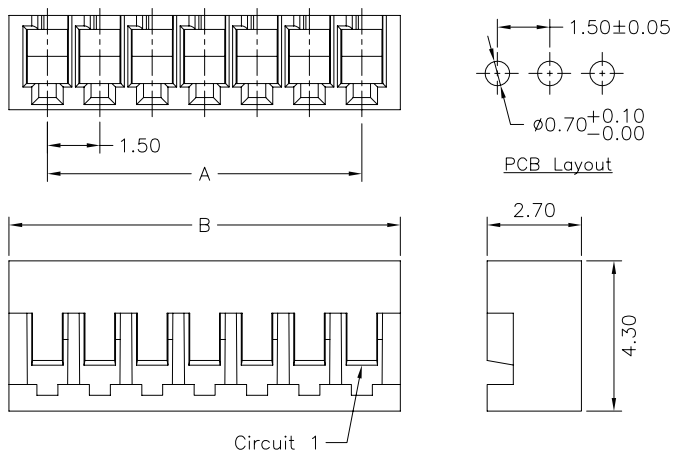

B1501HR-XP	X	X	X	XX	X	XX	X
	①	②	③	④	⑤	⑥	⑦
①	Halogen Free or Not						
②	Material						
③	Color						
④	Plating Code for Contacts						
⑤	Plating Code						
⑥	Option Code						
⑦	Packing Code						

Dimensions:

Circuit No.	Dimensions	
	A	B
02	1.50	3.70
03	3.00	5.20
04	4.50	6.70
05	6.00	8.20
06	7.50	9.70
07	9.00	11.20
08	10.50	12.70
09	12.00	14.20
10	13.50	15.70
11	15.00	17.20
12	16.50	18.70
13	18.00	20.20
14	19.50	21.70
15	21.00	23.20

Unit:mm