
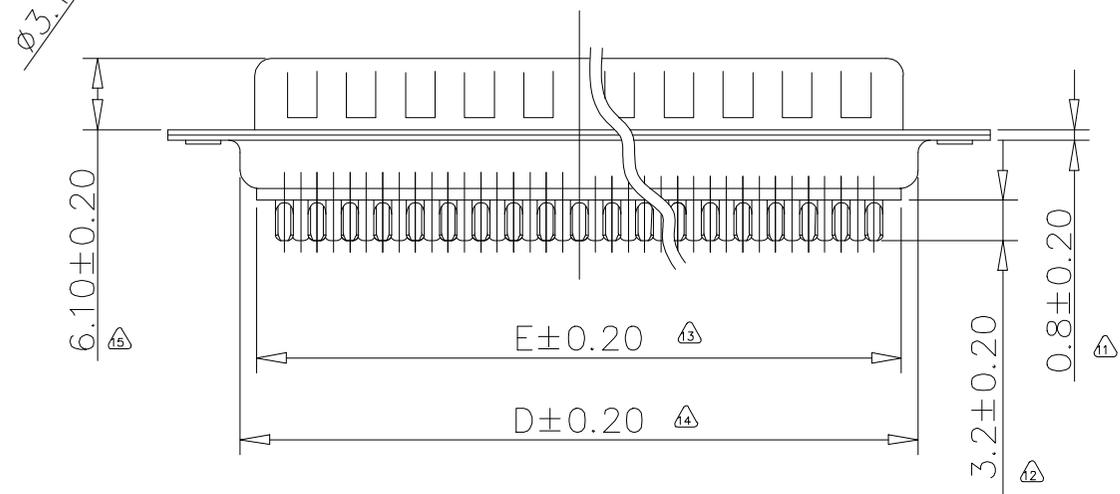
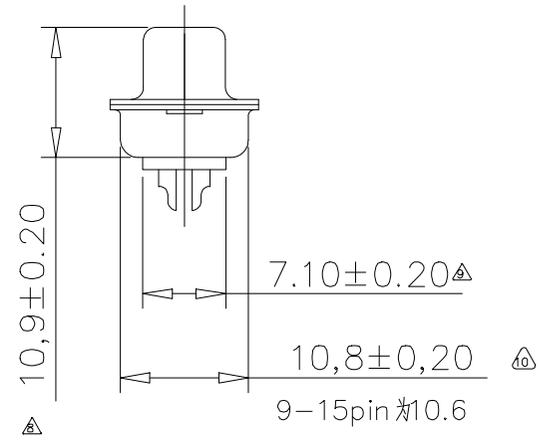


POLES	A	B	C	D	E
9	30.80	24.99	16.92	19.00	15.60
15	39.23	33.28	25.38	27.70	24.60
25	53.05	47.04	38.84	41.10	38.10
37	69.50	63.50	55.43	57.30	54.45

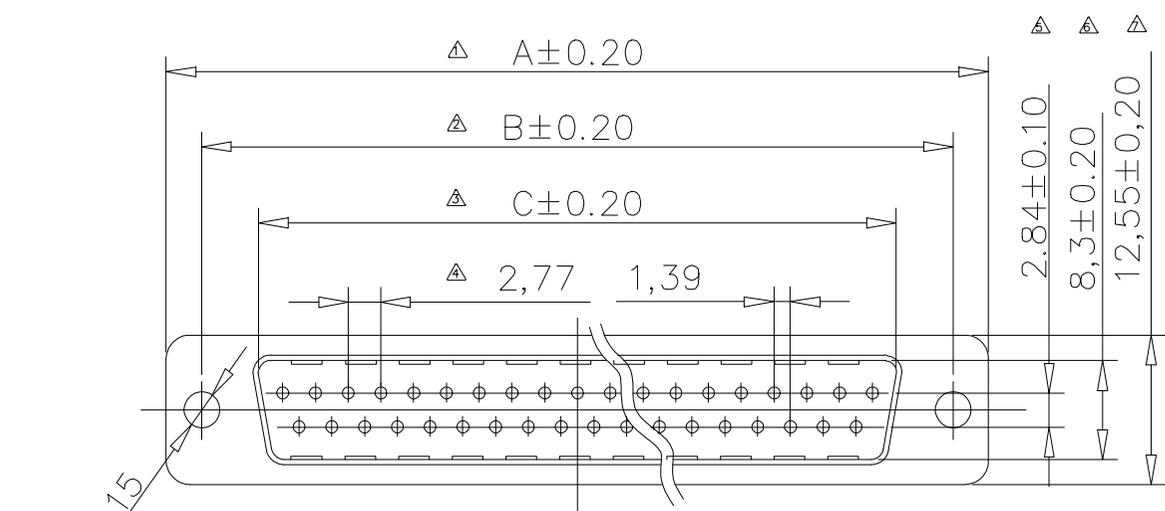

NOTES:
 INSULATION RESESTANCE(MIN.):1000MOHMS
 CURRENT RATING(MAX.): 3amp AC/DC
 WITHSTANDING VOLTAGE:1000VAC
 CONTACT RESISTANCE(MAX.)30m chms
 OPERATION TEMPERATURE: -55~+105°
 MATERIAL:
 CONTACT: PHOSPHOR BRONZE
 INSULATION:PBT+30%GLASS FIBER.UL 94V-0
 SHELL;STEEL
 NOTICE: THE DIMENSION MAKED WITH " *△"
 MUST BE CONTROLLED BY QC.

				日期	型号: DB-15P(白)		
				2024-09-26			
				绘图			
				段圭兴	货品编码	----	公差
				审核	客户编号	----	X.X±0.25
				-----	比例	----	X.XX±0.20
				批准	单位	mm	X.XXX±0.10
				-----	页面	1/1	Angle±3°
序号	日期	修正内容	变更人				

 上海高霖电子有限公司
 Gaolin Shanghai gaolin EElectronic Co.,Ltd

图号: GLDW20240926011

版本V1.0

E/标准件

