



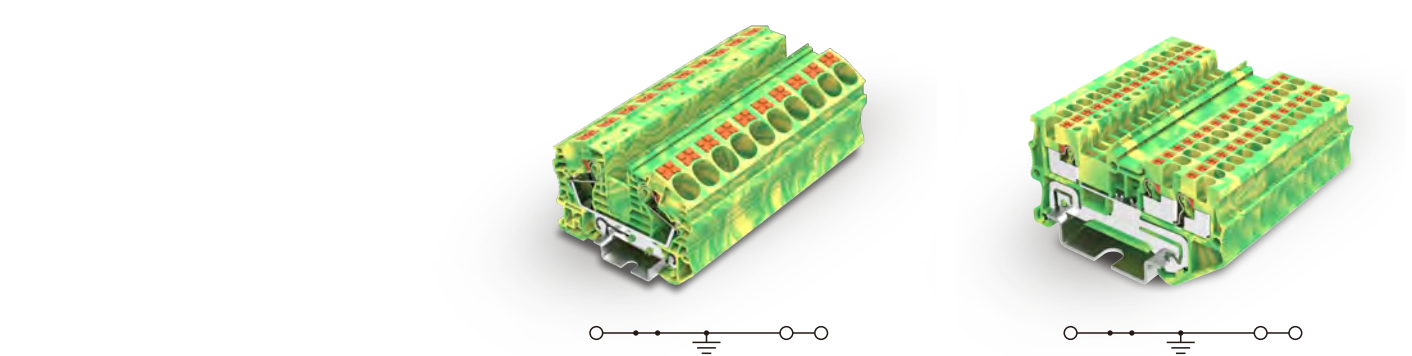

	16mm ² 一进一出接地端子 1-1 Feed Through Ground Terminal Block	1.5mm ² 一进两出接地端子 1-2 Feed Through Ground Terminal Block
	技术参数Technical Parameter	技术参数Technical Parameter
尺寸Size	厚度Thickness 12.2 宽度Width 75.4 高度Height 50.9 IEC * UL * 额定电压Rated Voltage [V] * 额定电流Rated Current [A] 接线容量Wire Range [mm ²] 0.5-25 [AWG] 20-4	厚度Thickness 3.5 宽度Width 57.1 高度Height 30.5 IEC * UL * 额定电压Rated Voltage [V] * 额定电流Rated Current [A] 接线容量Wire Range [mm ²] 0.2-1.5 [AWG] 26-14
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94 剥线长度Strip length [mm] 18	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94 剥线长度Strip length [mm] 8-9
产品Product	颜色Colour	颜色Colour
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green * *	黄绿Yellow green * *
配套附件Accessory	配套附件Accessory	配套附件Accessory
端板Cover Plate 厚度2.2mm Thickness2.2mm	灰Gray 橙Orange 蓝Blue	灰Gray 橙Orange 蓝Blue
补偿端板Compensatory Plate 厚度1.00mm Thickness1.00mm	灰Gray	灰Gray
跨接件Jumper 位数Poles No. 2 3 4 ... 9 10	颜色Colour 黄Yellow 黄Yellow 黄Yellow 黄Yellow 黄Yellow	颜色Colour 黄Yellow 黄Yellow 黄Yellow 黄Yellow 黄Yellow
正面标记Front Marker 10位PCS	正面标记和侧面标记Front And Side Marker 可提供印字服务Printing Service	正面标记和侧面标记Front And Side Marker 可提供印字服务Printing Service

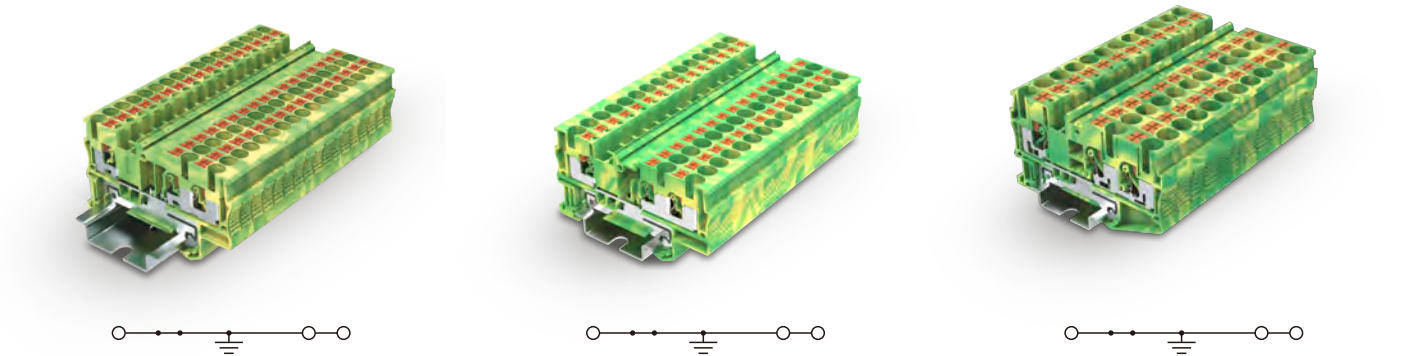

	2.5mm ² 一进两出接地端子 1-2 Feed Through Ground Terminal Block	4mm ² 一进两出接地端子 1-2 Feed Through Ground Terminal Block	6mm ² 一进两出接地端子 1-2 Feed Through Ground Terminal Block
	技术参数Technical Parameter	技术参数Technical Parameter	技术参数Technical Parameter
厚度Thickness	5.2	6.2	8.2
宽度Width	60.2	66.3	74.5
高度Height	35.2	35.5	42.2
IEC	*	*	*
UL	*	*	*
额定电压Rated Voltage	[V]	[V]	[V]
额定电流Rated Current	[A]	[A]	[A]
接线容量Wire Range	[mm ²] 0.2-4 [AWG] 26-12	[mm ²] 0.2-6 [AWG] 24-10	[mm ²] 0.5-10 [AWG] 20-8
其余参数Other Parameters	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94 剥线长度Strip length [mm] 8-10	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94 剥线长度Strip length [mm] 8-10	绝缘材料/阻燃等级, 符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94 剥线长度Strip length [mm] 10-12
产品Product	颜色Colour	颜色Colour	颜色Colour
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	黄绿Yellow green * *	黄绿Yellow green * *	黄绿Yellow green * *
配套附件Accessory	配套附件Accessory	配套附件Accessory	配套附件Accessory
端板Cover Plate 厚度2.2mm Thickness2.2mm	灰Gray 橙Orange 蓝Blue	灰Gray 橙Orange 蓝Blue	灰Gray 橙Orange 蓝Blue
补偿端板Compensatory Plate 厚度1.00mm Thickness1.00mm	灰Gray	灰Gray	灰Gray
跨接件Jumper 位数Poles No. 2 3 4 ... 9 10	颜色Colour 黄Yellow 黄Yellow 黄Yellow 黄Yellow 黄Yellow	颜色Colour 黄Yellow 黄Yellow 黄Yellow 黄Yellow 黄Yellow	颜色Colour 黄Yellow 黄Yellow 黄Yellow 黄Yellow 黄Yellow
正面标记Front Marker 10位PCS	正面标记和侧面标记Front And Side Marker 可提供印字服务Printing Service	正面标记和侧面标记Front And Side Marker 可提供印字服务Printing Service	正面标记和侧面标记Front And Side Marker 可提供印字服务Printing Service