



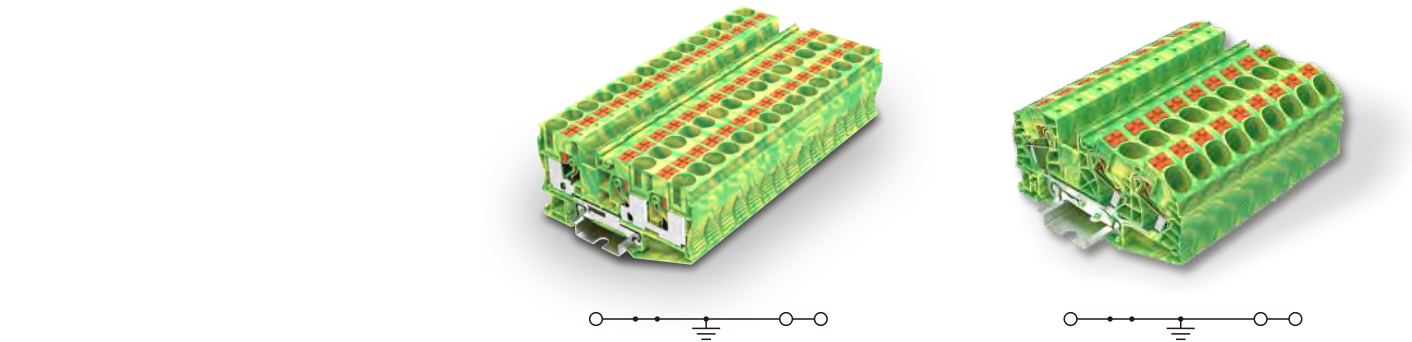

	10mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block	16mm² 一进两出接地端子 1-2 Feed Through Ground Terminal Block
	技术参数Technical Parameter	技术参数Technical Parameter
尺寸Size	厚度Thickness 10.2 宽度Width 88.9 高度Height 49.6 IEC UL 额定电压Rated Voltage * 额定电流Rated Current * 接线容量Wire Range 刚性Solid 0.5-16 柔性Fine Stranded 0.5-10 带冷压头Furrule 0.5-10 20-6	厚度Thickness 12.2 宽度Width 100.4 高度Height 52.6 IEC UL 额定电压Rated Voltage * 额定电流Rated Current * 接线容量Wire Range 刚性Solid 0.5-25 柔性Fine Stranded 0.5-16 带冷压头Furrule 0.5-16 20-4
其余参数Other Parameters	绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94 剥线长度Strip length 18	绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94 剥线长度Strip length 18
	订货信息Order Information	订货信息Order Information
产品Product	颜色Colour 黄绿Yellow green 适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5 *	订货号Order NO. TP10-3-PE * *
	配套附件Accessory	配套附件Accessory
端板Cover Plate	订货号Order NO. TP10-3-GY-EA TP10-3-OG-EA TP10-3-BU-EA	订货号Order NO. TP16-3-GY-EA TP16-3-OG-EA TP16-3-BU-EA
补偿端板Compensatory Plate	订货号Order NO. *	订货号Order NO. *
跨接件Jumper		
位数Poles No.	颜色Colour 黄Yellow 黄Yellow 黄Yellow ... 9 10	颜色Colour 黄Yellow 黄Yellow 黄Yellow ... 9 10
正面标记Front Marker	10位PCS TMB10.2-10	10位PCS TMB10.2-10
正面标记和侧面标记Front And Side Marker	可提供印字服务Printing Service TMB8.2-50	可提供印字服务Printing Service TMB10.2-10

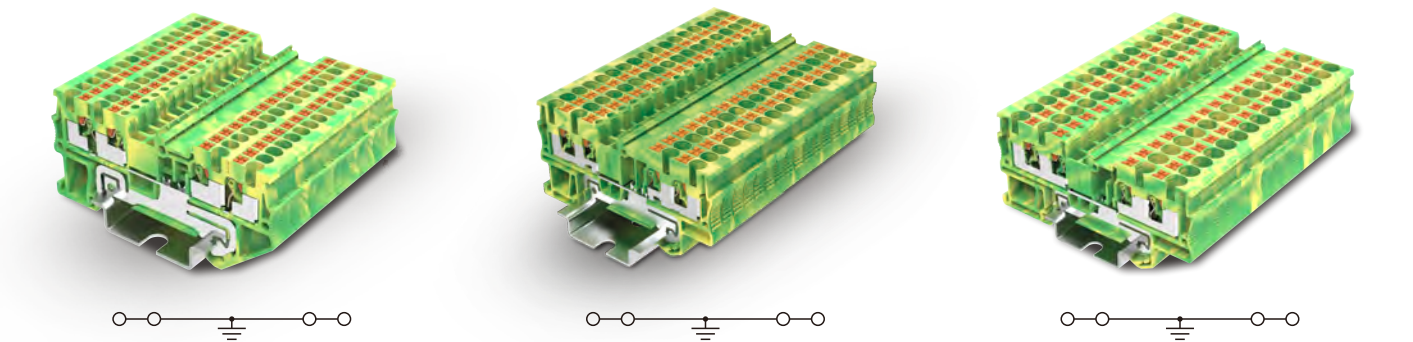

	1.5mm² 两进两出接地端子 2-2 Feed Through Ground Terminal Block	2.5mm² 两进两出接地端子 2-2 Feed Through Ground Terminal Block	4mm² 两进两出接地端子 2-2 Feed Through Ground Terminal Block
	技术参数Technical Parameter	技术参数Technical Parameter	技术参数Technical Parameter
厚度Thickness	3.5 宽度Width 65.2 高度Height 30.5 IEC UL 额定电压Rated Voltage * 额定电流Rated Current * 接线容量Wire Range 刚性Solid 0.2-1.5 柔性Fine Stranded 0.2-1.5 带冷压头Furrule 0.2-1.5 26-14	厚度Thickness 5.2 宽度Width 72.2 高度Height 35.3 IEC UL 额定电压Rated Voltage * 额定电流Rated Current * 接线容量Wire Range 刚性Solid 0.2-4 柔性Fine Stranded 0.2-2.5 带冷压头Furrule 0.2-2.5 26-12	厚度Thickness 6.2 宽度Width 77.7 高度Height 35.5 IEC UL 额定电压Rated Voltage * 额定电流Rated Current * 接线容量Wire Range 刚性Solid 0.2-6 柔性Fine Stranded 0.2-4 带冷压头Furrule 0.2-4 24-10
其余参数Other Parameters	绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94 剥线长度Strip length 8-9	绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94 剥线长度Strip length 8-10	绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94 剥线长度Strip length 8-10
	订货信息Order Information	订货信息Order Information	订货信息Order Information
产品Product	颜色Colour 黄绿Yellow green 适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5 *	颜色Colour 黄绿Yellow green 适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5 *	颜色Colour 黄绿Yellow green 适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5 *
	配套附件Accessory	配套附件Accessory	配套附件Accessory
端板Cover Plate	订货号Order NO. TP1.5-4-GY-EA TP1.5-4-OG-EA TP1.5-4-BU-EA	订货号Order NO. TC1.5-4-GY-EA TC1.5-4-OG-EA TC1.5-4-BU-EA	订货号Order NO. TP4-4-GY-EA TP4-4-OG-EA TP4-4-BU-EA
补偿端板Compensatory Plate	订货号Order NO. *	订货号Order NO. *	订货号Order NO. *
跨接件Jumper			
位数Poles No.	颜色Colour 黄Yellow 黄Yellow 黄Yellow ... 9 10	颜色Colour 黄Yellow 黄Yellow 黄Yellow ... 9 10	颜色Colour 黄Yellow 黄Yellow 黄Yellow ... 9 10
正面标记Front Marker	10位PCS TMB10.2-10	10位PCS TMB10.2-10	10位PCS TMB10.2-10
正面标记和侧面标记Front And Side Marker	可提供印字服务Printing Service TMB8.2-50	可提供印字服务Printing Service TMB10.2-10	可提供印字服务Printing Service TMB10.2-10