





1.5mm ² 双层接线端子 Double Level Terminal Block				1.5mm ² 双层等电位接线端子 Double Level Terminal Block			
技术参数Technical Parameter				技术参数Technical Parameter			
厚度Thickness		宽度Width	高度Height	厚度Thickness		宽度Width	高度Height
3.5		65.4	41.1	3.5		65.4	41.1
IEC		UL		IEC		UL	
500		600		500		600	
16		15		16		15	
刚性Solid		柔性Fine Stranded	带冷压头Furrule	刚性Solid		柔性Fine Stranded	带冷压头Furrule
0.2-1.5		0.2-1.5	0.2-1.5	0.2-1.5		0.2-1.5	0.2-1.5
26-14		26-14	26-14	26-14		26-14	26-14
V0				V0			
8-9				8-9			
订货信息Order Information				订货信息Order Information			
订货号Order NO.				订货号Order NO.			
TPD1.5-2-GY				TPD1.5-2-PV(黑色)			
TPD1.5-2-OG				*			
TPD1.5-2-BU				*			
配套附件Accessory				配套附件Accessory			
订货号Order NO.				订货号Order NO.			
TPD1.5-2-GY-EA				TPD1.5-2-GY-EA			
TPD1.5-2-OG-EA				TPD1.5-2-OG-EA			
TPD1.5-2-BU-EA				TPD1.5-2-BU-EA			
订货号Order NO.				订货号Order NO.			
*				*			
订货号Order NO.				订货号Order NO.			
TJA3.5-2				TJA3.5-2			
TJA3.5-3				TJA3.5-3			
TJA3.5-4				TJA3.5-4			
.....							
TJA3.5-9				TJA3.5-9			
TJA3.5-10				TJA3.5-10			
订货号Order NO.				订货号Order NO.			
*				*			
订货号Order NO.				订货号Order NO.			
TMB3.5-100				TMB3.5-100			

尺寸Size

注：安装NS35/7.5导轨后的高度
Note : Height With DIN Rail NS 35/7.5

[mm]

额定参数Rated Parameters

额定电压Rated Voltage

[V]

额定电流Rated Current

[A]

接线容量Wire Range

[mm²]

[AWG]

其余参数Other Parameters

绝缘材料/阻燃等级，符合UL94
Insulating Material / Flame Retardant Grade, Conforming To UL94

剥线长度Strip length

[mm]

产品Product

颜色Colour

灰Gray

橙Orange

蓝Blue

适配NS 35/7.5导轨
Can Be Used For DIN Rail NS 35/7.5

端板Cover Plate

灰Gray

橙Orange

蓝Blue

厚度2.2mm Thickness2.2mm

补偿端板Compensatory Plate

灰Gray

厚度1.00mm Thickness1.00mm

跨接件Jumper

位数Poles No.

颜色Colour

黄Yellow

黄Yellow

黄Yellow

.....

黄Yellow



黄Yellow

正面标记Front Marker

10位PCS

正面标记和侧面标记Front And Side Marker

可提供印字服务Printing Service

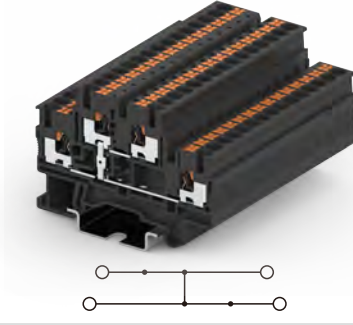

2.5mm ² 双层接线端子 Double Level Terminal Block			2.5mm ² 双层等电位接线端子 Double Level With Equipotential Bonder Terminal Block		
技术参数Technical Parameter			技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height	厚度Thickness	宽度Width	高度Height
5.2	68.2	45.8	5.2	68.2	45.8
IEC	UL		IEC	UL	
500	600		500	600	
16	15		16	15	
刚性Solid	柔性Fine Stranded	带冷压头Furrule	刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5	0.2-4	0.2-2.5	0.2-2.5
26-12	26-14	26-14	26-12	26-14	26-14
V0			V0		
8-10			8-10		
订货信息Order Information			订货信息Order Information		
订货号Order NO.			订货号Order NO.		
TPD2.5-2-GY			TPD2.5-2-PV (黑色)		
TPD2.5-2-OG			*		
TPD2.5-2-BU			*		
配套附件Accessory			配套附件Accessory		
订货号Order NO.			订货号Order NO.		
TPD2.5-2-GY-EA			TPD2.5-2-GY-EA		
TPD2.5-2-OG-EA			TPD2.5-2-OG-EA		
TPD2.5-2-BU-EA			TPD2.5-2-BU-EA		
订货号Order NO.			订货号Order NO.		
*			*		
订货号Order NO.			订货号Order NO.		
TJA5.2-2			TJA5.2-2		
TJA5.2-3			TJA5.2-3		
TJA5.2-4			TJA5.2-4		
.....					
TJA5.2-9			TJA5.2-9		
TJA5.2-10			TJA5.2-10		
订货号Order NO.			订货号Order NO.		
*			*		
订货号Order NO.			订货号Order NO.		
TMB5.2-120			TMB5.2-120		