



TC系列弹簧接线端子

TC Rail-mounted terminal blocks with spring-cage clamp



1.5mm² 双层等电位接地端子
Double Level With Equipotential Bonder
Ground Terminal Block

2.5mm² 双层等电位接地端子
Double Level With Equipotential Bonder
Ground Terminal Block

尺寸Size	
注：安装NS35/7.5导轨后的高度 Note：Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm ²]
	[AWG]
其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	68	43.4
IEC	UL	
500	600	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-1.5	0.2-1.5	0.2-1
26-14	26-14	18-14
V0		
10		

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	68	47.5
IEC	UL	
500	600	
*	*	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-4	0.2-2.5	0.2-2.5
24-12	24-12	24-12
V0		
10		

产品Product		颜色Colour
适配NS 35/7.5 NS 35/15导轨 Can Be Used For DIN Rail NS 35/7.5 NS35/15		黄绿Yellow green
		*
		*

订货信息Order Information	
订货号Order NO.	
TCD1.5-2-PE	
*	
*	

订货信息Order Information	
订货号Order NO.	
TCD2.5-2-PE	
*	
*	

端板Cover Plate		
		灰Gray
厚度2.2mm Thickness2.2mm		橙Orange
		蓝Blue

配套附件Accessory	
订货号Order NO.	
TCD1.5-2-GY-EA	
TCD1.5-2-OG-EA	
TCD1.5-2-BU-EA	

配套附件Accessory	
订货号Order NO.	
TCD2.5-2-GY-EA	
TCD2.5-2-OG-EA	
TCD2.5-2-BU-EA	

补偿端板Compensatory Plate		
厚度1.00mm Thickness1.00mm		灰Gray

订货号Order NO.	
*	

订货号Order NO.	
*	

跨接件Jumper		
位数Poles No.		颜色Colour
2		黄Yellow
3		黄Yellow
4		黄Yellow
...		
9		黄Yellow
10		黄Yellow


Imax/24A	
订货号Order NO.	
*	
*	
*	
.....	
*	
*	

订货号Order NO.	
*	
*	
*	
.....	
*	
*	

安全警告标记 Protective Warning Marker		
5位PCS		
正面标记Front Marker		
10位PCS		
正面标记和侧面标记Front And Side Marker		
可提供印字服务Printing Service		

订货号Order NO.	
*	
订货号Order NO.	
*	
订货号Order NO.	
TMB3.5-100	

订货号Order NO.	
TMD5.2-5	
订货号Order NO.	
*	
订货号Order NO.	
TMB5.2-120	

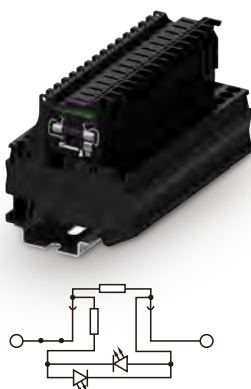

4mm² 带保险管接线端子
Terminal Block With Protective Tube

4mm² 带发光二极管保险管接线端子
Terminal Block With LED Protective Tube

4mm²断开式接线端子
Terminal Block With Protective Tube

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	61.5	63.15
IEC	UL	
500	300	
6.3	10	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-4	0.2-4
24-10	24-10	24-10
V0		
10		

订货信息Order Information	
订货号Order NO.	
TC4-FUSE-BK(黑色)	
*	
*	
配套附件Accessory	
订货号Order NO.	
*	
*	
*	
订货号Order NO.	
*	

Imax/24A	
订货号Order NO.	
TJA6.2-2	
TJA6.2-3	
TJA6.2-4	
.....	
TJA6.2-9	
TJA6.2-10	
订货号Order NO.	
*	
订货号Order NO.	
*	

订货号Order NO.	
TMB6.2-100	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	61.5	63.15
IEC	UL	
500	300	
6.3	10	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-4	0.2-4
24-10	24-10	24-10
V0		
10		

订货信息Order Information	
订货号Order NO.	
TC4-FUSELED24-BK(黑色)	
*	
*	
配套附件Accessory	
订货号Order NO.	
*	
*	
*	
订货号Order NO.	
*	

Imax/24A	
订货号Order NO.	
TJA6.2-2	
TJA6.2-3	
TJA6.2-4	
.....	
TJA6.2-9	
TJA6.2-10	
订货号Order NO.	
*	
订货号Order NO.	
*	

订货号Order NO.	
TMB6.2-100	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
6.2	61.5	63.15
IEC	UL	
500	300	
6.3	10	
刚性Solid	柔性Fine Stranded	带冷压头Furrule
0.2-6	0.2-4	0.2-4
24-10	24-10	24-10
V0		
10		

订货信息Order Information	
订货号Order NO.	
TC4-SPLIT	
*	
*	
配套附件Accessory	
订货号Order NO.	
*	
*	
*	
订货号Order NO.	
*	

Imax/24A	
订货号Order NO.	
TJA6.2-2	
TJA6.2-3	
TJA6.2-4	
.....	
TJA6.2-9	
TJA6.2-10	
订货号Order NO.	
*	
订货号Order NO.	
*	

订货号Order NO.	
TMB6.2-100	