



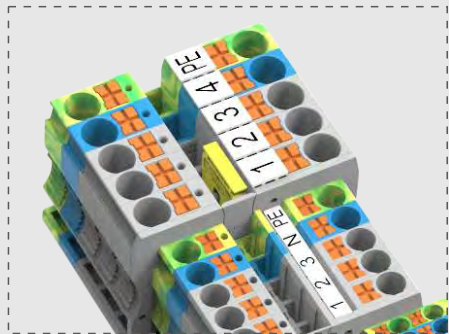


▲ 带辅助按键，无需特定工具，不接触带电部件

▲ With the press key, no special tools are required and no live parts are touched

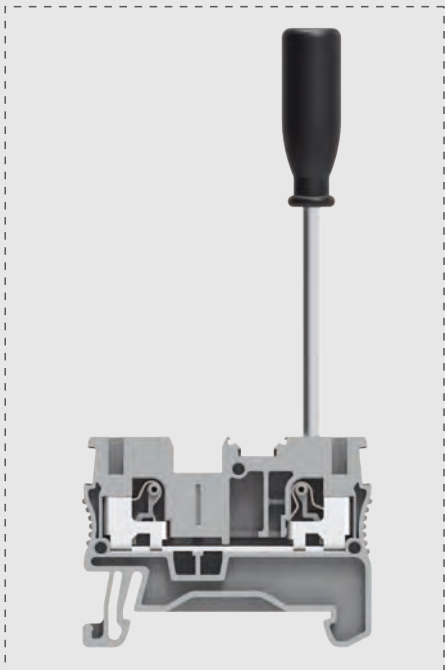


▲ 按下辅助按键即可打开弹簧，接入柔性导线

▲ Inserting the flexible conductor via the press key

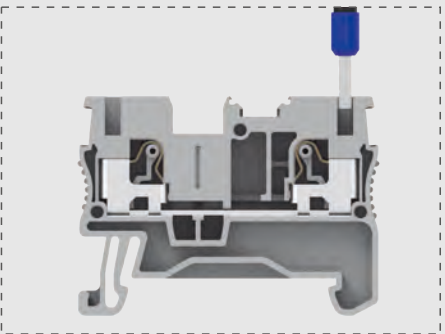

▲ 线径0.2 mm²以上的刚性导线或带0.34 mm²以上冷压头的导线可直接接入

▲ The solid wire $\geq 0.25\text{mm}^2$ and the wire with ferrule $\geq 0.34\text{mm}^2$ can be inserted directly

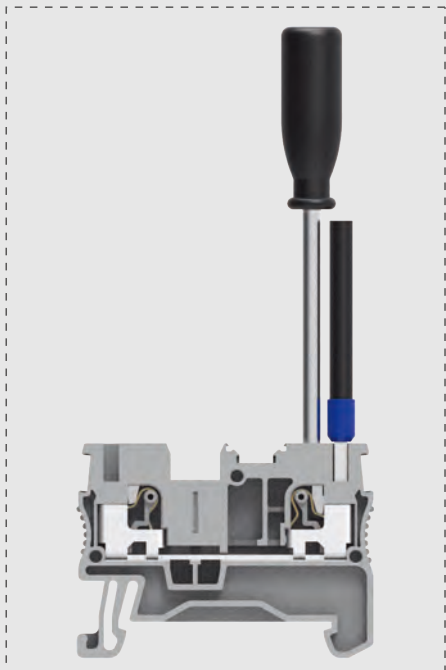


▲ 按下辅助按键，即可退线

▲ Removing the conductor via the press key

TP系列弹簧接线端子

TP Rail-mounted terminal blocks with spring-cage clamp



1.5mm² 一进一出接线端子 1-1 Feed Through Terminal Block

技术参数Technical Parameter	
尺寸Size	
注：安装NS35/7.5导轨后的高度 Note : Height With DIN Rail NS 35/7.5	[mm]
额定参数Rated Parameters	
额定电压Rated Voltage	[V]
额定电流Rated Current	[A]
接线容量Wire Range	
	[mm ²]
	[AWG]

其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

产品Product	颜色Colour
适配NS 35/7.5导轨 Can Be Used For DIN Rail NS 35/7.5	灰Gray
	橙Orange
	蓝Blue

端板Cover Plate	
厚度2.2mm Thickness2.2mm	灰Gray 橙Orange 蓝Blue

补偿端板Compensatory Plate	
厚度1.00mm Thickness1.00mm	灰Gray

跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
4	黄Yellow
...	
9	黄Yellow
10	黄Yellow

正面标记Front Marker	
10位PCS	

正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	

2.5mm² 一进一出接线端子 1-1 Feed Through Terminal Block

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
3.5	48	30.5
IEC	UL	
500	600	
17.5	15	
刚性Solid	柔性Fine Stranded	带冷压头Ferrule
0.2-1.5	0.2-1.5	0.2-1.5
26-14	26-14	26-14

其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

订货信息Order Information	
订货号Order NO.	
TP1.5-2-GY	
TP1.5-2-OG	
TP1.5-2-BU	

配套附件Accessory	
订货号Order NO.	
TP1.5-2-GY-EA	
TP1.5-2-OG-EA	
TP1.5-2-BU-EA	

补偿端板Compensatory Plate	
厚度1.00mm Thickness1.00mm	灰Gray

跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
4	黄Yellow
...	
9	黄Yellow
10	黄Yellow

正面标记Front Marker	
10位PCS	

正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	

技术参数Technical Parameter		
厚度Thickness	宽度Width	高度Height
5.2	48.2	35.2
IEC	UL	
800	600	
24	20	
刚性Solid	柔性Fine Stranded	带冷压头Ferrule
0.2-4	0.2-2.5	0.2-2.5
26-12	26-12	26-12

其余参数Other Parameters	
绝缘材料/阻燃等级，符合UL94 Insulating Material / Flame Retardant Grade, Conforming To UL94	
剥线长度Strip length	[mm]

订货信息Order Information	
订货号Order NO.	
TP2.5-2-GY	
TP2.5-2-OG	
TP2.5-2-BU	

配套附件Accessory	
订货号Order NO.	
TP2.5-2-GY-EA	
TP2.5-2-OG-EA	
TP2.5-2-BU-EA	

补偿端板Compensatory Plate	
厚度1.00mm Thickness1.00mm	灰Gray

跨接件Jumper	
位数Poles No.	颜色Colour
2	黄Yellow
3	黄Yellow
4	黄Yellow
...	
9	黄Yellow
10	黄Yellow

正面标记Front Marker	
10位PCS	

正面标记和侧面标记Front And Side Marker	
可提供印字服务Printing Service	