



T3020-1

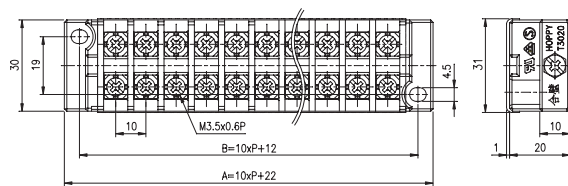

定格 Rating	AC300V 20A
適合電線 Applicable Wire	2mm ²
本体材質 Body Material	Phenolic
連接方式 Connection	M3.5 Screw- M3.5 Screw

極數 P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
全長 A	32	42	52	62	72	82	92	102	112	122	132	142	152	162	172	182
固定孔 B	22	32	42	52	62	72	82	92	102	112	122	132	142	152	162	172


T3020-2

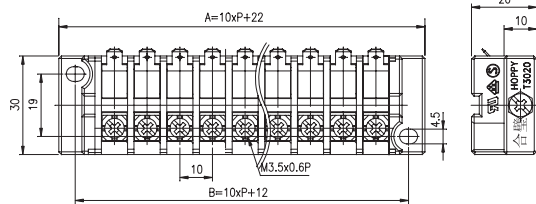

定格 Rating	AC200V 15A
適合電線 Applicable Wire	1.25mm ²
本体材質 Body Material	Phenolic
連接方式 Connection	M3.5 Screw- #187Tab

極數 P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
全長 A	32	42	52	62	72	82	92	102	112	122	132	142	152	162	172	182
固定孔 B	22	32	42	52	62	72	82	92	102	112	122	132	142	152	162	172

T3020-3

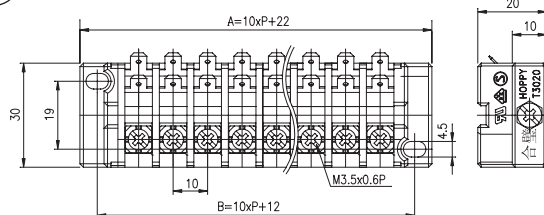

定格 Rating	AC200V 15A
適合電線 Applicable Wire	1.25mm ²
本体材質 Body Material	Phenolic
連接方式 Connection	M3.5 Screw- #187Tab(Twin)

極數 P	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
全長 A	32	42	52	62	72	82	92	102	112	122	132	142	152	162	172	182
固定孔 B	22	32	42	52	62	72	82	92	102	112	122	132	142	152	162	172

組立成品訂購方式
Product Numbering


■: 數字(一位)
□: 數字(多位)

T3020-□-□P-CL0

空白銘板Blank Marking Plate
透明蓋Cover
極數Pole
機型1/2/3
型號 Part No

PR3-129-□P

T3020短路片
T3020Short Plate



極數 Pole	P	2	3
長度 Length	A	16.7	26.7
長度 Length	B	10	20

PR3-30-90

T3020 短路片
T3020 Short Plate

