






T4114S-□P(PA9)

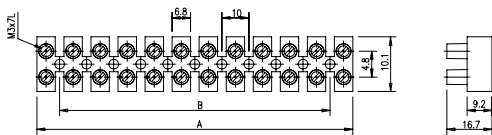

P 數	1P	2P	3P	4P	5P	6P	7P	8P	9P	10P	11P	12P
A	(6.8)	(16.8)	(26.8)	(36.8)	(46.8)	(56.8)	(66.8)	(76.8)	(86.8)	(96.8)	(106.8)	(116.8)
B	-	-	10	20	30	40	50	60	70	80	90	100

定 格 Rating	600V 30A
適合電線 Applicable Wire	3.5mm ²
本体材質 Body Material	PA 66
連接方式 Connection	M3 Screw- M3 Screw

T4106-1-□P

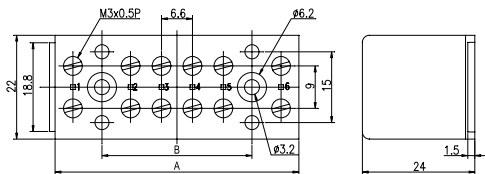

定 格 Rating	AC300V 30A
適合電線 Applicable Wire	3.5mm ²
本体材質 Body Material	PA 66
連接方式 Connection	M3 Screw- M3 Screw

極數	P	2	4	6
全長	A	20	39	52
固定孔距	B	12.4	18.8	32