

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色.

Housing: LCP+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 7 AMP

Rating Current: 7 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperature Range: -40°C to +105°C

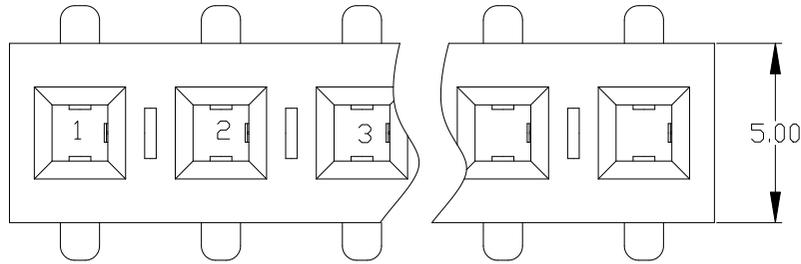

Ordering Information

F789-11 XX XX D MU A X

NO. OF PINS PER ROW 1-30P	Contact Plating		INSULATOR MATERIAL: D: LCP	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
	Full Of Gold	Semi-gold		
A0=0.8u"	B0=0.8u"			
A1=1u"	B1=1u"			
A2=1.5u"	B2=1.5u"			
A3=2u"	B3=2u"			
A4=3u"	B4=3u"			
A5=5u"	B5=5u"			
A6=10u"	B6=10u"			
A7=15u"	B7=15u"			
A8=20u"	B8=20u"			
A9=30u"	B9=30u"			
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

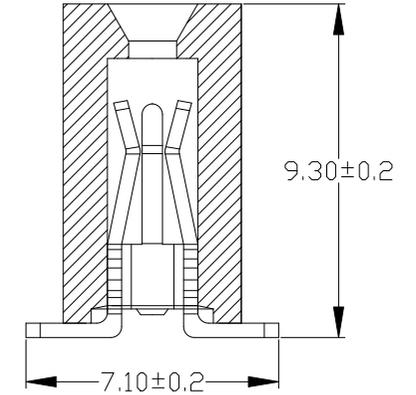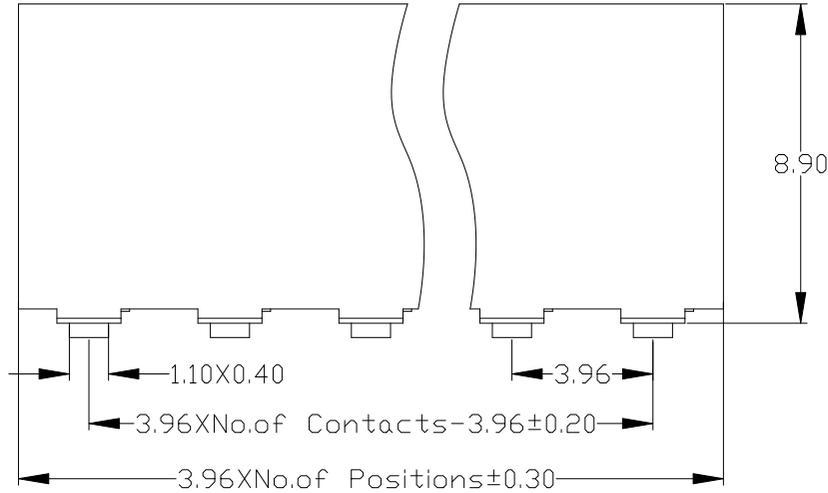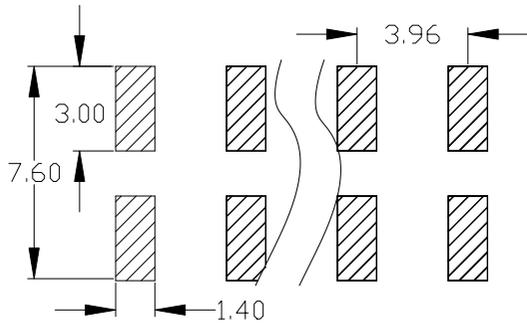

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit		上海高霖电子有限公司		
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F789-11XXXXMUX1	
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	3.96mm 单排母 塑高8.9 SMT	
					Angle	±3°	PROJ.	☉	APPROVE		Customer No.		
					DIM	TOL							