


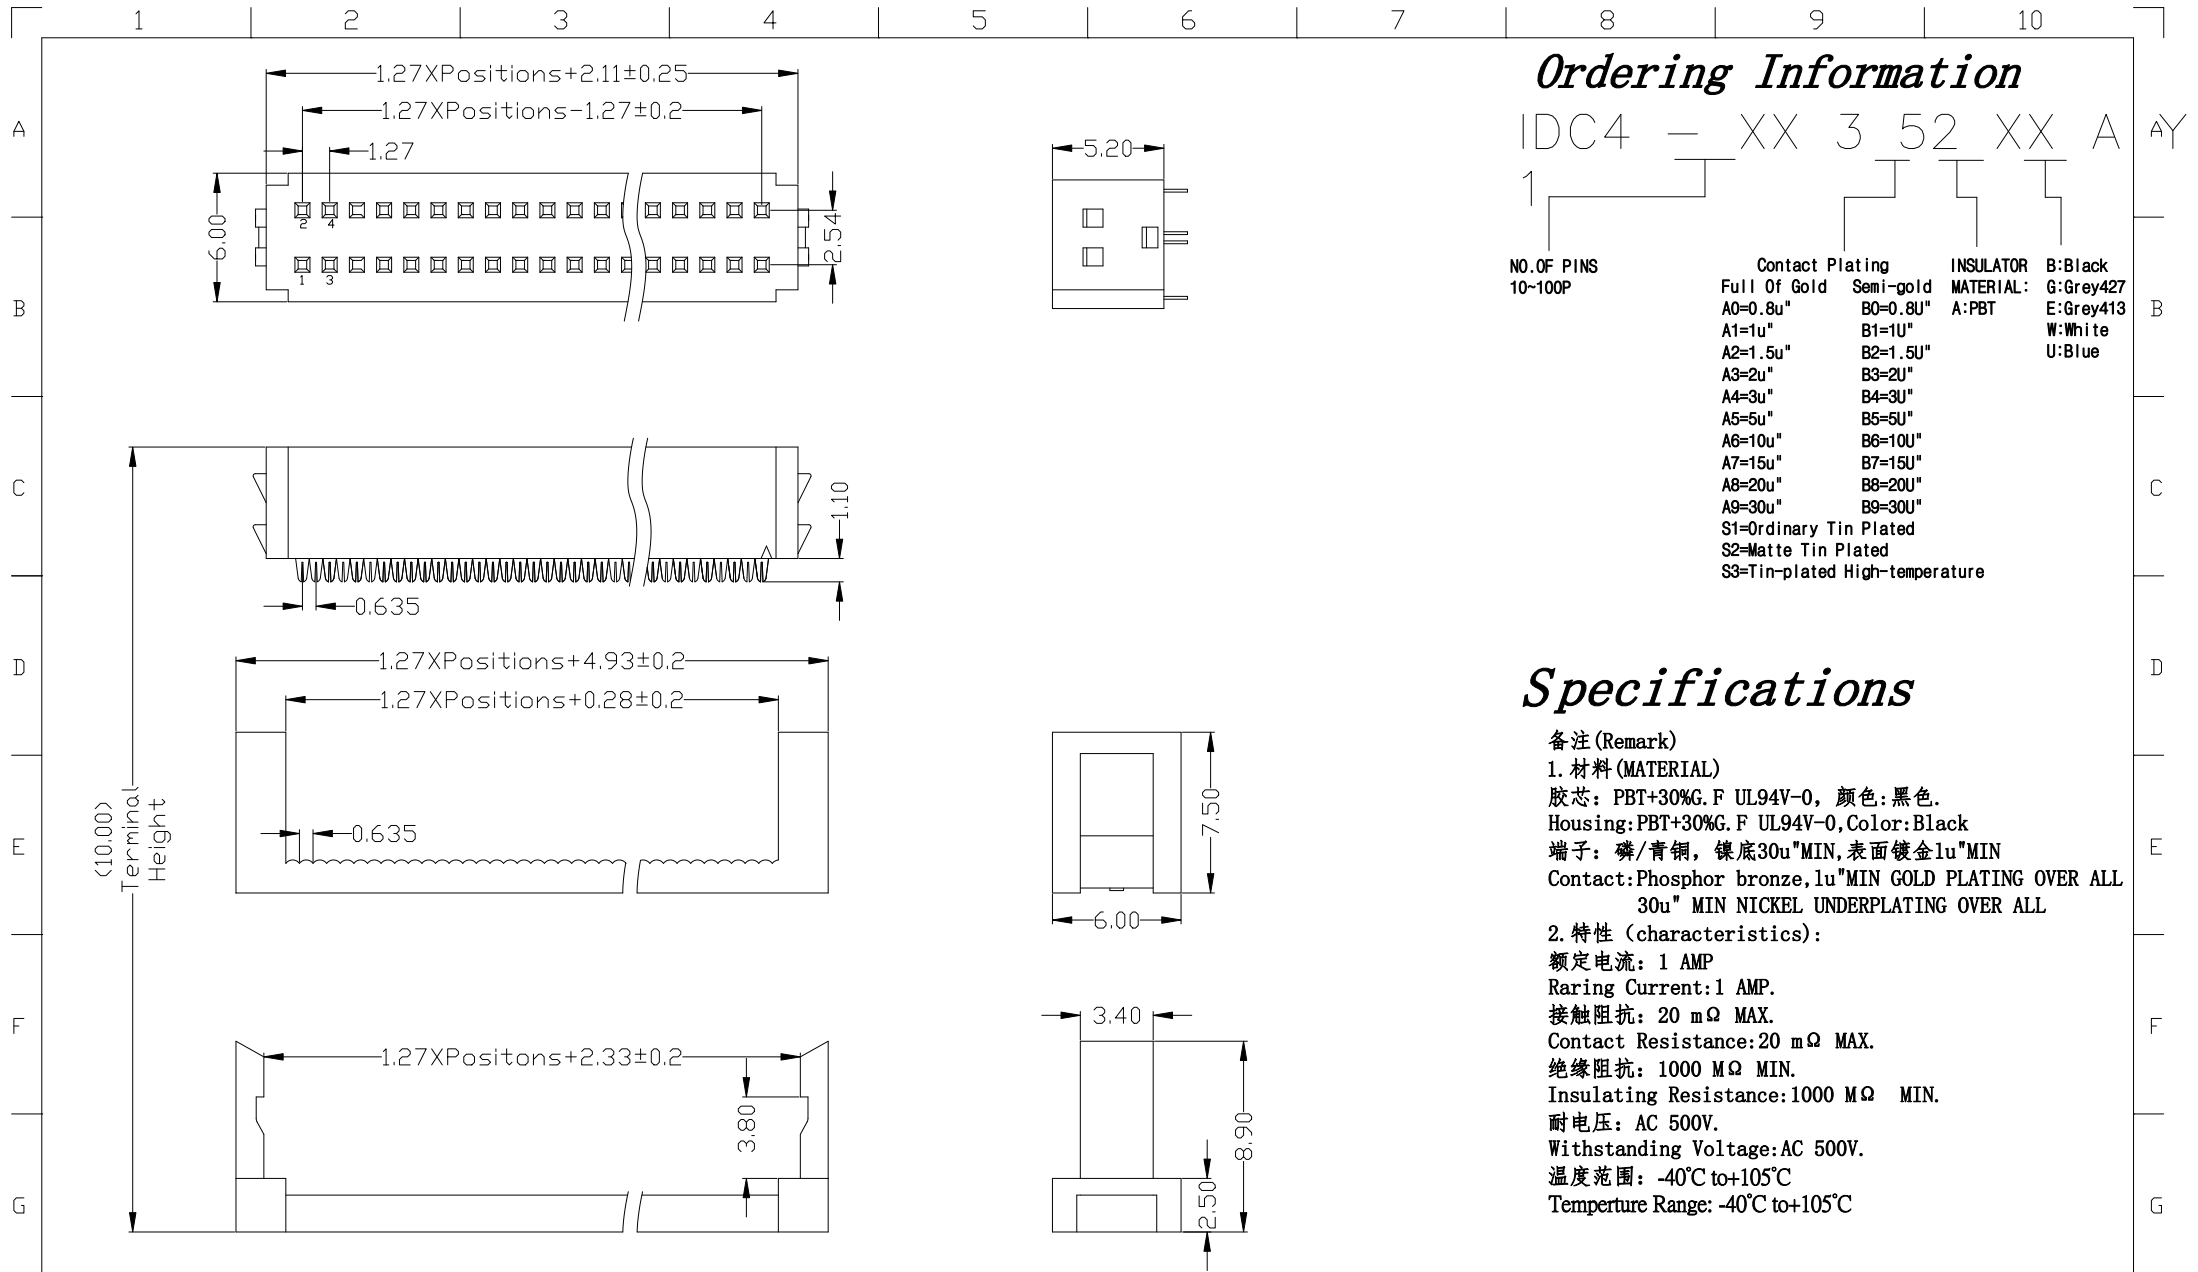

Ordering Information

IDC4 - XX 3 52 XX A AY

NO. OF PINS
10-100P

Contact Plating

Full Of Gold Semi-gold

A0=0.8u" B0=0.8U"

A1=1u" B1=1U"

A2=1.5u" B2=1.5U"

A3=2u" B3=2U"

A4=3u" B4=3U"

A5=5u" B5=5U"

A6=10u" B6=10U"

A7=15u" B7=15U"

A8=20u" B8=20U"

A9=30u" B9=30U"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

INSULATOR MATERIAL:

A:PBT B:Black

G:Grey427

E:Grey413

W:White

U:Blue

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

上海高霖电子有限公司

卢小强

PART NO.

IDC4-XX252XXAYX1

TITLE:

1. 27*2.54 IDC 塑高5.2 Y型 三件式 无凸点

Customer No.

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4


1/1

⌀

APPROVE

APPROVE

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
1				
2				
3				
4				

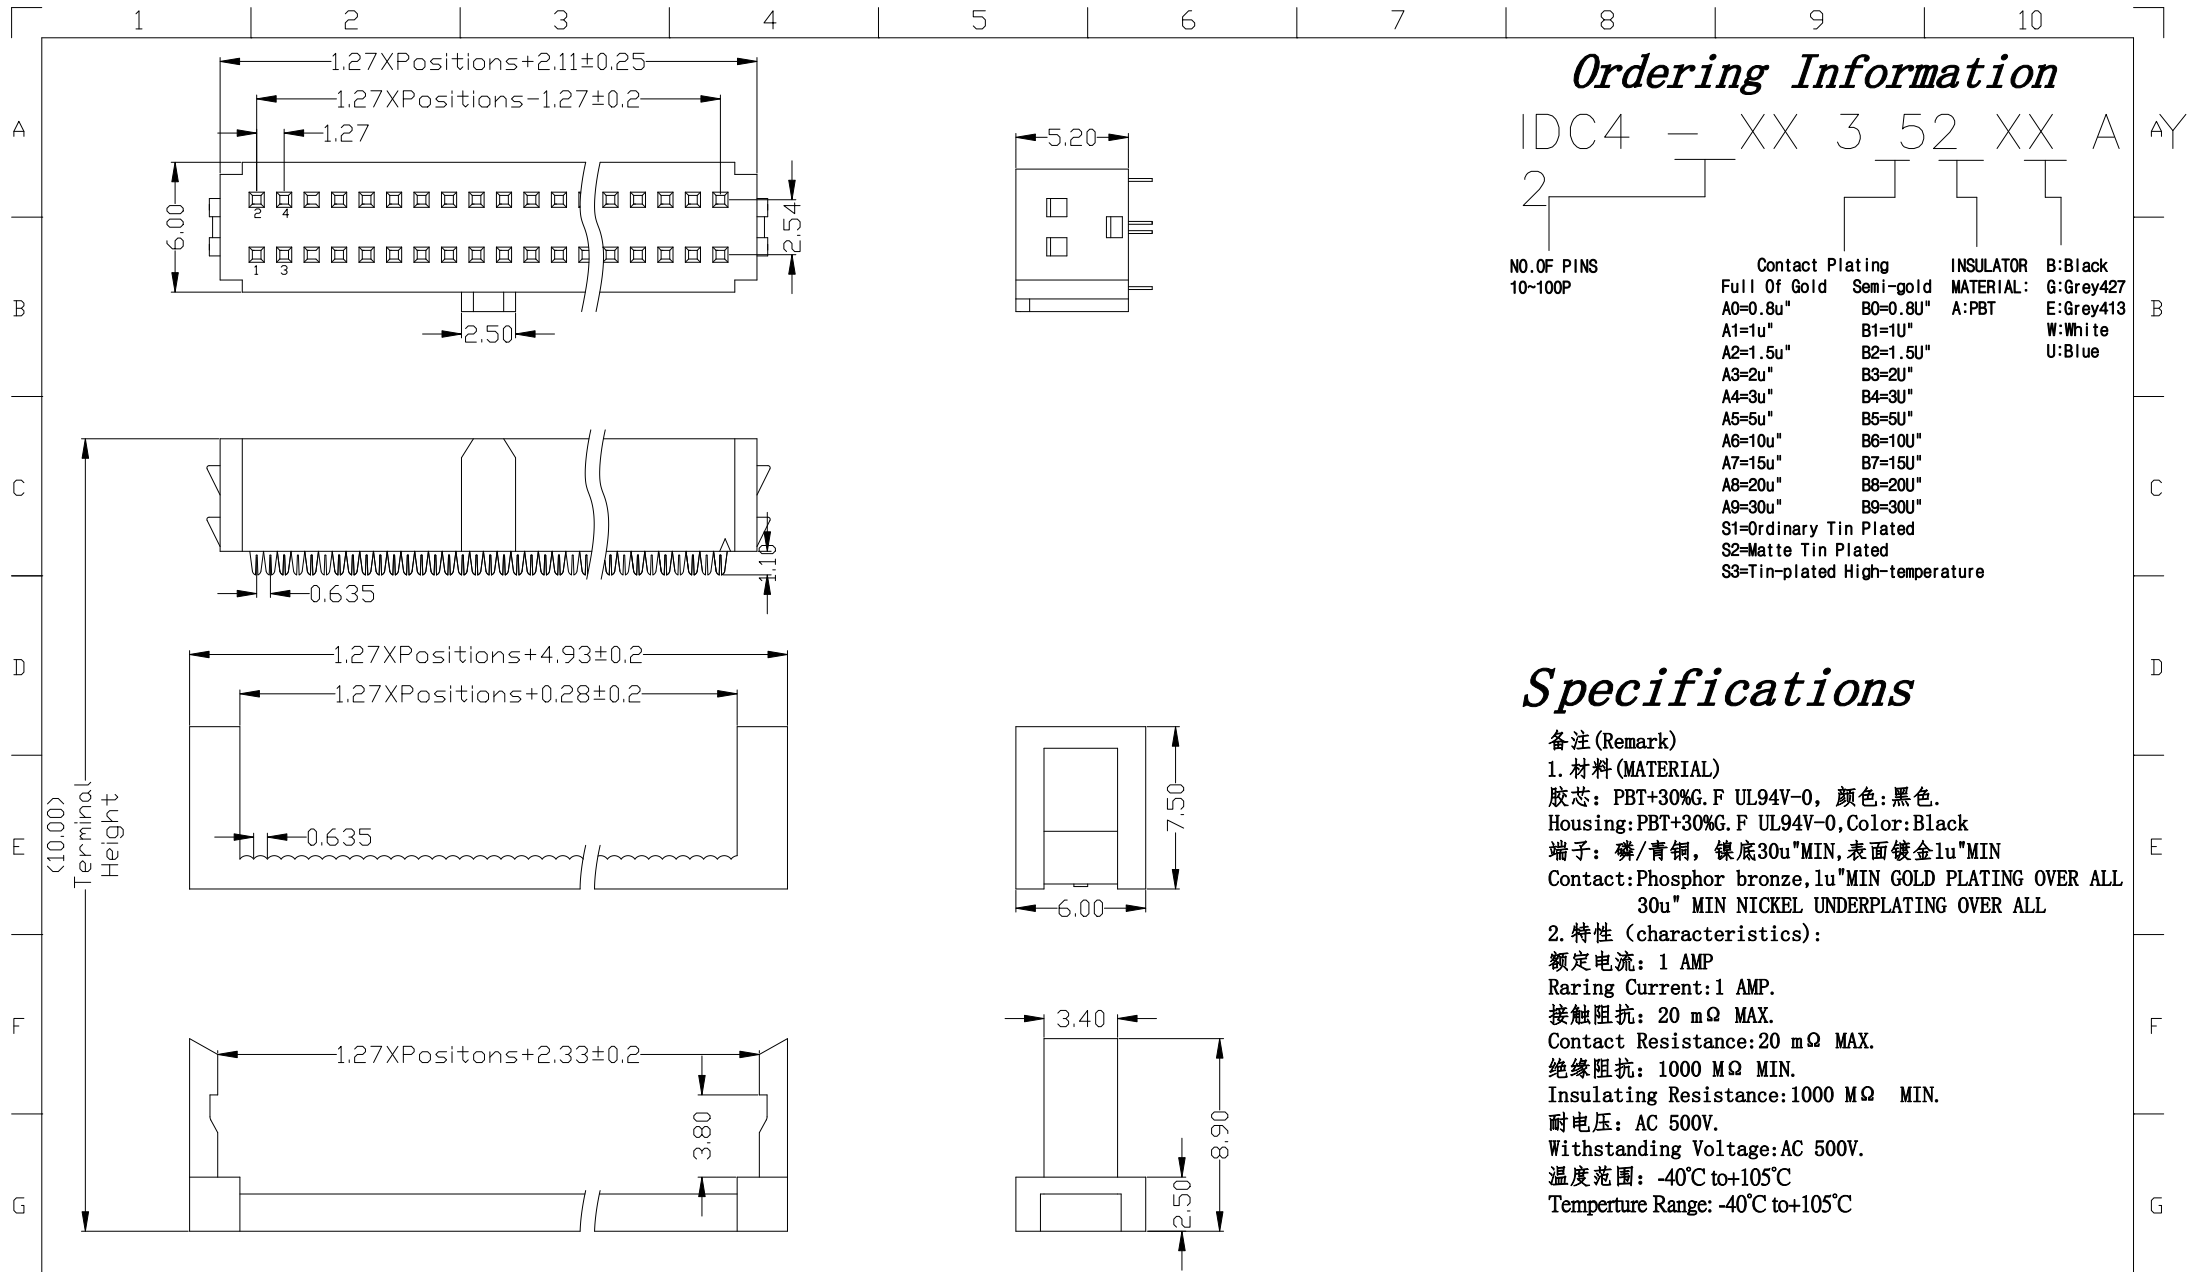

Ordering Information					
IDC4	-	XX	3	52	XX A AY
2					
NO. OF PINS 10~100P		Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u" S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature		INSULATOR MATERIAL: A:PBT B:Black G:Grey427 E:Grey413 W:White U:Blue	

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PBT+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镀底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

					OPERATION		SCALE		Fit	上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强		PART NO.	IDC4-XX252XXAYX2
					X.XXX	±0.10	SHEET	1/1	CHECK			TITLE:	1. 27*2.54 IDC 塑高5.2 Y型 三件式 带凸点
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	PROJ.	⌀	APPROVE			Customer No.	
1		2	3	4			5	6	7	8	9	10	