

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Brass, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.






Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

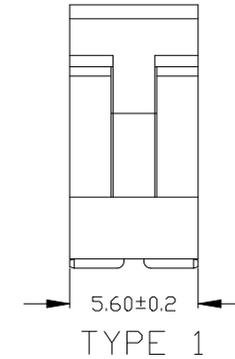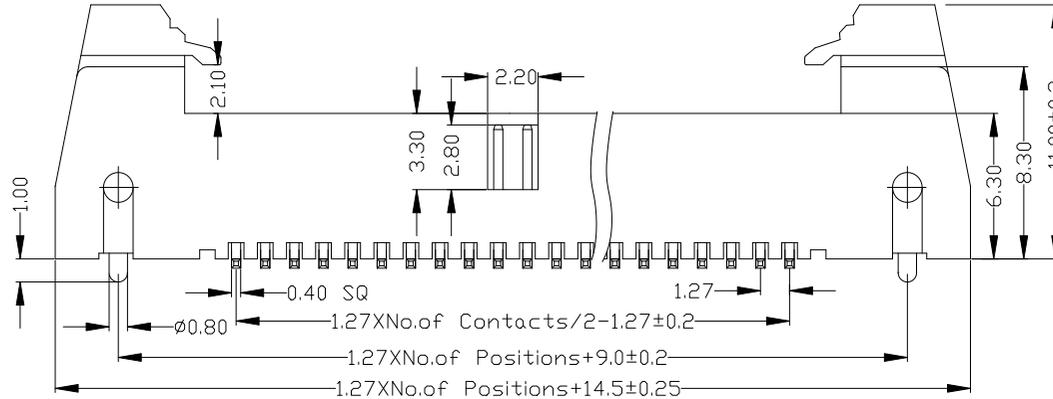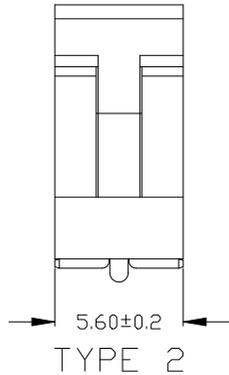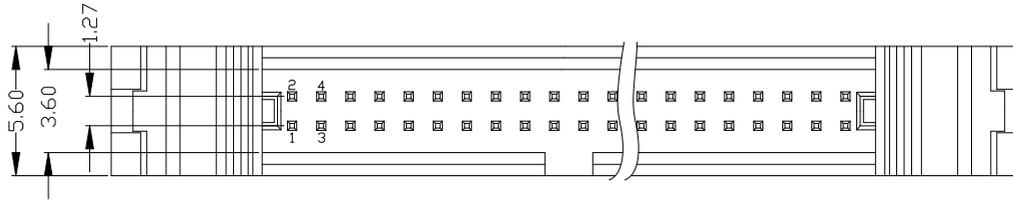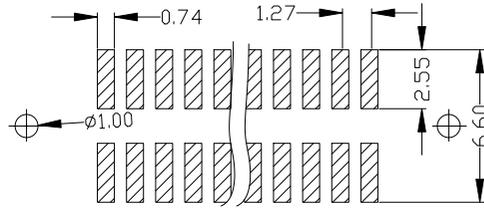

Ordering Information

E302-1 XX XX X M X X A X

NO. OF PINS 6-64P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u" S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	INSULATOR MATERIAL: B: PA6T C: PA9T D: LCP	B: Black G: Grey427 E: Grey413 W: White U: Blue	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray	1: TYPE1 2: TYPE2
----------------------	--	---	---	---	---	----------------------

OPERATION		SCALE		Fit	
X.X	±0.25	UNIT		MM	
X.XX	±0.20	SIZE	A4	DESIGN	卢小强
X.XXX	±0.10	SHEET	1/1	CHECK	PART NO.
Angle	±3°	PROJ.	1/1	APPROVE	TITLE:
DIM	TOL			Customer No.	

上海高霖电子有限公司

卢小强 PART NO. E302-1XXXXXX
CHECK TITLE: 1.27X1.27牛角 SMT 短耳

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE