

# Specifications

备注(Remark)

## 1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色:黑色.

Housing:PA6T+30%G.F UL94V-0,Color:Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact:Brass,0.8u"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

## 2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current:1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance:20mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance:1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage:AC 500V.

温度范围: -40°C to+105°C




Temperture Range: -40°C to+105°C

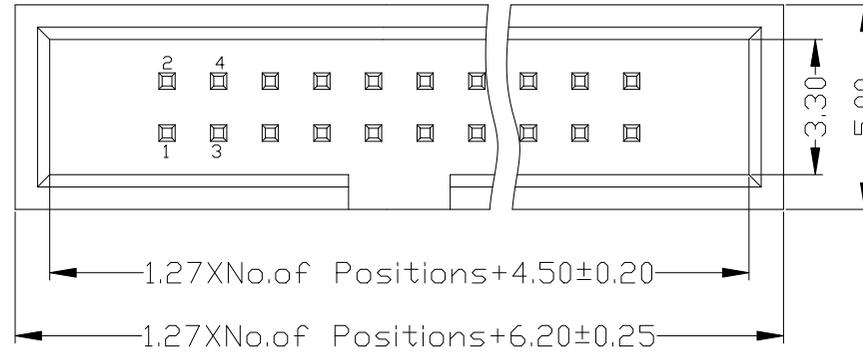

# Ordering Information

B349-1 XX XX X S X X

NO.OF PINS 4-100P	Contact Plating	INSULATOR MATERIAL:	B:Black G:Grey427 E:Grey413 W:White U:Blue	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
A0=0.8u"	Full Of Gold	Semi-gold	B:PA6T C:PA9T D:LCP	
A1=1u"		B0=0.8U"		
A2=1.5u"		B1=1U"		
A3=2u"		B2=1.5U"		
A4=3u"		B3=2U"		
A5=5u"		B4=3U"		
A6=10u"		B5=5U"		
A7=15u"		B6=10U"		
A8=20u"		B7=15U"		
A9=30u"		B8=20U"		
		B9=30U"		
		S1=Ordinary Tin Plated		
		S2=Matte Tin Plated		
		S3=Tin-plated High-temperature		

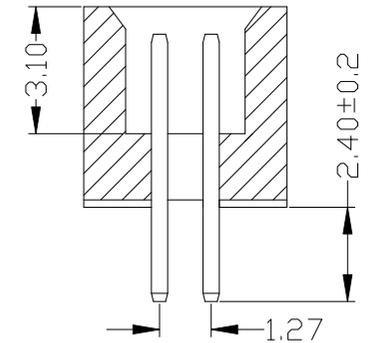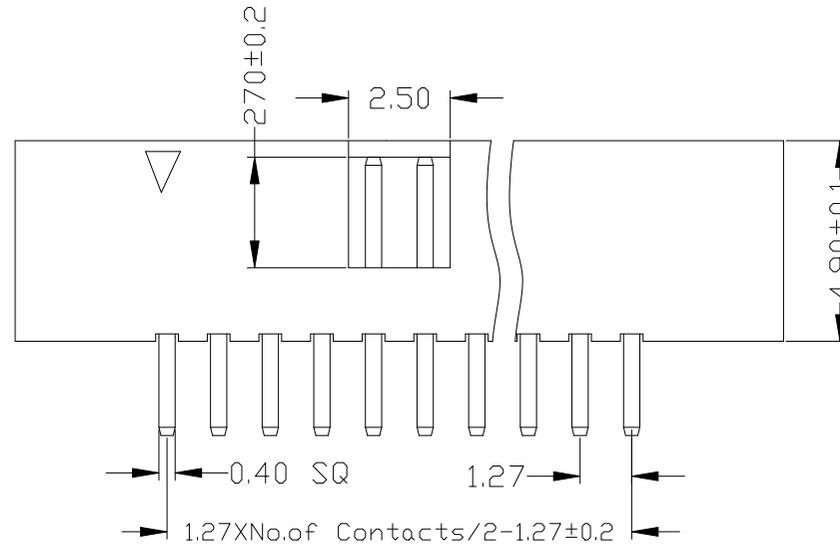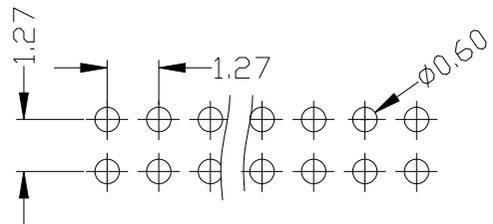

上海高霖电子有限公司

				OPERATION		SCALE		Fit		上海高霖电子有限公司 卢小强 PART NO. B349-1XXXXXSXX1 TITLE: 1.27mm 筒牛 塑高4.9 180度 Customer No.		
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN				
				X.XXX	±0.10	SHEET	1/1	CHECK				
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE			

# Specifications

备注(Remark)

## 1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

## 2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C




Temperature Range: -40°C to+105°C

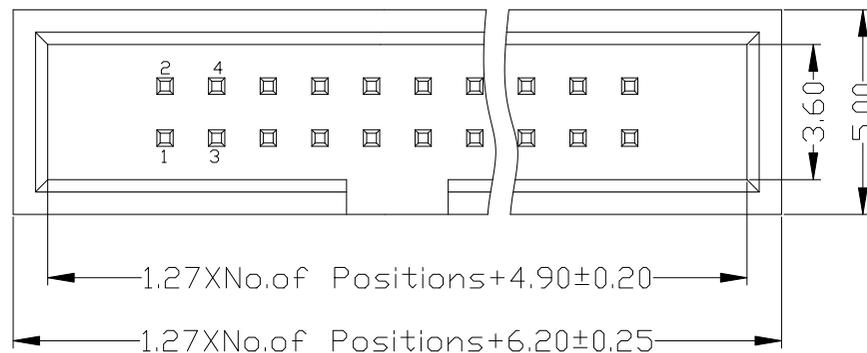

# Ordering Information

B355-1 XX XX X S X X

NO. OF PINS 4-100P	Contact Plating	INSULATOR MATERIAL:	B: Black G: Grey427 E: Grey413 W: White U: Blue	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
A0=0.8u"	Full Of Gold	B: PA6T C: PA9T D: LCP		
A1=1u"	Semi-gold			
A2=1.5u"	B0=0.8U"			
A3=2u"	B1=1U"			
A4=3u"	B2=1.5U"			
A5=5u"	B3=2U"			
A6=10u"	B4=3U"			
A7=15u"	B5=5U"			
A8=20u"	B6=10U"			
A9=30u"	B7=15U"			
	B8=20U"			
	B9=30U"			
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

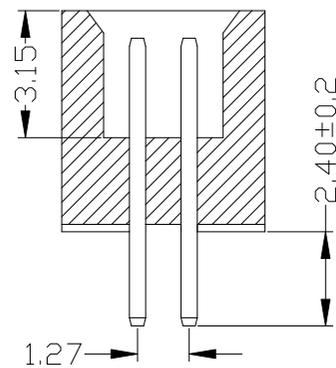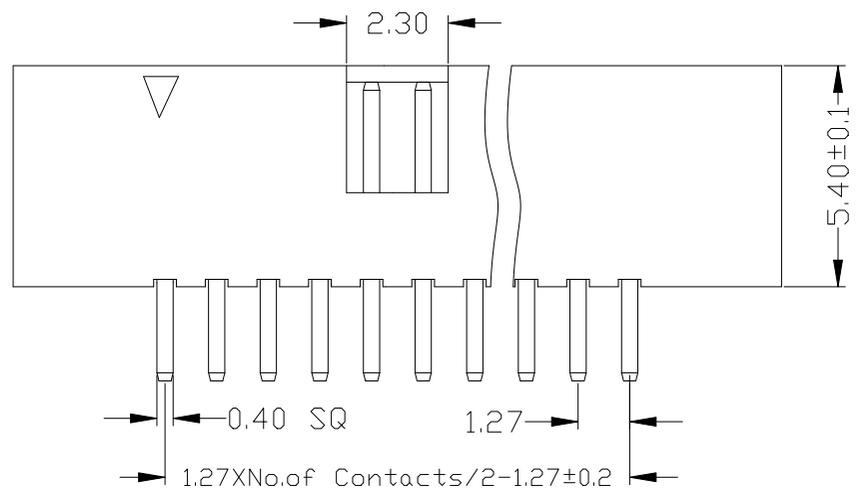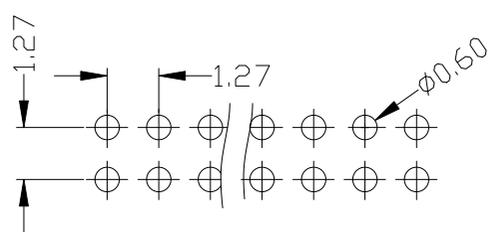

				OPERATION		SCALE		Fit		<h2 style="margin: 0;">上海高霖电子有限公司</h2>						
				X.X	$\pm 0.25$	UNIT		MM								
				X.XX	$\pm 0.20$	SIZE	A4	DESIGN	卢小强					PART NO.	B355-1XXXXXSXX1	
				X.XXX	$\pm 0.10$	SHEET	1/1	CHECK						TITLE:	1.27mm 筒牛 塑高5.4 180度	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE	Customer No.					