

Specifications

备注 (Remark)




1. 材料 (MATERIAL)

胶芯: PBT+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PBT+30%G.F UL94V-0, Color: Black
 端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL


2. 特性 (characteristics):

额定电流: 1 AMP
 Raring Current: 1 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to +105°C
 Temperature Range: -40°C to +105°C

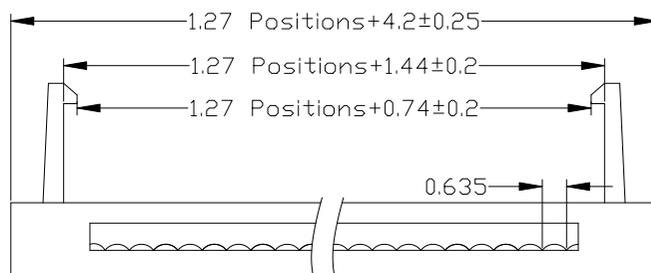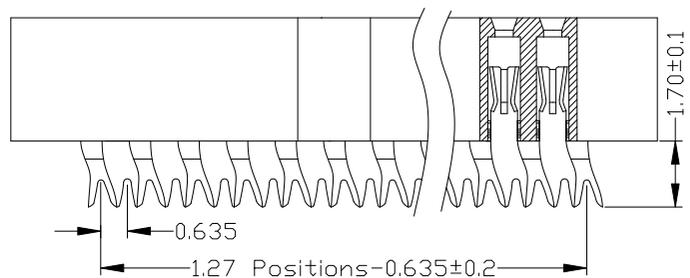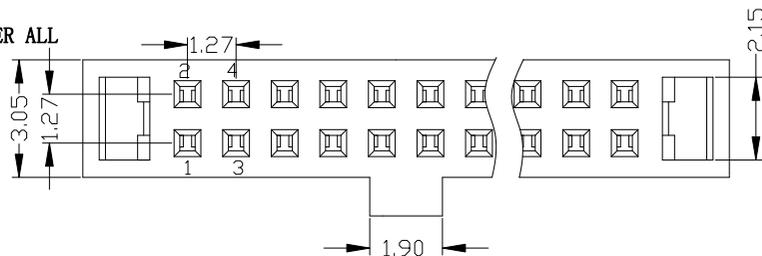


Ordering Information

IDC3 - XX 2 32 XX A



Contact Plating		INSULATOR MATERIAL:	B: Black
Full Of Gold	Semi-gold	A: PBT	G: Grey427
A0=0.8u"	B0=0.8U"		E: Grey413
A1=1u"	B1=1U"		W: White
A2=1.5u"	B2=1.5U"		U: Blue
A3=2u"	B3=2U"		
A4=3u"	B4=3U"		
A5=5u"	B5=5U"		
A6=10u"	B6=10U"		
A7=15u"	B7=15U"		
A8=20u"	B8=20U"		
A9=30u"	B9=30U"		
S1=Ordinary Tin Plated			
S2=Matte Tin Plated			
S3=Tin-plated High-temperature			



上海高霖电子有限公司

				OPERATION		SCALE		Fit		上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	IDC3-XX232XXAUX2		
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.27 IDC 塑高3.2 U型 两件式 带凸点		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.			
					DIM	TOL							

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Rating Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.



Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

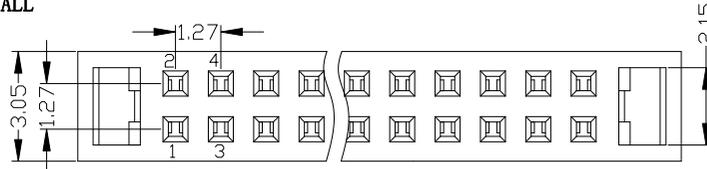

Ordering Information

IDC3 - XX 2 32 XX A U

NO. OF PINS
6-80P

Contact Plating
Full Of Gold

Semi-gold

INSULATOR
MATERIAL:

B: Black
G: Grey427

A0=0.8u"

B0=0.8U"

E: Grey413

A1=1u"

B1=1U"

W: White

A2=1.5u"

B2=1.5U"

U: Blue

A3=2u"

B3=2U"

A4=3u"

B4=3U"

A5=5u"

B5=5U"

A6=10u"

B6=10U"

A7=15u"

B7=15U"

A8=20u"

B8=20U"



A9=30u"

B9=30U"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

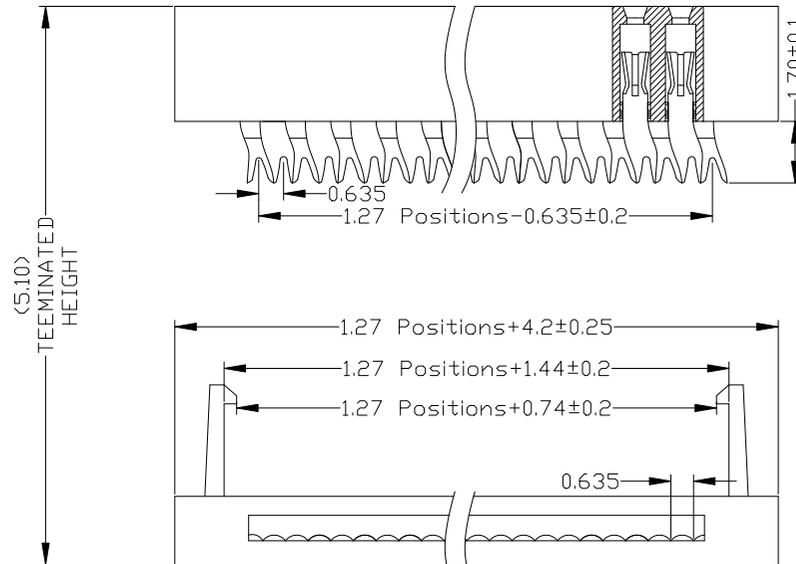

				OPERATION		SCALE		Fit		上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	IDC3-XX232XXAUX1		
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.27 IDC 塑高3.2 U型 两件式 无凸点		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.			