


Specifications




备注(Remark)
1. 材料(MATERIAL)
胶芯: PA6T+30%G. F UL94V-0, 颜色:黑色.
Housing:PA6T+30%G. F UL94V-0,Color:Black
四方针: 黄铜, 镍底30u"MIN,表面镀金0.8u"MIN
Contact:Brass,0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 3 AMP
Raring Current:3 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance:20 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance:1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage:AC 500V.
温度范围: -40℃ to+105℃
Temperture Range: -40℃ to+105℃

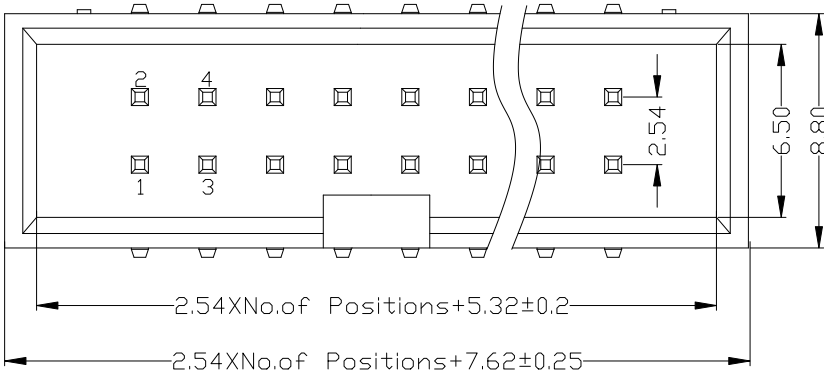

Ordering Information

B190-1 XX XX X M X XA 1

NO.OF PINS	Contact	Plating	INSULATOR	B:Black	PACKING
4~100P	Full Of Gold	Semi-gold	MATERIAL:	G:Grey427	A:PE Bag
	A0=0.8u"	B0=0.8U"	B:PA6T	E:Grey413	B:Tape & Reel
	A1=1u"	B1=1U"	C:PA9T	W:White	C:Tube
	A2=1.5u"	B2=1.5U"	D:LCP	U:Blue	D:Tube+CAP
	A3=2u"	B3=2U"			E:Tray
	A4=3u"	B4=3U"			
	A5=5u"	B5=5U"			
	A6=10u"	B6=10U"			
	A7=15u"	B7=15U"			
	A8=20u"	B8=20U"			
	A9=30u"	B9=30U"			
	S1=Ordinary Tin Plated				
	S2=Matte Tin Plated				
	S3=Tin-plated High-temperature				

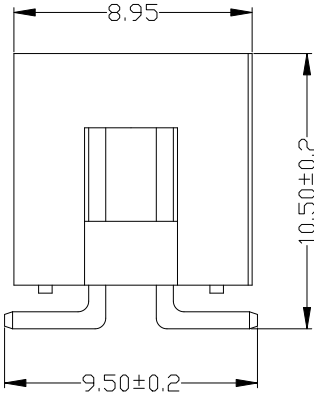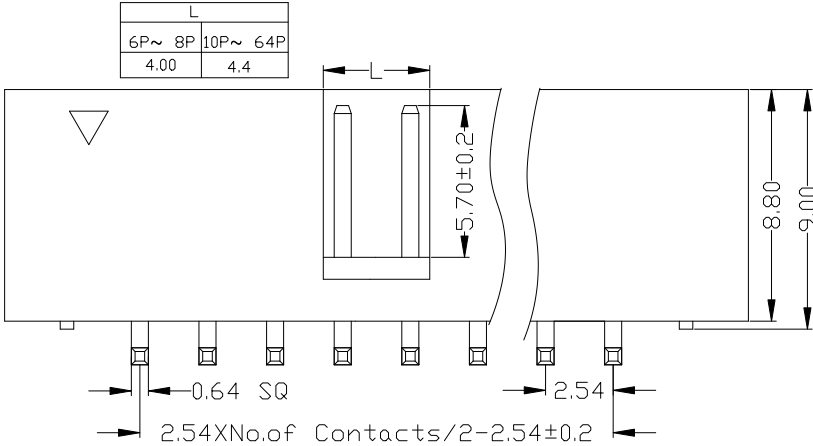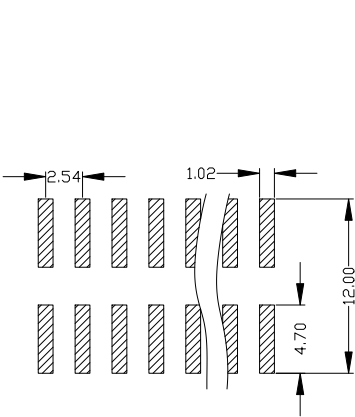

					OPERATION		SCALE		Fit	上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强			
					X.XXX	±0.10	SHEET	1/1	CHECK	PART NO.			
					Angle	±3°	PROJ.	1/1	CHECK	TITLE:			
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	PROJ.	1/1	APPROVE	Customer No.			

上海高霖电子有限公司

卢小强 PART NO. B190-1XXXXXMX1
TITLE: 2.54筒牛 塑高9.0 SMT

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 1 AMP

Raring Current: 1 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

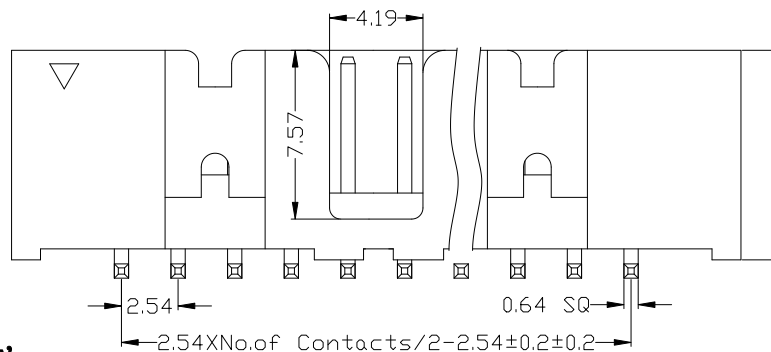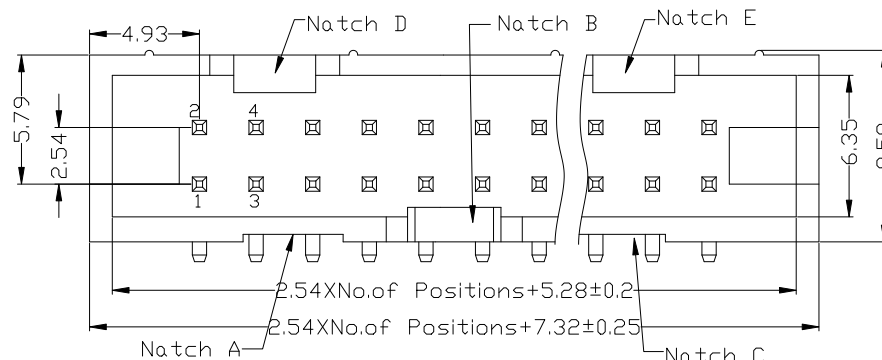

Below 10P With Notch "B" and "c"
10 To 14Pin With Notch "B"/"C"/"D"/"E"
14 To 64Pin With Notch "A"/"B"/"C"/"D"/"E"

Ordering Information

B194-1 XX XX X M X X

NO.OF PINS	Contact Plating	INSULATOR	B:Black	PACKING
4~100P	Full Of Gold	Semi-gold	MATERIAL: G:Grey427	A:PE Bag
A0=0.8u"	B0=0.8U"	B:PA6T	E:Grey413	B:Tape & Reel
A1=1u"	B1=1U"	C:PA9T	W:White	C:Tube
A2=1.5u"	B2=1.5U"	D:LCP	U:Blue	D:Tube+CAP
A3=2u"	B3=2U"			E:Tray
A4=3u"	B4=3U"			
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				

					OPERATION		SCALE		Fit	上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	B194-1XXXXXMMX1	
					X.XXX	±0.10							
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.54mm 简牛 塑高9.4 SMT	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.		

上海高霖电子有限公司

卢小强

PART NO.

B194-1XXXXXXMXX1

TITLE:

2.54mm 简牛 塑高9.4 SMT

Customer No.