

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Brass, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

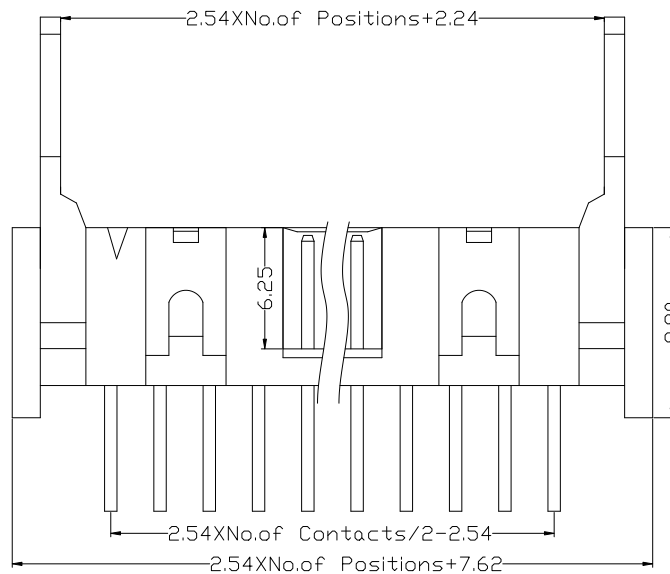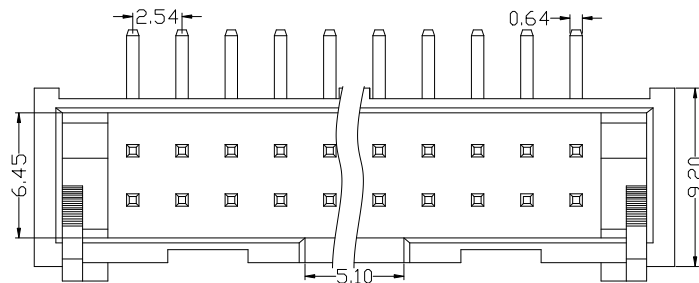

Ordering Information

NO.OF PINS PER ROW 6~64P	Contact Plating Full Of Gold Semi-gold	INSULATOR MATERIAL:	B:Black G:Grey427 E:Grey413 W:White U:Blue	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	A:PBT B:PA6T C:PA9T D:LCP		
S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature				

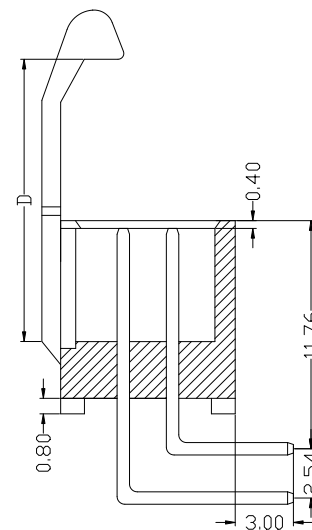

NAME	PARTNO	DIM "D"
Long Latch	E106-1XXXXXXRXX1	14.55
Short Latch	E107-1XXXXXXRXX1	10.65

OPERATION		SCALE		Fit	
X.X	±0.25	UNIT		MM	
X.XX	±0.20	SIZE		A4	
X.XXX	±0.10	SHEET		1/1	
Angle	±3°	PROJ.		APPROVE	
DIM	TOL				

上海高霖电子有限公司

卢小强 PART NO. E10X-1XXXXXXRXX1

TITLE: 2.54mm 牛角 加铁钩 90度

Customer No.




REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
-----	------	--------------------------	--------	---------

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.
Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black
四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

额定电流: 3 AMP
 Rating Current: 3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to +105°C
 Temperature Range: -40°C to +105°C

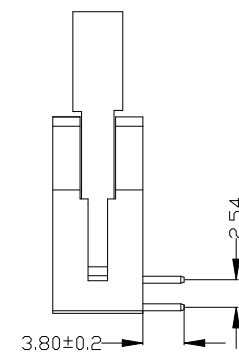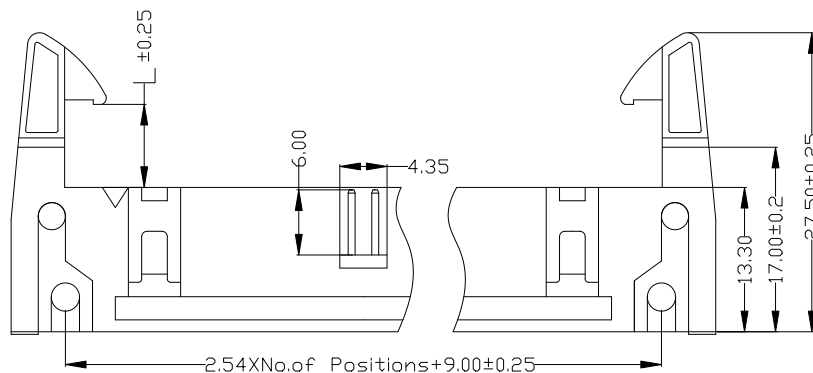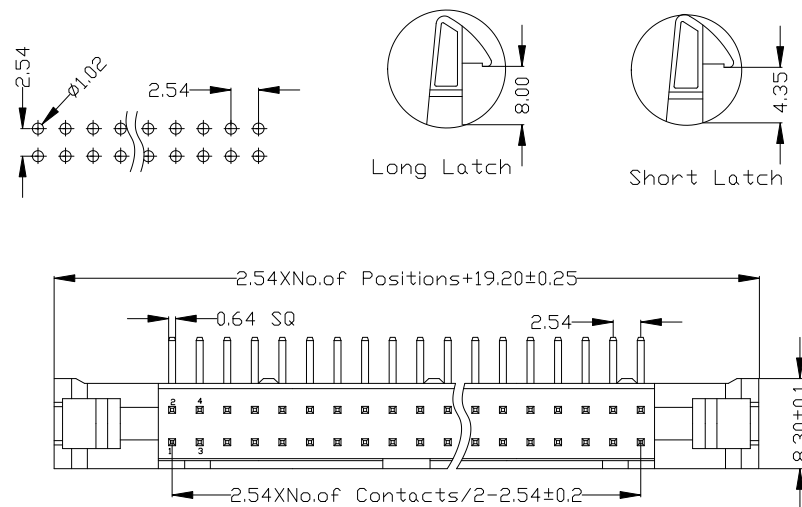

E10X-1 XX XX X R X | A X





1. LONG-EARED	NO. OF PINS	Contact	INSULATOR	B: Black	PACKING
2. SHORT-EARED	6-64P	Full Of Gold	MATERIAL:	G: Grey427	A: PE Bag
		Semi-gold	A: PBT	E: Grey413	B: Tape & Reel
		A0=0.8u"	B: PA6T	W: White	C: Tube
		A1=1u"	C: PA9T	U: Blue	D: Tube+CAP
		A2=1.5u"	D: LCP		E: Tray
		A3=2u"			
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

NAME	PART NO
Long Latch	E101-1XXXXXXRXX1
Short Latch	E102-1XXXXXXRXX1

					OPERATION		SCALE		Fit	上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	E10X-1XXXXXRXX1	
					X.XXX	±0.10							
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.54mm 牛角 90度	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.		

Temperature Range: -40°C to $+105^{\circ}\text{C}$

NO. OF PINS	Contact Plating		INSULATOR	B:Black	PACKING
6-64P	Full Of Gold	Semi-gold	MATERIAL:	G:Grey427	A:PE Bag
	A0=0.8u"	B0=0.8U"	A:PBT	E:Grey413	B:Tape & Reel
	A1=1u"	B1=1U"	B:PA6T	W:White	C:Tube
	A2=1.5u"	B2=1.5U"	C:PA9T	U:Blue	D:Tube+CAP
	A3=2u"	B3=2U"	D:LCP		E:Tray
	A4=3u"	B4=3U"			
	A5=5u"	B5=5U"			
	A6=10u"	B6=10U"			
	A7=15u"	B7=15U"			
	A8=20u"	B8=20U"			
	A9=30u"	B9=30U"			
	S1=Ordinary Tin Plated				
	S2=Matte Tin Plated				
	S3=Tin-plated High-temperature				

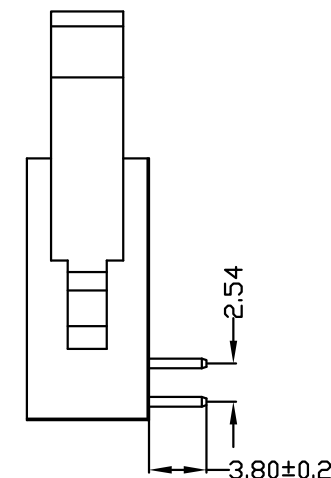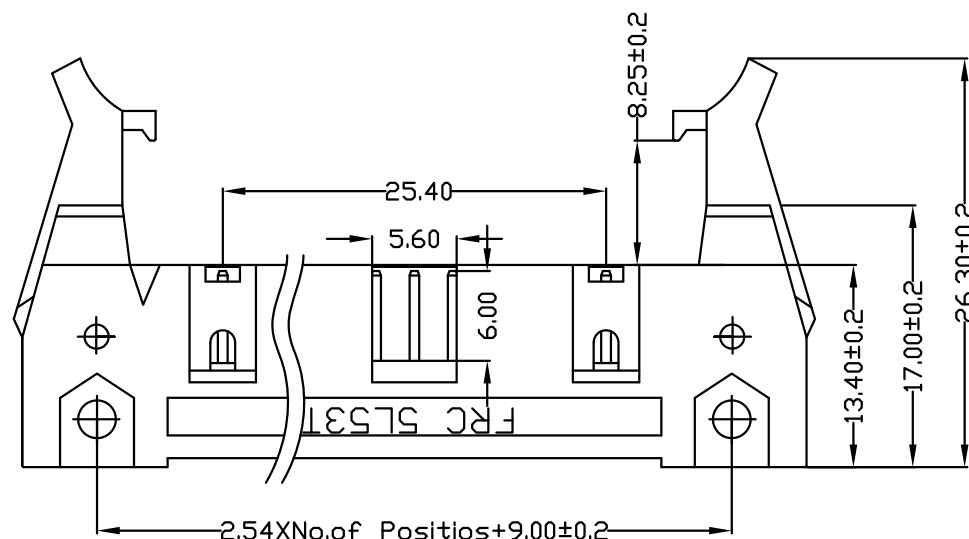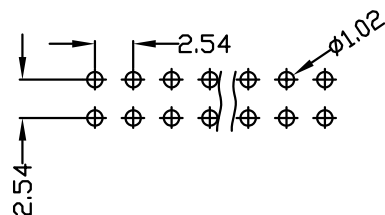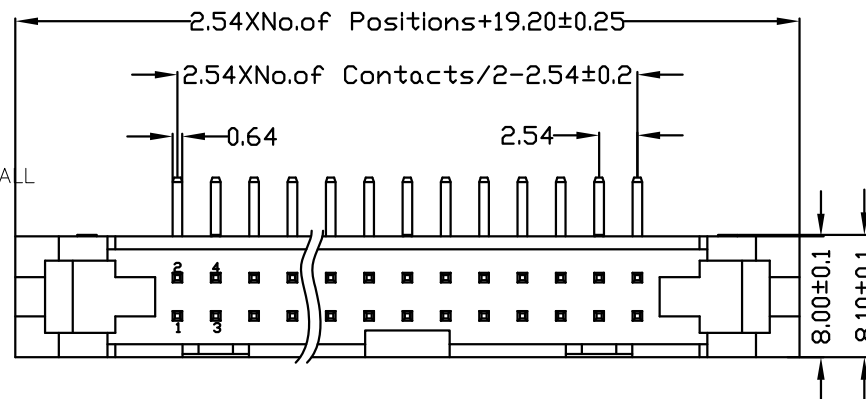

					OPERATION		SCALE		Fit	上海高霖电子有限公司		
					X.X	±0.25	UNIT		MM			
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	E103-1XXXXRXX1
					X.XXX	±0.10						
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.54mm 小耳牛角 90度
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	