

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镀底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.



Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.


温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C

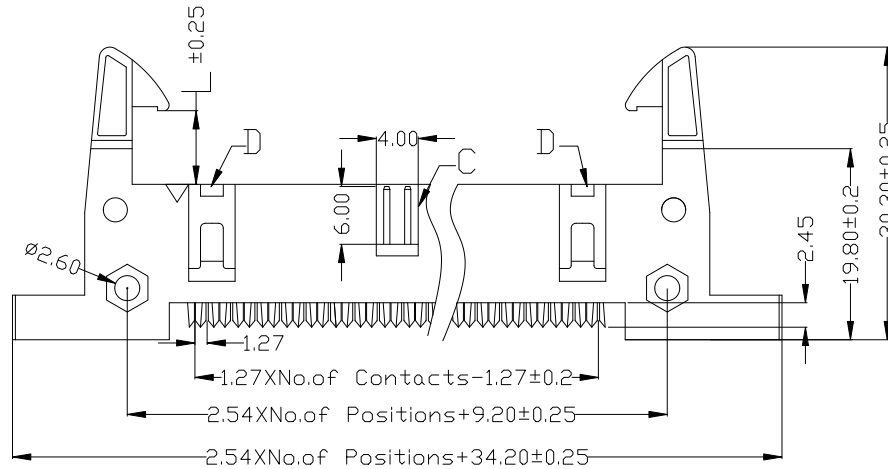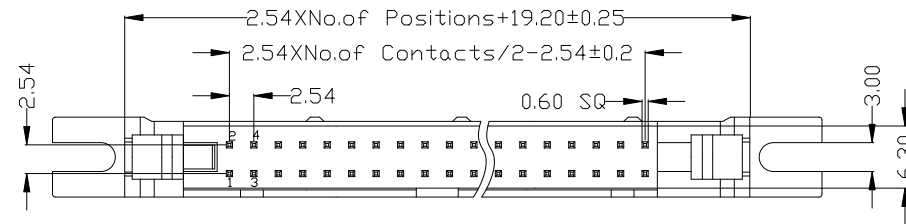


10P-18P With "C" Without "D"

20P-64P With "C" and "D"



Long Latch
L=8.00



Short Latch
L=4.35

Ordering Information

E105-1 XX XX X C X AX

NO.OF PINS
PER ROW
5-64P



Contact Plating
Full Of Gold
A0=0.8u"
A1=1u"
A2=1.5u"
A3=2u"
A4=3u"
A5=5u"
A6=10u"
A7=15u"
A8=20u"
A9=30u"

Semi-gold
B0=0.8u"
B1=1U"
B2=1.5U"
B3=2U"
B4=3U"
B5=5U"
B6=10U"
B7=15U"
B8=20U"
B9=30U"

INSULATOR
MATERIAL:
A:PBT
B:PA6T
C:PA9T
D:LCP

B:Black
G:Grey427
E:Grey413
W:White
U:Blue

PACKING
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray



上海高霖电子有限公司

OPERATION

SCALE

Fit

X.X ±0.25

UNIT

MM

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SIZE

A4

DESIGN

SHEET

1/1

CHECK

PROJ.

APPROVE

APPROVE

卢小强

PART NO.

E105-1XXXXXCXX1

TITLE:

2.54mm 牛角 压线式 刺破带锁

Customer No.

REV DATE MODIFICATION DESCRIPTION CHANGE APPROVE