

Specifications



备注 (Remark)
 1. 材料 (MATERIAL)
 胶芯: PA6T/PBT+30%G. F UL94V-0, 颜色: 黑色.
 Housing: PA6T/PBT+30%G. F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 3 AMP
 Raring Current: 3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to +105°C
 Temperature Range: -40°C to +105°C


Ordering Information

E104-1 XX XX X C X AX


NO. OF PINS PER ROW 5-64P	Contact Plating		INSULATOR MATERIAL:	B:Black G:Grey427 E:Grey413 W:White U:Blue	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
	Full Of Gold	Semi-gold			
A0=0.8u"	B0=0.8u"	A:PBT			
A1=1u"	B1=1U"	B:PA6T			
A2=1.5u"	B2=1.5U"	C:PA9T			
A3=2u"	B3=2U"	D:LCP			
A4=3u"	B4=3U"				
A5=5u"	B5=5U"				
A6=10u"	B6=10U"				
A7=15u"	B7=15U"				
A8=20u"	B8=20U"				
A9=30u"	B9=30U"				
	S1=Ordinary Tin Plated				
	S2=Matte Tin Plated				
	S3=Tin-plated High-temperature				

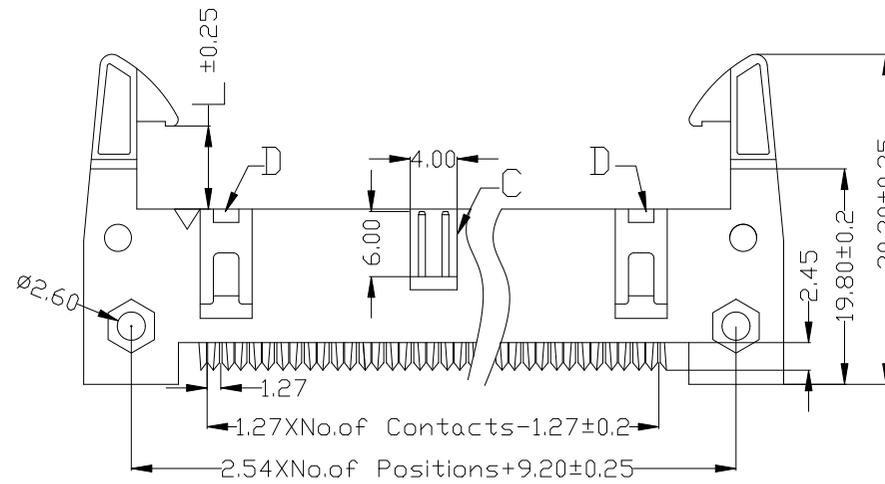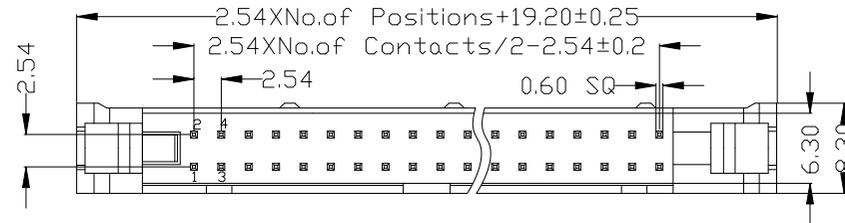


10P-18P With "C" Without "D"
 20P-64P With "C" and "D"



Long Latch
L=8.00



Short Latch
L=4.35



上海高霖电子有限公司

				OPERATION		SCALE		Fit		上海高霖电子有限公司	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	E104-1XXXXXCXX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54mm 牛角 压线式 刺破不带锁
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.	