

△

B

C



D

F

G

H

1

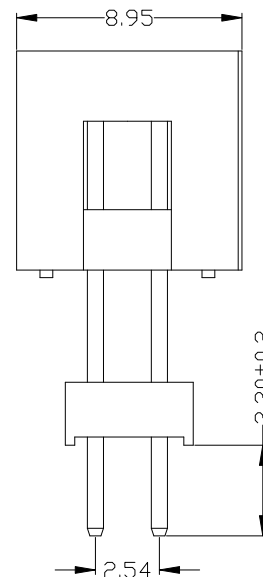

B190-2 XX XX X S X ~~X~~^A 1

NO. OF PINS	Contact Plating		INSULATOR	B:Black	PACKING
4-100P	Full Of Gold	Semi-gold	MATERIAL:	G:Grey427	A:PE Bag
	A0=0.8u"	B0=0.8u"	A:PBT	E:Grey413	B:Tape & Reel
	A1=1u"	B1=1U"	B:PA6T	W:White	C:Tube
	A2=1.5u"	B2=1.5U"	C:PA9T	U:Blue	D:Tube+CAP
	A3=2u"	B3=2U"	D:LCP		E:Tray
	A4=3u"	B4=3U"			
	A5=5u"	B5=5U"			
	A6=10u"	B6=10U"			
	A7=15u"	B7=15U"			
	A8=20u"	B8=20U"			
	A9=30u"	B9=30U"			
	S1=Ordinary Tin Plated				
	S2=Matte Tin Plated				
	S3=Tin-plated High-temperature				

上海高霖电子有限公司

					OPERATION		SCALE		Fit	上海高霖电子有限公司		
					X.X	±0.25	UNIT		MM			
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	B190-2XXXXXSXX1
					X.XXX	±0.10						
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.54筒牛 180度 塑高9.0 加塑胶
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	

B190-2XXXXXSXX1

2.54筒牛 180度 塑高9.0 加塑胶