

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperture Range: -40°C to +105°C

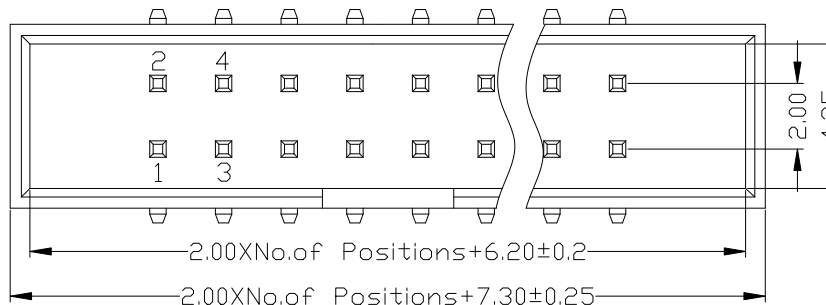

Ordering Information

B257-1 XX XX X M X

NO. OF PINS	Contact Plating	INSULATOR	B: Black	PACKING
4~100P	Full Of Gold	Semi-gold	MATERIAL: G: Grey427	A: PE Bag
A0=0.8u"	B0=0.8U"	B: PA6T	E: Grey413	B: Tape & Reel
A1=1u"	B1=1U"	C: PA9T	W: White	C: Tube
A2=1.5u"	B2=1.5U"	D: LCP	U: Blue	D: Tube+CAP
A3=2u"	B3=2U"			E: Tray
A4=3u"	B4=3U"			
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				



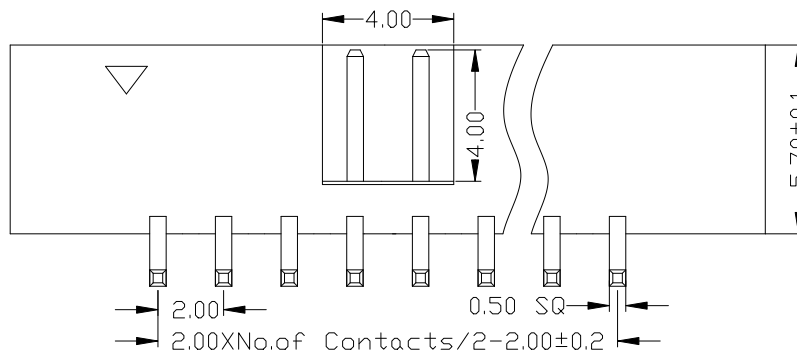



ITEM	H
Standard	0.55 1.00
Alternate	

				OPERATION		SCALE		Fit	上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM				
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	B257-1XXXXXXMXX1	
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.0mm 筒牛 塑高5.7 SMT	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.		

Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.
Housing: PA6T+30%G. F UL94V-0, Color: Black
四方针: 黄铜, 镍底30u"MIN, 表面镀金0. 8u"MIN
Contact: Brass, 0. 8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL
2. 特性 (characteristics):
额定电流: 3 AMP
Raring Current: 3 AMP.
接触阻抗: 20 mΩ MAX.
Contact Resistance: 20mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 500V.
Withstanding Voltage: AC 500V.
温度范围: -40℃ to+105℃
Temperture Range: -40℃ to+105℃

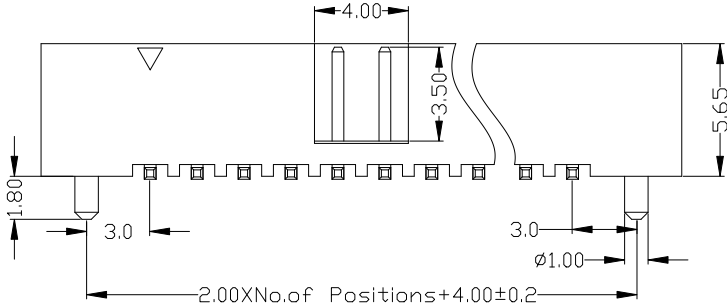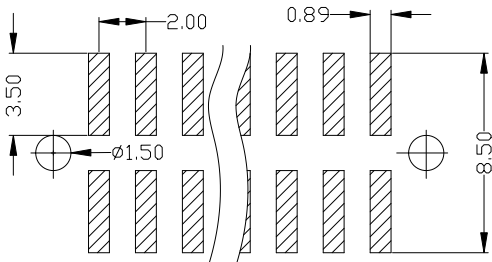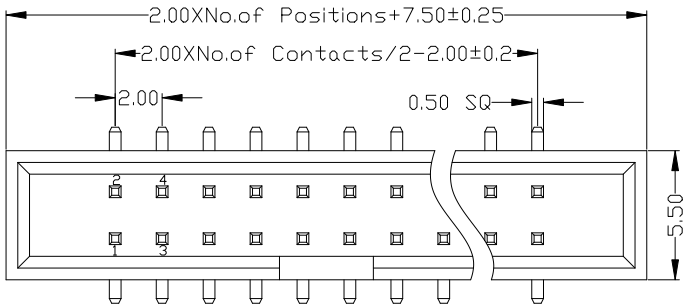

Ordering Information

B257-1 XX XX X M X X 2

NO.OF PINS 4-100P	Contact Plating Full Of Gold A0=0.8u" A1=1u" A2=1.5u" A3=2u" A4=3u" A5=5u" A6=10u" A7=15u" A8=20u" A9=30u"	Semi-gold B0=0.8U" B1=1U" B2=1.5U" B3=2U" B4=3U" B5=5U" B6=10U" B7=15U" B8=20U" B9=30U"	INSULATOR MATERIAL: A:PBT B:PA6T C:PA9T D:LCP	B:Black E:Grey413 W:White U:Blue	PACKING A:PE Bag B:Tape & Reel C:Tube D:Tube+CAP E:Tray
	S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature				

OPERATION

X.X	±0.25
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

SCALE

UNIT

Fit

MM

SIZE

A4

DESIGN

CHECK

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

TITLE:

Customer No.

B257-1XXXXXXMX2

2.00mm 筒牛 塑高5.65 SMT 带柱 L=8.0

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	PROJ.	1/1	2	3	4	5	6	7	8	9	10
-----	------	--------------------------	--------	---------	-------	-----	---	---	---	---	---	---	---	---	----