

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PBT+30%G. F UL94V-0

Housing: PBT+30%G. F UL94V-0

端子: 黄铜、磷铜、青铜

Contact: Brass、Phosphor、bronze

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 30 mΩ MAX.

Contact Resistance: 30 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 1000V.

Withstanding Voltage: AC 1000V.

温度范围: -55°C to +105°C

Temperature Range: -55°C to +105°C

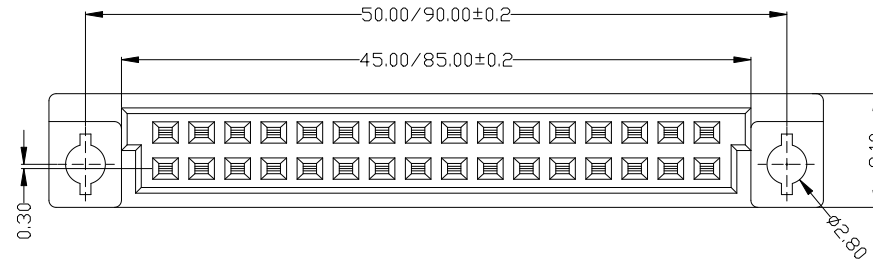




ORDERING INFORMATION

NUMBER OF CONTACTS		Pitch	ROWS/Positions with Contacts	
32	64	2.54	a b	
16	32		a-	
16	32	5.08	a b	

Ordering Information

DINB-2 XX X F S XX N A 1

NO. OF PINS	TERMINAL ALLOT	TYPE	TYPE	Contact Plating
16P Per Row	B=a+b	F=FEMALE	S=180°	Full Of Gold
32P Per Row	D=a	M=MALE	R=90°	Semi-gold
				A0=0.8u"
				A1=1u"
				A2=1.5u"
				A3=2u"
				A4=3u"
				A5=5u"
				A6=10u"
				A7=15u"
				A8=20u"
				A9=30u"
				S1=Ordinary Tin Plated
				S2=Matte Tin Plated
				S3=Tin-plated High-temperature

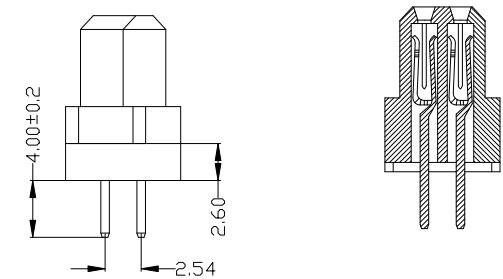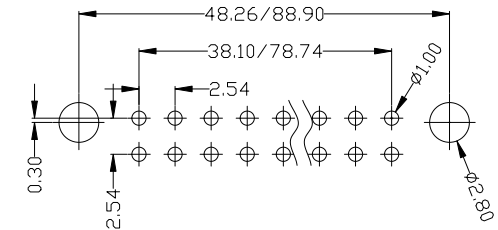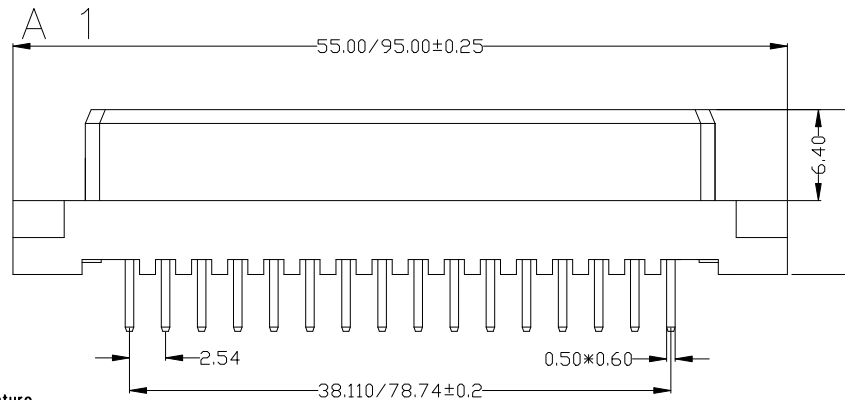

				OPERATION		SCALE		Fit	上海高霖电子有限公司		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强		
				X.XXX	±0.10	SHEET		CHECK			
				Angle	±3°	PROJ.		APPROVE	PART NO.		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL				
									DINB-2XXXXFSXXNA1		
									TITLE: 欧式插座 双排 180度 母座		
									Customer No.		

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PBT+30%G. F UL94V-0

Housing: PBT+30%G. F UL94V-0

端子: 黄铜、磷铜、青铜

Contact: Brass、Phosphor、bronze

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 30 mΩ MAX.

Contact Resistance: 30 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 1000V.

Withstanding Voltage: AC 1000V.

温度范围: -55°C to +105°C

Temperture Range: -55°C to +105°C

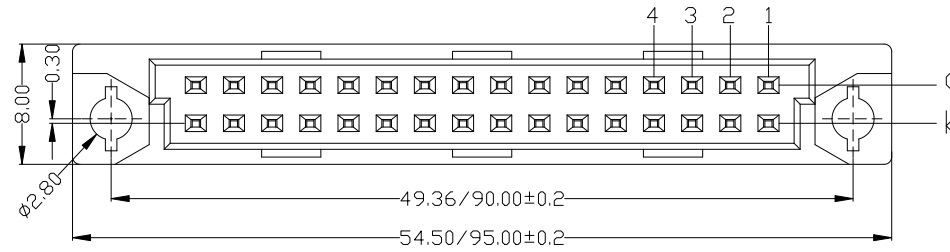




ORDERING INFORMATION

NUMBER OF CONTACTS		Pitch	ROWS/Positions with Contacts	
32	64	2.54	a b	a b 1 2 3 4
16	32		a -	a b + + + +
16	32	5.08 HALF-LOADED	a b ALL EVEN NO.	a b + + + + 1 2 3 4

Ordering Information

DINA-2 XX X F S XX N A 1

NO. OF PINS	TERMINAL	ALLOT	TYPE	TYPE	Contact Plating
16P Per Row	B=a+b		F=FEMALE	S=180°	Full Of Gold
32P Per Row	D=a		M=MALE	R=90°	Semi-gold
					A0=0.8u"
					A1=1u"
					A2=1.5u"
					A3=2u"
					A4=3u"
					A5=5u"
					A6=10u"
					A7=15u"
					A8=20u"
					A9=30u"
					S1=Ordinary Tin Plated
					S2=Matte Tin Plated
					S3=Tin-plated High-temperature

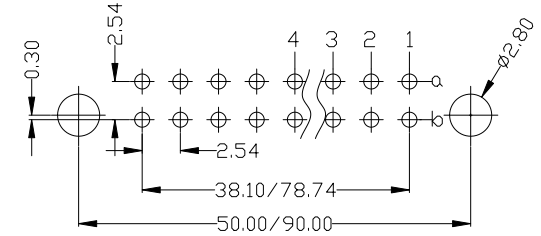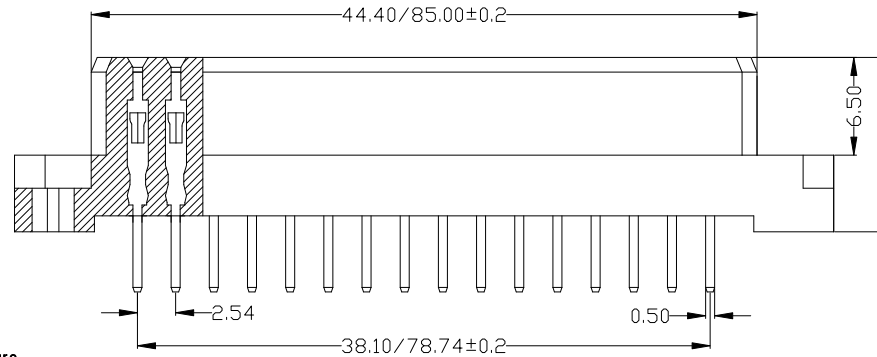

						OPERATION		SCALE		Fit	上海高霖电子有限公司			
						X.X	±0.25	UNIT		MM				
						X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	DINA-2XXXXFSXXNA1	
						X.XXX	±0.10							
						Angle	±3°	SHEET	1/1	CHECK		TITLE:	欧式插座 双排 180度 母座	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	