

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PBT+30%G. F UL94V-0

Housing: PBT+30%G. F UL94V-0

端子: 黄铜、磷铜、青铜

Contact: Brass、Phosphor、bronze

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 30 mΩ MAX.

Contact Resistance: 30 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 1000V.

Withstanding Voltage: AC 1000V.

温度范围: -55°C to +105°C

Temperture Range: -55°C to +105°C

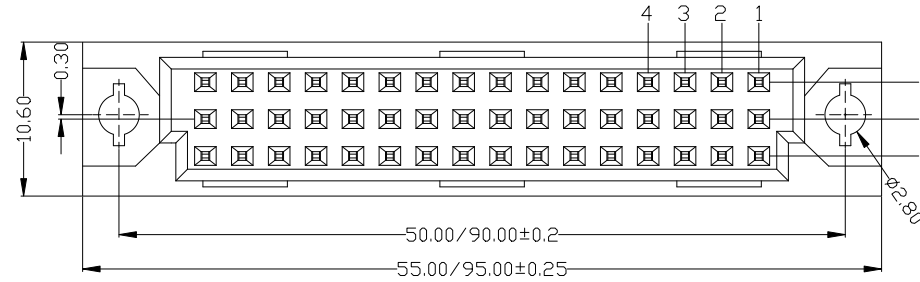




ORDERING INFORMATION

NUMBER OF CONTACTS		Pitch	ROWS/Positions with Contacts	
48	96	2.54	a+b+c	1 2 3 4 5 c 00 00 00 00 b 00 00 00 00 a 00 00 00 00
32A	64A		a+c	1 2 3 4 5 c 00 00 00 00 b 00 00 00 00 a 00 00 00 00
32B	64B		a+b	1 2 3 4 5 c 00 00 00 00 b 00 00 00 00 a 00 00 00 00
16	32		a	1 2 3 4 5 c 00 00 00 00 b 00 00 00 00 a 00 00 00 00
24	48	5.08	a+b+c	1 2 3 4 5 c 00 00 00 00 b 00 00 00 00 a 00 00 00 00
		HALF-LOADED	ALL EVEN NO	
16	32		a+b	1 2 3 4 5 c 00 00 00 00 b 00 00 00 00 a 00 00 00 00
			ALL EVEN NO	

Ordering Information

DINA 3 XX X F S XX N A 1

NO. OF PINS	TERMINAL	ALLOT	TYPE	TYPE	Contact Plating
16P Per Row	A=a+b+c		F=FEMALE	S=180°	Full Of Gold
32P Per Row	B=a+b		M=MALE	R=90°	Semi-gold
	C=a+c				A0=0.8u"
	D=a				A1=1u"
					A2=1.5u"
					A3=2u"
					A4=3u"
					A5=5u"
					A6=10u"
					A7=15u"
					A8=20u"
					A9=30u"
					S1=Ordinary Tin Plated
					S2=Matte Tin Plated
					S3=Tin-plated High-temperature

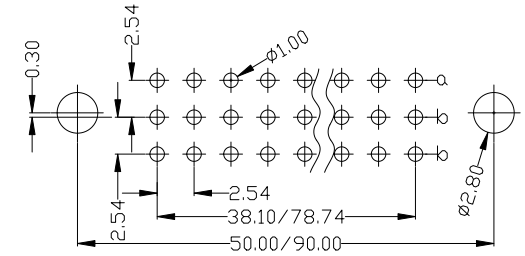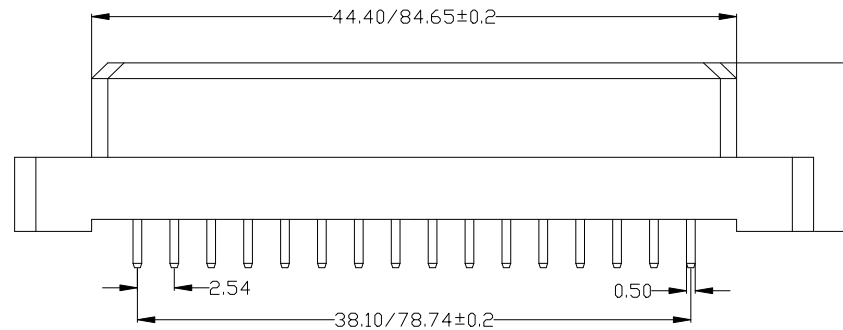

DIM "A" 2.50 4.00

						OPERATION		SCALE		Fit	上海高霖电子有限公司			
						X.X	±0.25	UNIT		MM				
						X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	DINA—3XXXXFSXXNA1	
						X.XXX	±0.10							
						Angle	±3°	SHEET	1/1	CHECK		TITLE:	欧式插座 三排 180度 母座	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE	Customer No.		

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PBT+30%G. F UL94V-0

Housing: PBT+30%G. F UL94V-0

端子: 黄铜、磷铜、青铜

Contact: Brass、Phosphor、bronze

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 30 mΩ MAX.

Contact Resistance: 30 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 1000V.

Withstanding Voltage: AC 1000V.

温度范围: -55°C to +105°C

Temperature Range: -55°C to +105°C

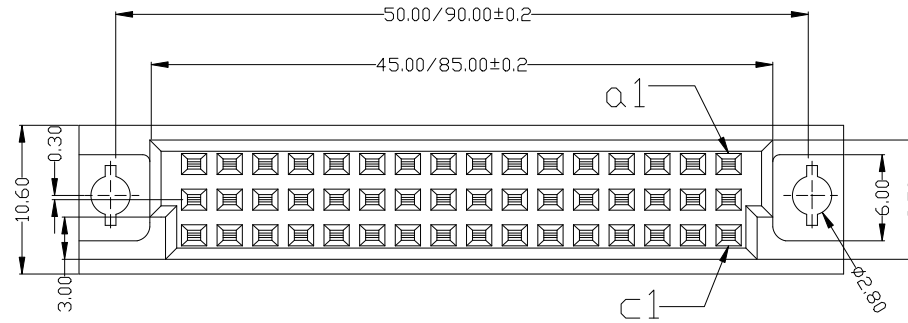




ORDERING INFORMATION

NUMBER OF CONTACTS	Pitch	RDWS/Positions with Contacts
48	96	a+b+c
32A	64A	a+c
32B	64B	a+b
16	32	a
24	48	a+b+c ALL EVEN NO
16	32	a+b ALL EVEN NO

Ordering Information

DINB-3 XX X F S XX N

NO. OF PINS	TERMINAL ALLOT	TYPE	TYPE	Contact Plating
16P Per Row	A=a+b+c	F=FEMALE	S=180°	Full Of Gold
32P Per Row	B=a+b	M=MALE	R=90°	Semi-gold
	C=a+c			A0=0.8u"
	D=a			A1=1u"
				A2=1.5u"
				A3=2u"
				A4=3u"
				A5=5u"
				A6=10u"
				A7=15u"
				A8=20u"
				A9=30u"
				S1=Ordinary Tin Plated
				S2=Matte Tin Plated
				S3=Tin-plated High-temperature

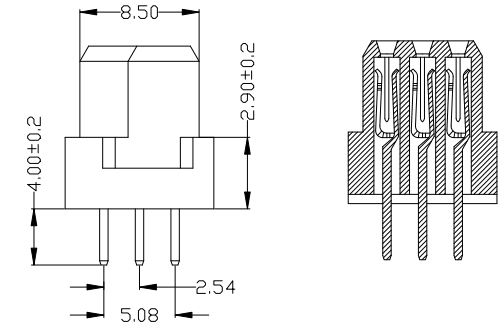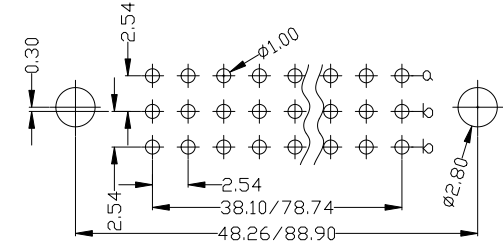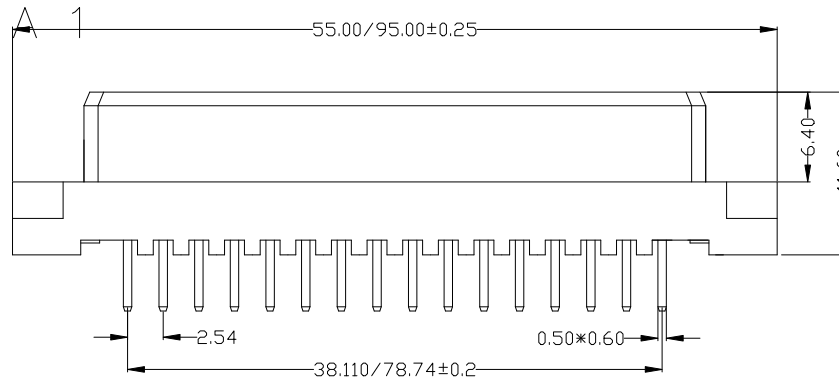

OPERATION

X.X	±0.25
X.XX	±0.20
X.XXX	±0.10
Angle	±3°

SCALE

UNIT	MM
SIZE	A4
SHEET	1/1
PROJ.	1/1

Fit

DESIGN	CHECK
APPROVE	

上海高霖电子有限公司

卢小强

PART NO.

DINB-3XXXXFSXXNA1

TITLE:

欧式插座 三排 180度 母座

Customer No.

REV

1

2

3

4

5

6

7

8

9

10