



Specifications

备注 (Remark)
1. 材料 (MATERIAL)
胶芯: PBT+30%G. F UL94V-0
Housing: PBT+30%G. F UL94V-0
端子: 黄铜、磷铜、青铜
Contact: Brass、Phosphor、bronze
2. 特性 (characteristics):
额定电流: 3 AMP
Raring Current: 3 AMP.
接触阻抗: 30 mΩ MAX.
Contact Resistance: 30 mΩ MAX.
绝缘阻抗: 1000 MΩ MIN.
Insulating Resistance: 1000 MΩ MIN.
耐电压: AC 1000V.
Withstanding Voltage: AC 1000V.
温度范围: -55°C to +105°C
Temperature Range: -55°C to +105°C

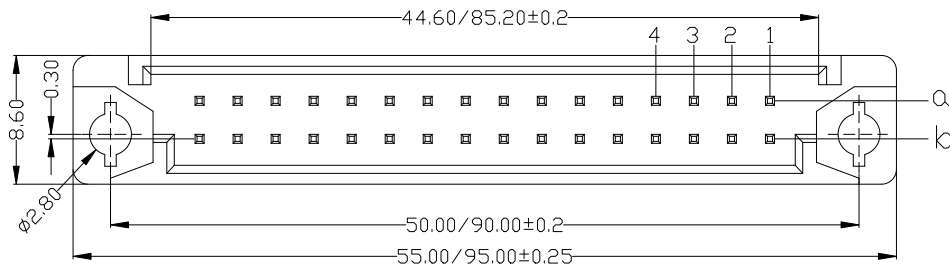

ORDERING INFORMATION



NUMBER OF CONTACTS		Pitch	ROWS/Positions with Contacts	
32	64	2.54	a b	
16	32		a-	
16	32	5.08 HALF-LOADED	a b ALL EVEN NO.	

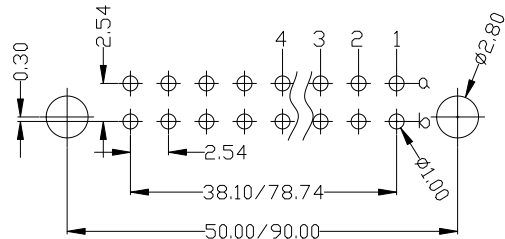

Ordering Information

DINA -2 XX X M S XX N

NO.OF PINS	TERMINAL ALLOT	TYPE	TYPE	Contact Plating
16P Per Row	B=a+b	F=FEMALE	S=180°	Full Of Gold
32P Per Row	D=a	M=MALE	R=90°	Semi-gold
				A0=0.8u"
				B0=0.8u"
				A1=1u"
				B1=1U"
				A2=1.5u"
				B2=1.5U"
				A3=2u"
				B3=2U"
				A4=3u"
				B4=3U"
				A5=5u"
				B5=5U"
				A6=10u"
				B6=10U"
				A7=15u"
				B7=15U"
				A8=20u"
				B8=20U"
				A9=30u"
				B9=30U"
				S1=Ordinary Tin Plated
				S2=Matte Tin Plated
				S3=Tin-plated High-temperature

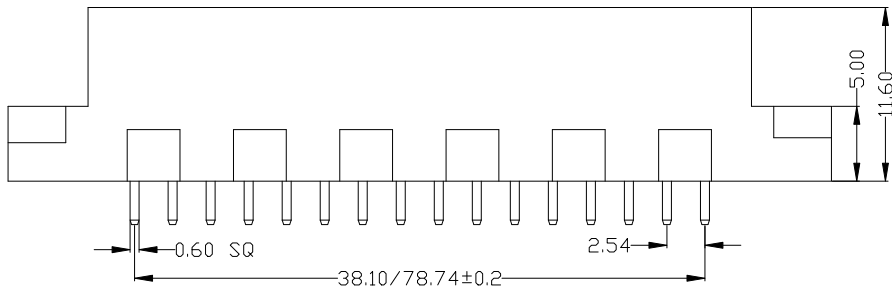

DIM"A" 2.50 4.00

						OPERATION		SCALE		Fit	上海高霖电子有限公司									
						X.X	±0.25	UNIT		MM										
								X.XX	±0.20			SIZE	A4	DESIGN	卢小强	PART NO.	DINA-2XXXMSXXNA1			
								X.XXX	±0.10			SHEET		1/1	CHECK			TITLE:	欧式插座 双排 180度 公座	
								Angle	±3°			PROJ.			APPROVE			Customer No.		
REV	DATE	MODIFICATION DESCRIPTION				CHANGE	APPROVE	DIM	TOL											